

## Acterna SDA-5000 Series Stealth Digital Analyzer

In the world of high-growth subscriber services, engineers and technicians struggle with assignments as diverse as tracking down and fixing ingress, aligning optical nodes, and proof-of-performance. With competitive threats building, cable operators need easy and cost-effective solutions for efficient installation, qualification, maintenance and troubleshooting their HFC networks.

The Acterna SDA-5000 Series of Stealth Digital Analyzers provides a lightweight, weather resistant, rugged, and affordable single instrument with the versatility to test the latest digital services as well as the ideal device for maintaining the analog spectrum. The SDA Series provides seamless forward and return path testing as well as advanced digital testing. A host of invaluable extra options such as QAM analysis and PathTrak Field View are available, enabling the SDA Series to be customized for both the cable operator's network technology level and budget.

The SDA builds on Acterna market leading RF sweep capabilities with numerous new features that ensure engineers can cope with the changing demands of today's network. Backward compatibility with earlier Acterna Stealth and StealthTrak Series products build on a company's existing investment. Automated testing, new "Find and Fix" tools, and easy-to-use graphical user interfaces ensure training time is kept to a minimum. In addition, users familiar with an Acterna Stealth product can transfer their existing expertise to other SDA products without additional training.

### Highlights

- Offers unmatched measurement performance for digital video, data, and traditional analog services in a single instrument
- Increases the efficiency of service calls and reduces troubleshooting time
- Ensures HFC network integrity with the Acterna non-interfering forward and reverse sweep system compatible with today's digital signals
- Enables easy preparation of networks for interactive services with a 5 to 1000-MHz, fast, sensitive spectrum analyzer
- Delivers comprehensive testing of forward and reverse digital services including optional QAM analysis
- Ensures full in-service proof-of-performance with automated tests
- Rugged, weather-resistant, and lightweight

**Offers single-instrument testing of all services**

Acterna SDA Series testers are capable of handling a broad spectrum of interactive testing needs including reverse sweep, multiple-user reverse testing, portable reverse testing, reverse path noise testing, quality forward path digital services with QAM View and in-service cable modem analysis. The SDA-5000 Series of Stealth Digital Analyzers includes the SDA-5000, SDA-5500, and SDA-5510, each of which provides a single-instrument “One Box” solution for engineers and technicians. The main features include:

**Analog testing**


- Non-interfering forward RF sweep
- RF level, fast scan, tilt
- In-service carrier-to-noise, hum, depth of modulation
- Fast spectrum display with CTB/CSO
- Automatic/24-hour testing (FCC and CENELEC compliant)

**Return path testing**

- Non-interfering reverse RF sweep
- PathTrak Field View option pinpoints return path noise
- Reverse Alignment mode prepares network for cable modem deployment
- Reverse noise feature shows accumulated noise/ingress seen at the headend
- Zero Span Spectrum mode
- DOCSIS/DAVIC compatible cable modem analysis

**Advanced digital testing**

- Acterna digiCheck average power
- QAM View digital analysis with modulation error ratio (MER), pre/post FEC BER, constellation, and exclusive noise/ingress under the carrier measurement

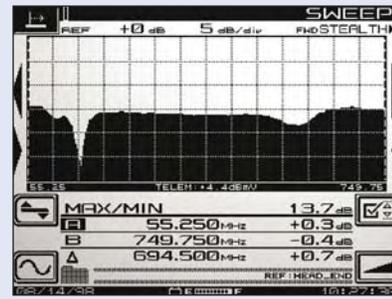


Forward and reverse non-interfering Sweep enables easy preparation of networks for interactive services

**Sweep is the right solution**

The majority of all transmission errors (including digital) are found by measuring the frequency response of the network. Every physical error in the network that influences the transmitted signals will be revealed in the sweep trace. This means the sweep results are independent of transmission methods and formats.

When maintaining and setting up the HFC network, the goal is to transmit all signals with the best noise specifications and the lowest intermodulation distortion. Sweep provides the most effective and efficient tool to show the effects and compromises of setting up the correct gain versus frequency.

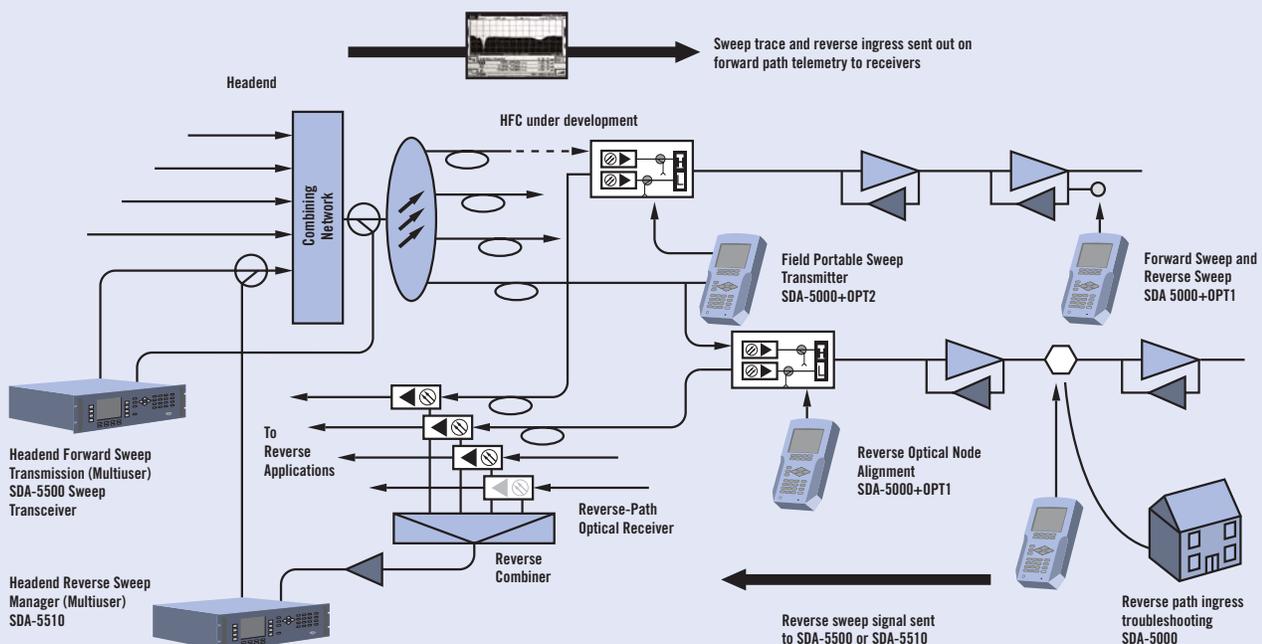

SDA instruments provide a comprehensive set of measurement tools that will follow the expansion of your cable network

### Normalized sweep

To ensure that network specifications are maintained, starting from the headend to the subscriber, each section of the network has its own set of specifications. A normalized sweep divides the network into easily managed sections. Each of these network sections can be designated to an individual team or contractor and tested to its own specifications and quality standards.

The SDA Series uses a variation of Acterna original market-leading Stealth Sweep technology. Existing video carriers (analog, digital, or scrambled) are referenced when possible, eliminating any possibility of interference to the subscriber services. Where carriers are absent, the SDA-5500 transceiver at the headend transmits a sweep to fill vacant spectrum areas. To remove effects of headend level drift, the SDA-5500 transceiver monitors the levels and transmits new reference information with every sweep. This means that if the signal levels are changing in the headend, they will not affect the sweep response measurement. The SDA-5500 transceiver has all of the measurement capability of the SDA-5000 receiver enabling the technician to check headend levels.

The SDA Series also offers significantly faster forward sweep speed than earlier instruments, especially in systems that include many digital signals. They can reference 64/256 QAM signal types, removing the need to worry about subscriber interference, or injecting sweep carriers in the guard bands.

### Reverse sweep

The SDA-5000 (with option 1 installed) enables simple and practical testing of the reverse path frequency response, regardless of the frequency (5 to 1000 MHz). It has a built-in reverse sweep transmitter, which means externally generated carriers are not required. Furthermore, the SDA-5500 transmitter and field receivers have frequency agile telemetry, enabling them to communicate on both the forward and reverse paths.

SDA Series instruments enable one person to perform forward and reverse path alignment simultaneously. The operator simply indicates which screen should be displayed – either the response from the headend to the testpoint, or the response from the testpoint to the headend. A reverse sweep can uncover mismatch problems, which reveal themselves as standing waves, or diplex filter roll-offs that can severely hamper the quality of services in the reverse band.


### Multiple-user reverse testing

For intense reverse testing requirements, the rack mounted model SDA-5510 Headend Reverse Sweep Manager handles the reverse sweep job for up to 10 different technicians on the same cluster of nodes. Using the SDA-5510 in conjunction with the model SDA-5500 transceiver provides a full forward and reverse sweep alignment solution. The SDA-5510 can also stand alone in remote hub sites for dedicated reverse alignment applications.


### Seeing headend/hub site accumulated ingress in the field

The reverse noise feature of the SDA-5000 enables easy reverse path noise testing. The operator simply presses the “noise” softkey while reverse sweeping, and the display changes to a noise/ingress response indicating the noise level over the entire reverse path spectrum measured at the headend or hub site.


All SDA transmitters provide feedback to the field regarding the current condition of noise and ingress in the headend, even when noise or ingress is swamping the telemetry (Broadcast mode). A picture of the headend noise/ingress is sent out to the SDA receiver via a special forward telemetry carrier.

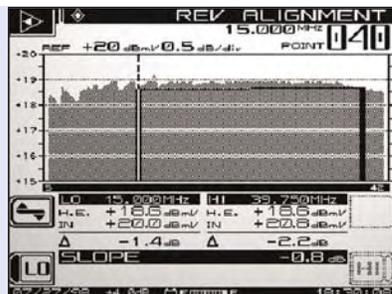

Reverse Alignment mode prepares network for cable modem deployment

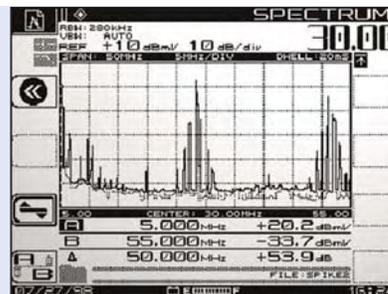

Reverse ingress spectrum display

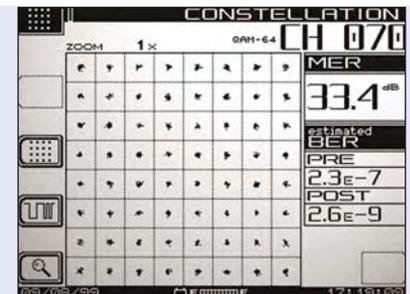

Constellation display with MER and pre/post FEC BER

### QAM View ensures quality forward path digital services

For measurement and analysis of digital TV and forward modem signals, the new digital QAM View option provides a full complement of digital quality measurements. Included is a 64/256 QAM constellation display with zoom, average digital power level, bit error rate (BER), 21 to 35-dB modulation error ratio (MER), and a noise margin “cliff effect” parameter. An equalizer display shows equalizer stress and distance to fault.

In addition, an exclusive Noise mode enables technicians to see ingress/noise under an active digital carrier. This tool is invaluable for detecting forward path ingress otherwise hidden by conventional spectrum views.

### In-service cable modem analyzer

For bursty digital signals such as TDMA technologies used on cable modems for reverse services, the SDA-5000 offers two measurement choices. The first, a one-button cable modem analyzer test, shows carrier-to-noise measurements quickly. The second, an advanced zero span feature, uses a time domain display to allow power measurements while the modem is in service. Both modes are compatible with DOCSIS/EuroDOCSIS, CBR/switched circuit telephony, and proprietary cable modem standards.

### Detecting ingress in the field


When detecting ingress in the field, first the operator looks at the ingress present at the field testpoint using the spectrum display on any of the receivers and then switches to reverse ingress/noise to see the ingress at the headend for comparison. This time-saving procedure helps in locating sources of ingress. An adjustable dwell time ensures that even intermittent ingress is detected. The preamp and lowpass filter also assures that even low-level ingress is seen. The preamp and lowpass filter on the SDA-5000 assures that ingress can be measured on devices with bidirectional testpoints or testpoint values of 30 dB or more.

### PathTrak Field View option


When a network is equipped with the Acterna PathTrak Performance Monitoring System, system technicians can benefit from the ultimate tool to combat ingress – the PathTrak Field View option for the SDA-5000. With Field View, the SDA-5000 receives a return path headend spectrum broadcast from the PathTrak unit and compares it with a return path spectrum at any field testpoint. The side-by-side spectrum comparison instantly reveals to the technician whether the ingress source is originating at the technician’s current testpoint or at a different location. The comparative spectrum technique reduces noise/ingress troubleshooting time dramatically, since the technician can immediately verify whether corrective action performed in the field (local trace) results in improvement in the headend spectrum (remote trace).

### Comprehensive testing


The SDA Series provides an extensive set of signal analysis features designed for proving and improving network quality. Its key capabilities include level measurement, analog and digital signal limits, tilt measurement, scan measurement, in-service carrier-to-noise measurement, hum measurement, modulation measurement, and local amplifier alignment with loopback tests.

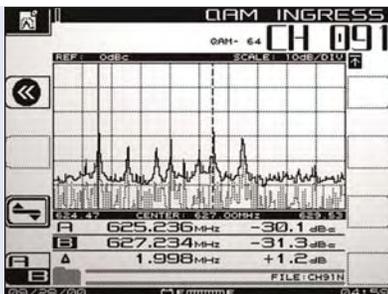

In-service ingress spectrum showing CTB/CISO-intermodulation problems due to analog-TV channels

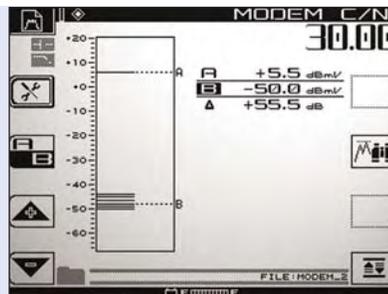

One button, in-service C/N measurements on TDMA return path cable modem signals (DOCSIS, EuroDOCSIS, EuroModem)

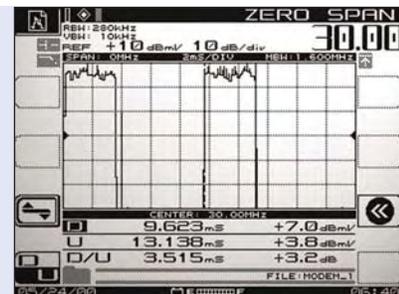

Zero span/time domain expert mode, showing the TDMA bursty return path cable modem power ramp of 3.5 ms

### Level measurement

The SDA instruments have a comprehensive single-channel level display with tuned channel, video frequency and level, audio frequency and level, and the difference between video and audio carrier levels.

Making accurate digital average power measurements is addressed with the digiCheck measurement function. The digiCheck feature is compatible with most non-bursty digital modulations in use today (that is, 16, 32, 64, 128, and 256 QAM, QPR, QPSK, VSB, and CAP16).

### Analog and digital signal limits

Analog signal threshold limits have always been a technician's favorite feature of Acterna instruments. Automatic limit checks provide a quick GO/NO-GO status for audio and video levels. The SDA Series extends this capability with a dedicated digital limit set that can be applied exclusively to the forward digital carriers defined in a channel plan. By assigning separate analog and digital limits, test time is reduced, since no calculation is necessary to determine if analog and digital level relationships are within system specifications. Analog and digital limit capability is available in both the Scan and Autotest modes.

### Tilt measurement

Tilt is the easiest and most efficient tool for balancing amplifiers. For cable plants requiring multiple tilt measurements, such as comparing today's tilt measurement with a historical record and then making an additional measurement for a new wider channel plan, the technician simply uses markers to indicate the tilt channels that define the new limits with the SDA Series.

### Intermodulation distortion

Intermodulation distortion (CSO/CTB) can be automatically measured using the CTB/CSO mode from the spectrum analyzer. CTB/CSO distortions produced by intermodulation of analog TV carriers can degrade the signal quality of QAM modulated signals used by digital video and cable modems.

### Scan measurement

The SDA Series Scan mode provides a quick graphical view of the entire channel plan with bars representing the video level for each channel. Both video and audio may be displayed.

### Carrier-to-noise measurement: in-service


Carrier-to-noise measurements (on a non-scrambled channel) is just as easy with the SDA Series and there is no need to remove modulation from the video carrier. No tunable preselector filter is needed.

### Hum measurement: in-service


Measuring hum on a channel (non-scrambled) is as simple as pressing the "HUM" key with the versatile Acterna SDA Series. Since the instrument is battery powered, the measurement is independent of ground loops and is, therefore, isolated from the line (mains). Hum is revealed as either single (60 Hz) or double (120 Hz) horizontal bars across the video screen.

### Modulation measurement


SDA Series modulation measurements include NTSC, PAL, and SECAM formats. Demodulation of the audio is done for both AM and FM. FM is used to hear audio distortion on the FM radio channels or the sound of the TV program. AM is used to recognize short-wave interference signals in the reverse band.

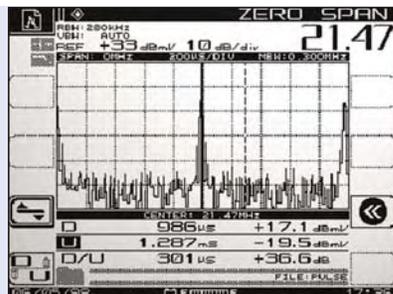

Time domain view of ingress in the Zero Span mode captures elusive ingress

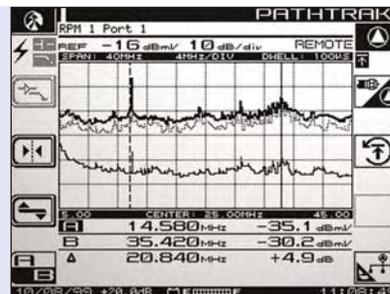

PathTrak Field View option compares headend node spectrum with field testpoint spectrum

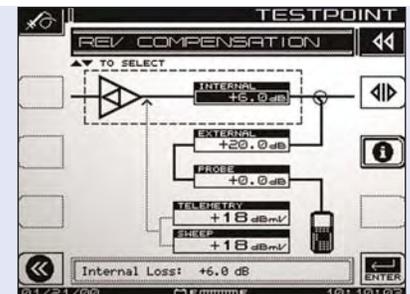

Graphical reverse testpoint compensation

### Local amplifier alignment w/loopback tests

The SDA Series' loopback tests enable the technician to perform frequency response measurements of active or passive field devices. Either a CW or sweep signal may be generated from the SDA instrument and injected to the input of a device under test. The DUT output can then be measured by the SDA, providing valuable information such as gain, loss, roll-off, or frequency response. The CW loopback test is available on the SDA-5000 with option 1. The CW loopback and sweep loopback features are available on the SDA-5000 with option 2.

### Provides the right solution for varying network needs

The SDA Series includes three models with multiple extra options ensuring that all testing needs, from portable in-the-field hub testing to rack-mounted, headend or hub requirements are catered to. The three models are also designed to interoperate with earlier Acterna Stealth models.

Field usage is covered by the SDA-5000. The SDA-5000 can be tailored with various options to meet the most demanding forward and reverse sweep needs.

Headend/hub usage is covered by the SDA-5500 and SDA-5510. The SDA-5500 provides forward sweep and single-user reverse sweep while the SDA-5510 provide multi-user reverse sweep. Full forward and reverse sweep alignment can be achieved by using the SDA-5510 in conjunction with the model SDA-5500 transceiver. The SDA-5510 can also be used alone in remote hub sites for dedicated reverse alignment applications.

For networks that do not provide a practical location to install a rack mounted SDA-5510, (that is, systems where reverse traffic is received by an ATM/SONET/SDH network rather than returning to the headend) the SDA-5000 with option 6 provides all the functionality of the SDA-5510, (Note: forward sweep capability is not included with SDA-5000 with option 6).

### Stealth Sweep compatibility


The SDA Series is completely sweep compatible with Stealth 3SR, 3ST, 3HRV, and StealthTrak SSA-1000 Series instruments. The only requirement is that Firmware version 9.3 is installed in Stealth instruments, and Firmware version 2.0 installed in StealthTrak SSA-1000 instruments. To take full advantage of the faster forward sweep capability, all headend and field instruments must be SDA Series.

### Upgrading from Stealth to SDA


The Acterna upgrade program is designed to protect customers' investments in test equipment. Any model 3SR, 3ST, or 3HRV can be upgraded to the SDA Series at any of Acterna world-wide service centers, and customers who own a model SSA-1000 can upgrade to the SDA Series with an in-the-field Firmware change only.

### Extensive automated test capability


The SDA Series offers a practical user interface, which normally only requires the push of a button to operate, and its built-in automation significantly reduces the cost of ownership to businesses.

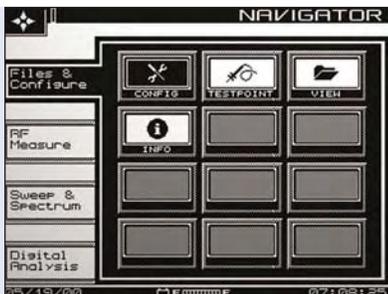

The Navigator user interface, common on all Acterna SDA meters

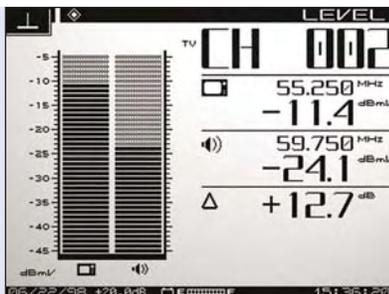

The single-channel level display shows both video and audio levels (either single or dual sound/ NICAM) and the difference between the two

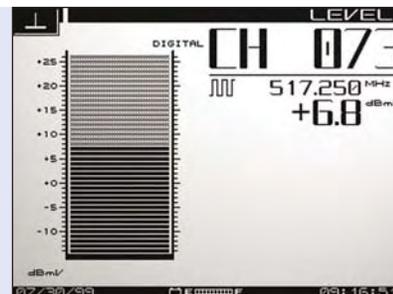

Digital channel average power measurements can be made using the digiCheck™ feature

Automated tests can be scheduled to perform either 24-hour FCC compliance tests, or initiated immediately to log performance at individual nodes, amplifiers, or other testpoints. A wide range of tests can be performed automatically, including signal levels, C/N, hum, and depth of modulation. The operator designates which tests to perform on which channels. Because these tests are non-intrusive, it is easy to test all parameters on all channels at any time.

After a test is performed, the results can be displayed on the SDA screen. A PASS/FAIL indication on a variety of limits can be set for FCC/CENELEC or other government standards, or system preferences. Data taken during any automated test, or sequence of automated tests, can be viewed immediately with a PASS/FAIL indication for each of the limits. Specific stored measurement results may be viewed on demand.

### Data analysis with StealthWare


Test results can be printed directly to a serial printer or uploaded to a PC using Acterna StealthWare, a Microsoft® Windows®-based data management package, to store and include in custom reports. Stored sweep, scan, or spectrum screens can be viewed on the PC and analyzed with marker movement and readout information in just the same way as on the actual instrument. A sweep graph overlay function allows comparison of multiple RF response variations over time. Old sweep graphs may be downloaded back into the SDA instrument for real-time comparison.

### Powerful and intuitive standardized graphical displays


All measurement results are presented to the user in clear, highly informative, summary displays. The graphics present the information the way the technician wants to see the results, with no further interpretation required. For example, testpoint compensation values are entered at the start of testing. Displays then calculate actual levels automatically, minimizing field errors.

### Reduced training time

With SDA Series products, all levels of instruments are familiar to the technician, regardless of which is learned first, because the same user interface conventions are used across all product families. The time needed for a trainee technician to learn to use the instrument is considerably shorter than with alternative test equipment. This means urgent upgrade projects make the most efficient use of limited resources when SDA Series products are used.

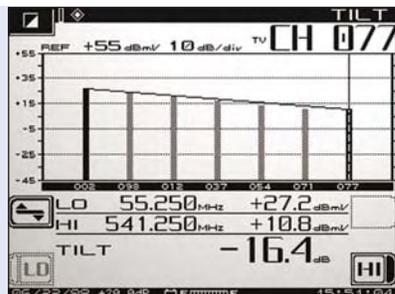

Tilt mode performs automatic tilt calculations between any two of nine designated carriers

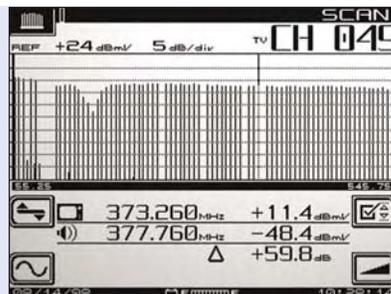

Limit checks can be instantly viewed after identifying channel of interest with a marker in Scan mode display



In-service carrier-to-noise

### Acterna Basic Service packages

To ensure the highest levels of support for SDA purchasers, Acterna offers the Basic Service for instrument package. Designed to provide the foundation for maximizing the features and usage of SDA equipment, Acterna's Basic Service package offers the following degrees of service and support only Acterna can provide. This includes:

- An extended warranty of up to five years
- Annual calibration – fully traceable to meet NIST standards

These core services provide the foundation for a longer product life, help you realize greater meter functionality and maximize your Acterna investment. Ask your sales representative or call the Acterna Customer Care Center for more information.

### Technology training

Acterna provides a comprehensive Cable Networks technology training program designed to help you and your teams understand the changing needs of today's advanced networks. Training seminars include:


- HFC basics
- Sweep and balance forward and return
- Sweep 101 "Bootcamp"

### Application features


Application	Feature	SDA-5000	SDA-5500	SDA-5510
Full frequency response testing	Forward sweep mode using headend transmission	•	•	
Reverse path alignment for new digital services	Reverse Sweep mode	•		
Prepare for cable modem deployment	Reverse Alignment mode	•		
View return distortion and ingress as captured at headend	Reverse ingress/noise PathTrak Field View option	•	•	
Reverse path ingress troubleshooting	Built-in low-pass filter and preamp, dwell time	•		
Handle multiple reverse path sweep tests at one time	Multiple user reverse sweep reception (up to 10 simultaneous users)			•
Proactive reverse path maintenance capability	PathTrak Field View option	•		
Forward sweep without headend support	Sweepless Sweep using carrier levels only	•		
Forward path sweep carrier transmission	Forward transmission of sweep carriers	•	•	
Quick scan of active channel plan	SCAN mode w/limit check	•	•	•
View local distortion and ingress	Spectrum display	•	•	•
View and measure cable modem carriers on return path (DOCSIS/DAVIC)	Zero Span TDMA Time Domain mode	•	•	•
Test forward path digital services	digiCheck and QAM view option	•	•	•
CSO/CTB measurements	CSO/CTB mode	•	•	•
Amplifier checks and alignment	TILT mode	•	•	•
Local Amplifier and optical node alignment	CW Loopback (opt. 1 or 2) Sweep Loopback (opt. 2 only)	•		
In-service carrier-to-noise measurement	C/N mode	•	•	•
Analog and digital level measurements	LEVEL mode digiCheck mode	•	•	•
Depth of modulation measurements	MOD mode	•	•	•



In-service "HUM" (PAL and NTSC compatible)

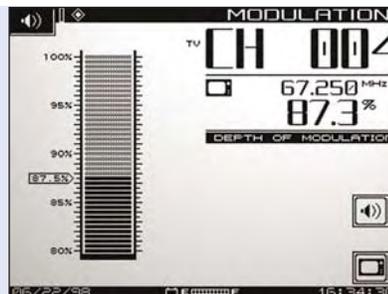

Depth of modulation

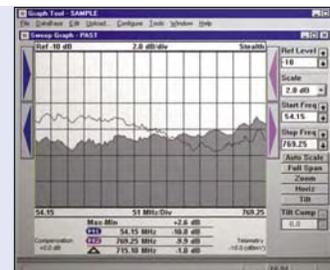

Detailed forward/ reverse sweep graph offers adjustable markers, scale, reference level and tilt. Users can clearly distinguish between previous and current sweep measurements for easy comparison on PC StealthWare display

Start with any **SAM-4040 or 4040D**  
 Optional:  
 PathTrak Field View (4040D)

A) Firmware  
 B) Hardware & Firmware

Upgrade to **SDA-4040D**  
 Standard:      Optional:  
 DigiCheck      PathTrak  
 ZeroSpan      Field View  
 Dig Spectrum

Add **Option 4** for: QAM View

Any Stealth can upgrade to **SDA-5000** for:  
 5 x faster sweep  
 256 QAM compatible sweep  
 Improved TP Comp setup for reverse sweep  
 A) Firmware  
 B) Hardware & Firmware

**SDA-5000** units can be purchased with, or upgraded to:  
 QAM View  
 PathTrak Field View

Any 3ST can be upgraded to **SDA-5000** for faster forward sweep and digital signal sweep compatibility

Any 3HRV can be upgraded to **SDA-5510**

**Stealth to SDA series – product upgrade/replacement guide**

<i>Stealth model</i>	<i>SDA replacement</i>
3SR	SDA-5000
3SR + 3SRV option	SDA-5000 with Option 1
3SR + 3SRT option	SDA-5000 with Option 2
3ST	SDA-5500
3HRV	SDA-5510
SSA-1000	SDA-5000 with Option 2 (Firmware only)
SAM 4040	SDA-4040D
SAM-4040D	SDA-4040D (Firmware only)

**Specifications**

**Frequency**

Range	5 to 1000 MHz
Accuracy	±10 ppm at 25°C; ±10 ppm drift over temp ±3 ppm/year aging
Resolution bandwidths	30, 280 kHz and 2 MHz (30 kHz for CTB/CSO only)
Tuning resolution	10 kHz
Sweep resolution	250 kHz maximum

**Level measurement**

Range	-40 to +60 dBmV
Resolution	0.1 dB
Accuracy	±1.0 dB from -20 to +50°C <sup>(1,2)</sup>
Log linearity	±0.5 dB <sup>(1)</sup>
Flatness	±0.5 dB <sup>(3)</sup>
Signal types	CW, single carrier, video (single or dual audio/NICAM), audio, digital
Uncertainty for digital carrier	additional ±0.5 dB (digital types 16/32/64/256 QAM, QPR, QPSK, VSB, CAP-16, DVB/ACTS and TDMA using Zero Span Spectrum mode) at 280 kHz RBW

**Carrier-to-noise<sup>(4)</sup>**

In-service measurement. Non-scrambled channels only. No preselection required for 78 channels or less. Best dynamic range at +10 dBmV or higher input.	
Range	≥ 52 dB <sup>(1)</sup>
Resolution	< 0.5 dB

**Hum measurement**

In-service measurement. Carrier > 0 dBmV. Non-scrambled channels only.	
Range	0 to 10%
Resolution	< 0.2%
Accuracy	±0.7%

**Depth of modulation**

Assumes presence of white reference on any VITS line. Non-scrambled channels only. Audio demodulation of AM and FM carriers.	
Range	80 to 100%
Resolution	< 0.5% at 85%
Audio demodulation	AM and FM Carriers

**Tilt measurement**

Up to nine pilot carriers or video channels with tilt and level measurements on the highest and lowest.	
Hi-lo Δ resolution	0.1 dB

**Scan mode**

All video, audio, pilot carrier, and digital channel levels displayed.	
------------------------------------------------------------------------	--

### Sweep mode

(SDA-5000 and 5500 only)

Frequency range	5 to 1000 MHz
Display span	User definable
Display scale/range	6 vertical divisions 1, 2, 5, or 10 dB/division
Sweep pulse occupied bandwidth	30 kHz
Stability	±0.5 dB, normalized (dependent on stability of referenced carriers)
Sweep rate	~1 second (78 channels, including scrambled and digital signal types)
Channel plan templates (user editable)	China-1; China-2; France; HDTV-NL; Ireland; Japan; Jerold; Jerold-HRC; Jerold-IRC; NCTA; NCTA-HRC; NCTA-SUB; NCTA-IRC; NTSC-Broadcast; OIRT-D/K; PL-B/G; PAL-UK

### Spectrum mode

Spans	3, 5, 10, 20, and 50 MHz (0.3, 0.5, 1, 2, and 5 MHz/div)
Sweep rates	~1 second updates with spans of 50, 20, 10 and 5 MHz ~1.7 second updates with 3 MHz span
Display scaling and range	0.5, 1, 2, 5, and 10 dB/div 6 vertical divisions
Dwell	programmable 0-25 ms
Spurious free dynamic range	60 dB <sub>3</sub>
Sensitivity without preamp	-40 dBmV 5 to 550 MHz -35 dBmV 550 to 1000 MHz
Sensitivity with preamp	-50 dBmV 5 to 550 MHz -45 dBmV 550 to 1000 MHz
Maximum level with preamp	+50 dBmV

### Zero Span mode

Video BW	> 1 MHz, 100 kHz, 10 kHz, 100 Hz
Resolution BW	2 MHz, 280 kHz, 30 kHz
Measurement BW	1 kHz to 99 MHz compensation programmable
Pulse measurement accuracy	nominal level in 10 µs ±2 dB from nominal in 5 µs (> 1 MHz VBW, 280 kHz RBW)
Sweep times	100 µs to 20 s (1, 2, 5 settings)

### Intermodulation distortion (CSO/CTB)

Range <sup>(5)</sup>	≥ 60 dB
Resolution	0.1 dB

### Forward transmitter

(SDA-5000 with option 2/SDA-5500 only)

Frequency range	5 to 1000 MHz
Output level	+20 to +50 dBmV adjustable in 2 dB increments
Spectral purity	Hars -30 dBc Spurs -35 dBc

### Reverse transmitter

(Requires SDA-5000 with option 1 or 2)

Frequency range	5 to 1000 MHz
Output level	+20 to +50 dBmV, adjustable in 2 dB increments
Spectral purity	Hars -30 dBc; Spurs -35 dBc

### Telemetry

Frequency range	5 to 1000 MHz
Modulation	FSK, 100 kHz deviation
Spectrum required	1.0 MHz vacant bandwidth recommended
Spectral purity	Hars -30 dBc; Spurs -35 dBc

### Data storage

Files stored: auto tests, tilt, channel plans, scan and forward sweep. Also reverse sweep and reverse amp alignment on SDA-5000 with option 1 and/or 2. Spectrum mode (regular with max hold and CSO/CTB). Allocated on demand. The storage capability is simultaneous – more of one file type can be “traded” for less of another. All files stored as database, not as screen picture. (Example: typical mix of files for 78-channel plan: 8 channel plans, 16 sweep references, 80 sweep traces, 40 scan files, 20 spectrum displays and 20 auto tests).

### Serial interface

RS232; Epson, IBM, Seiko, and Diconix Printers

### Input configuration

Connector type	75 Ω type F female (optional 75 Ω type BNC female)
Maximum sustained voltage	AC 100V DC 140V

### General

Display	320 x 240 dot matrix LCD, selectable backlight (SDA-5000 only)
Dimensions	6 x 11 x 3.5 in (15.2 x 27.9 x 8.9 cm)
Weight	5.1 lb (2.3 kg) (with option 1 or 2, 5.5 lb (2.5 kg))
Temperature range operating	-20 to +47°C (-4 to 117°F) (SDA-5500 and SDA-5510 only)
Dimensions	19 x 5.25 x 14 in (48.3 x 13.3 x 35.6 cm)
Weight	15 lb (6.8 kg)
Temperature range operating	0 to +50°C (32 to 120°F)

### Power sources

Battery	field extended-life replaceable, nickel metal hydride 12V/3.5A-hr, 4 hours continuous use on a single charge
---------	--------------------------------------------------------------------------------------------------------------

### AC line (SDA-5000)

Charger input	100 to 250 VAC, 50 to 60 Hz, 0.5 A
Charger output	aux out 16 V at 750 mA Charge 15 V at 750 mA

### AC line (SDA-5500)

	100 to 265 to 63 Hz ~100 VAC 47 to 63 Hz ~100 VA
--	--------------------------------------------------

### PathTrak Field View (opt 3 required)

(SDA-5000 and SDA-5500 only)

Update rate	2x/second (remote trace) ~1x/second (local trace)
Display scaling	5/1/2/5/10/20 dB/div.
Selectable nodes	14 (selectable via PathTrak HCU)

### QAM View option (opt 4)



The QAM View option can be factory installed in any new or existing SDA Series instrument. The specifications and features are in addition to the standard measurement features of the SDA Series. When ordering, please specify option 4a for 8 MHz, DVB-C, ITU-T J.83 annex A, or option 4b for 6 MHz, DVS-031, ITU-T J.83 annex B.

Modulation type	64/256 QAM, DVB-C, ITU-T J.83 annex A (option 4a) 64/256 QAM, DVS-031, ITU-T J.83 annex B (option 4b)
-----------------	-------------------------------------------------------------------------------------------------------

Channel bandwidth	8 MHz (option 4A); 6 MHz (option 4B)
-------------------	--------------------------------------

### Notes

- <sup>(1)</sup>Typical specifications  
<sup>(2)</sup>Relative to 25°C  
<sup>(3)</sup>At 25°C and +20 dBmV

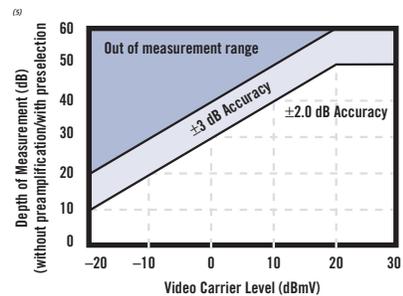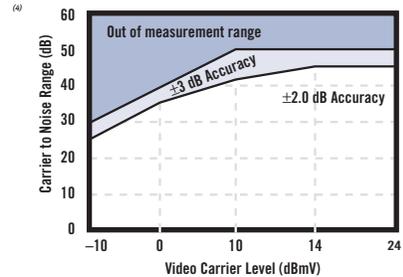

### Measurable input range (lock range)

64 QAM	-20 to +50 dBmV (typical)
256 QAM	-15 to +50 dBmV (typical)

### Frequency tuning


50 to 860 MHz (digital QAM mode)	
Resolution	50 kHz

### BER (bit error rate)

64 QAM pre-FEC/options 4A and 4B	$10^{-4}$ to $10^{-9}$
64 QAM post-FEC/options 4A and 4B	$10^{-4}$ to $10^{-9}$
256 QAM pre-FEC/option 4A and 4B	$10^{-4}$ to $10^{-9}$
256 QAM post-FEC/option 4A and 4B	$10^{-4}$ to $10^{-9}$

### MER (modulation error ratio)

64 QAM / option 4A	22 to 35 dB
Accuracy	$\pm 2.0$ dB
64 QAM / option 4B	21 to 35 dB
Accuracy	$\pm 1.5$ dB
256 QAM / option 4A	28 to 35 dB
Accuracy	$\pm 2.0$ dB
256 QAM / option 4B	28 to 35 dB
Accuracy	$\pm 1.5$ dB

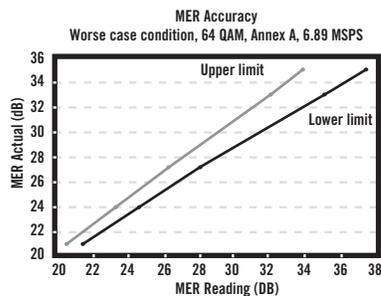

### EVM (error vector magnitude)

64 QAM/option 4A	1.2% to 5.2%
Accuracy	$\pm 0.5\%$ (1.2% to 2.0%) $\pm 1.0\%$ (2.1% to 4.0%) $\pm 1.4\%$ (4.1% to 5.2%)
64 QAM/option 4B	1.2% to 5.8%
Accuracy	$\pm 0.5\%$ (1.2% to 2.5%) $\pm 1.1\%$ (2.6% to 5.8%)
256 QAM/option 4A	1.1% to 2.5%
Accuracy	$\pm 0.6\%$
256 QAM/option 4B	1.1% to 2.5%
Accuracy	$\pm 0.5\%$

### QAM level measurement

Signal types	64 QAM, 256 QAM
Range	-20 to +45 dBmV
Accuracy	$\pm 1.0$ dB
Flatness	$\pm 0.5$ dB
Linearity	$\pm 1.0$ dB
Temperature	$\pm 0.5$ dB (typical)

### Measurable QAM ingress

64 QAM	-25 to -40 dBc
256 QAM	-30 to -40 dBc
Accuracy	$\pm 3.0$ dB

### Graphic display

Digital summary (including MER/EVM, pre/post FEC BER, equalizer stress, carrier offset, symbol rate) with limit/margin test results, QAM level. IQ constellation with zoom. Adaptive equalizer display (in accordance with the DVB ERT 290 standard), frequency response, group delay. ingress/noise under the carrier.

### Power source

Note: option powered from SDA Series nickel metal hydride battery. Operating time is specified for continuous use in QAM View mode. Option includes high-output charger.

Charge time	~4 hours
Operating time	2.5 hours continuous use (typical)
Universal AC charger/adaptor	
Input	100-250 VAC, 50 to 60 Hz, 0.5A
Output	charge 15V at 750 ma

### Physical

(total SDA-5000 size with option 4)	
Dimensions	6 x 10.5 x 4.25 in (15.2 x 26.7 x 10.8 cm)
Weight	approx 7.7 lb (3.5 kg)
Operating temperature range	-4 to 113°F (-20 to 45°C)

### Ordering information

#### Model SDA-5000

##### 1010-00-0473

Forward and reverse sweep field receiver with advanced signal analysis. Compatible with older Stealth units running Firmware version 9.3. Includes: extended-life nickel metal hydride battery, universal charger/AC adapter, and operator's manual

#### Model SDA-5500

##### 1010-00-0470

Headend sweep transceiver. Provides forward sweep and single user reverse sweep for SDA-5000. Compatible with older Stealth units running Firmware version 9.3. Includes: line cord, channel plan transfer cable, and operator's manual

#### Model SDA-5510

##### 1010-00-0472

Headend reverse sweep manager: receives reverse sweep from up to 10 SDA-5000 receivers with options 1 or 2 installed. Compatible with older Stealth units running Firmware version 9.3. includes: line cord, channel plan transfer cable, and operator's manual

### Options

#### 1019-00-1286

SDA-option 1: reverse sweep capability for model SDA-5000

#### 1019-00-1285

SDA-option 2: reverse sweep capability and 5 to 1000 MHz transmitter for model SDA-5000

#### 1019-00-1290

SDA-option 3a: PathTrak Field View interoperability for model SDA-5000 or SDA-5500 (PathTrak HCU)

#### 1019-00-1287

SDA-option 4a: 64/256 QAM, DVB-C, ITU-T J.83 annex A. QAM

View digital analysis including 64/256 constellation, MER, pre/post FEC BER, and exclusive QAM ingress under the carrier feature. Please specify option version 4a or 4b when ordering

#### 1019-00-1288

SDA-option 4b: 64/256 QAM, DVS-031, ITU-T J.83 annex B. QAM

View digital analysis including 64/256 constellation, MER, pre/post FEC BER, and exclusive QAM ingress under the carrier feature. Please specify option version 4a or 4b when ordering

#### 1019-00-0460

SDA-option 5: BNC connectors replace standard F type connectors

#### 1019-00-1295

SDA-option 6: portable reverse sweep Manager converts SDA-5000 to handheld version of the SDA-5510 (does not include forward sweep capability)

#### 1013-00-0004

SDA-PACK1: SDA-5000 with Option 2 (reverse sweep) and Option 3a (PathTrak Field View) factory fitted

#### 1010-00-0340

StealthWare: Windows-compatible data management software for all SDA, Stealth, MicroStealth, and CLI products

### Optional accessories

#### 1019-00-1298

SDA-CASE1: replacement soft carrying case for all SDA instruments without QAM View option installed. Compatible with standard and extended-life batteries

#### 1019-00-1369

SDA-QAM CASE: replacement soft carrying case for all SDA instruments with QAM View Option installed

#### 1019-00-1190

SDA-NIMH: spare extended-life battery

#### 1019-00-1195

SDA-NIMCA: universal charger/AC adapter for extended-life nickel metal hydride battery

#### 1012-00-0057

SDA-NIMK: extended-life battery kit. Includes extended-life battery, universal charger/AC adapter, and soft carrying case (SDA-CASE1) (For upgrading units without QAM View option)

#### 1019-00-1329

CBC-2: In-vehicle charger for SDA NiMH extended life battery only utilizing standard 12V DC automotive accessory port

Note: specifications, terms, and conditions are subject to change without notice.

**Acterna Advantage<sup>SM</sup> – adding value with global services and solutions**

From basic instrument support for your field technicians to management of complex, company-wide initiatives, Acterna’s service professionals are committed to helping you maximize your return on investment. Whatever your needs – product support, system management, education services, or business planning and consulting – we offer programs that will give you the competitive edge. This is the foundation of Acterna Advantage.

Acterna is the world’s largest provider of test and management solutions for optical transport, access and cable networks, and the second largest communications test company overall. Focused entirely on providing equipment, software, systems and services, Acterna helps customers develop, install, manufacture and maintain optical transport, access, cable, data/IP and wireless networks.

**Worldwide  
Headquarters**

12410 Milestone Center Dr.  
Germantown, Maryland  
20876-7100  
USA

Acterna is present in more than 80 countries. To find your local sales office go to: [www.acterna.com](http://www.acterna.com)

**Regional Sales  
Headquarters**

**North America**  
12410 Milestone Center Dr.  
Germantown, Maryland  
20876-7100  
USA  
Toll Free: 1 866 ACTERNA  
Toll Free: 1 866 228 3762  
Tel: +1301 353 1560x2850  
Fax: +1301 353 9216

**Latin America**  
Av. Eng. Luis Carlos Berrini  
936/8º e 9º andares  
04571-000 São Paulo  
SP-Brazil  
Tel: +55 11 5503 3800  
Fax: +55 11 5505 1598

**Asia Pacific**  
42 Clarendon Street  
PO Box 141  
South Melbourne  
Victoria 3205  
Australia  
Tel: +61 3 9690 6700  
Fax: +61 3 9690 6750

**Western Europe**  
Arbachtalstrasse 6  
72800 Eningen u.A.  
Germany  
Tel: +49 7121 86 2222  
Fax: +49 7121 86 1222

**Eastern Europe,  
Middle East & Africa**  
Elisabethstrasse 36  
2500 Baden  
Austria  
Tel: +43 2252 85 521 0  
Fax: +43 2252 80 727

1st Neopalimovskiy Per.  
15/7 (4th floor)  
RF 119121 Moscow  
Russia  
Tel: +7 095 248 2508  
Fax: +7 095 248 4189

© Copyright 2002  
Acterna, LLC.  
All rights reserved.

Acterna, The Keepers of Communications, and its logo are trademarks of Acterna, LLC. All other trademarks and registered trademarks are the property of their respective owners. Major Acterna operations sites are ISO 9001 registered.

Note: Specifications, terms and conditions are subject to change without notice.

