

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 21106-50-BP-25-BNC

Specifications:

Current rating: 25 amperes
Inductance: 50 μ H
Frequency range (recommended): 150 kHz – 30 MHz
Voltage (line to ground): 400 VDC, 270 V 50-60 Hz, 135 V 400 Hz
Power connections: $\frac{3}{4}$ " standard binding post
RF connector: Type BNC
Coupling capacitor: 0.10 μ F
Circuit: Single
Case size: 5.26" x 5.29" x 10.00" (13.36 cm x 13.44 cm x 25.40 cm)
Overall length with base plate: 12.00" (30.48 cm)

Remarks: Designed to meet the requirements of CISPR 16-1-2 Ed. 1.2. Specifications subject to change without notice.

Rev. September 3, 2016

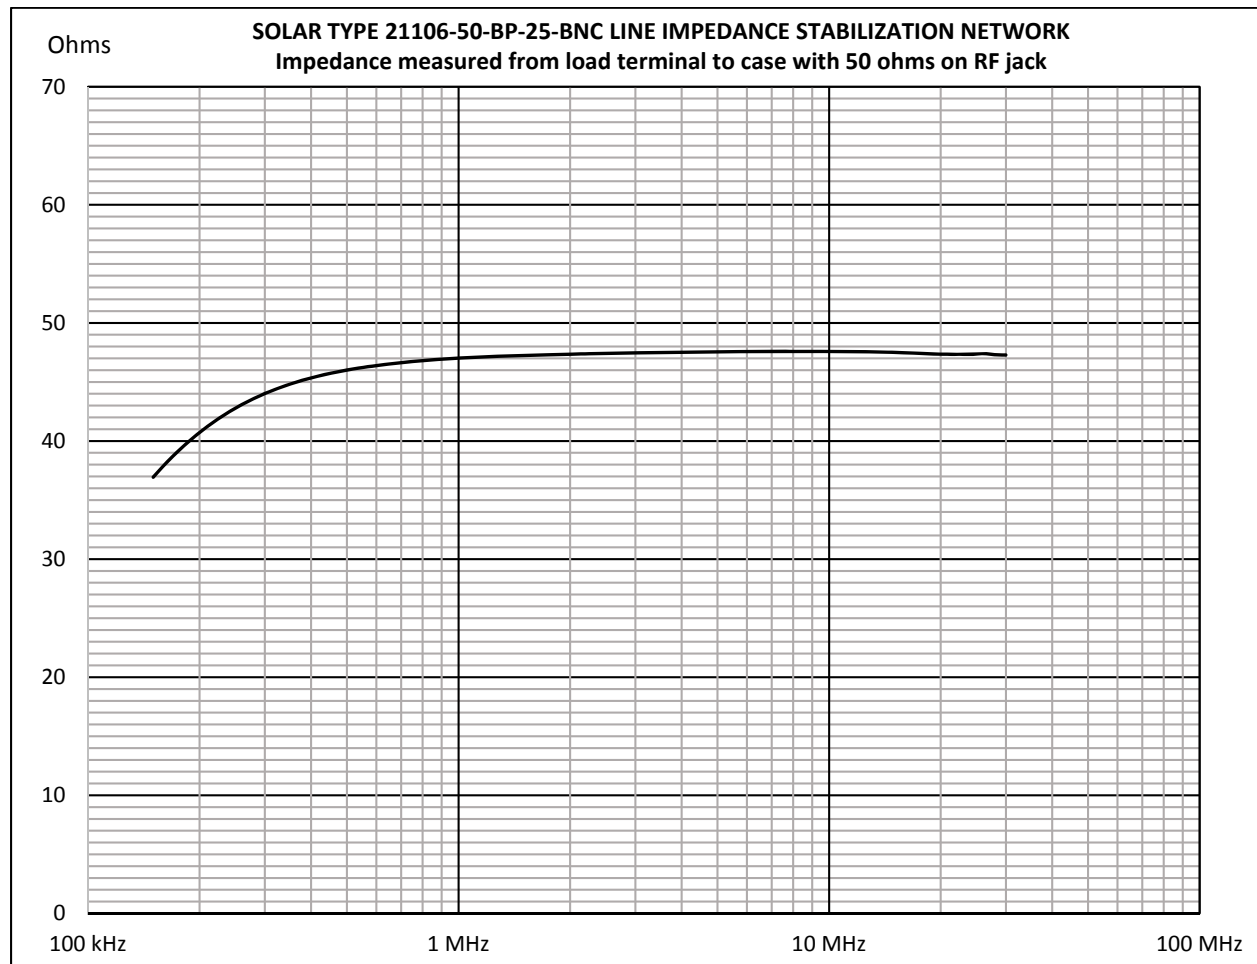

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com