

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 21407-5-TS-50-N

Specifications:

Current rating: 50 amperes
 Inductance: 5 μ H
 Frequency range (recommended): 100 kHz - 100 MHz
 Voltage (line to ground):.....600 VDC, 500 V 50 - 60 Hz, 240 V 400 Hz
 Power connections:..... TS 1/4-20 threaded stud
 RF connector: Type N (2)
 Coupling capacitor:0.10 μ F
 Circuit: Single
 Case size: 10.29" x 9.25" x 13.00" (26.14 cm x 23.50 cm x 33.02 cm)
 Overall length with base plate: 17.00" (43.18 cm)

Remarks: Designed for CISPR 25. Specifications subject to change without notice.

Rev. September 3, 2016

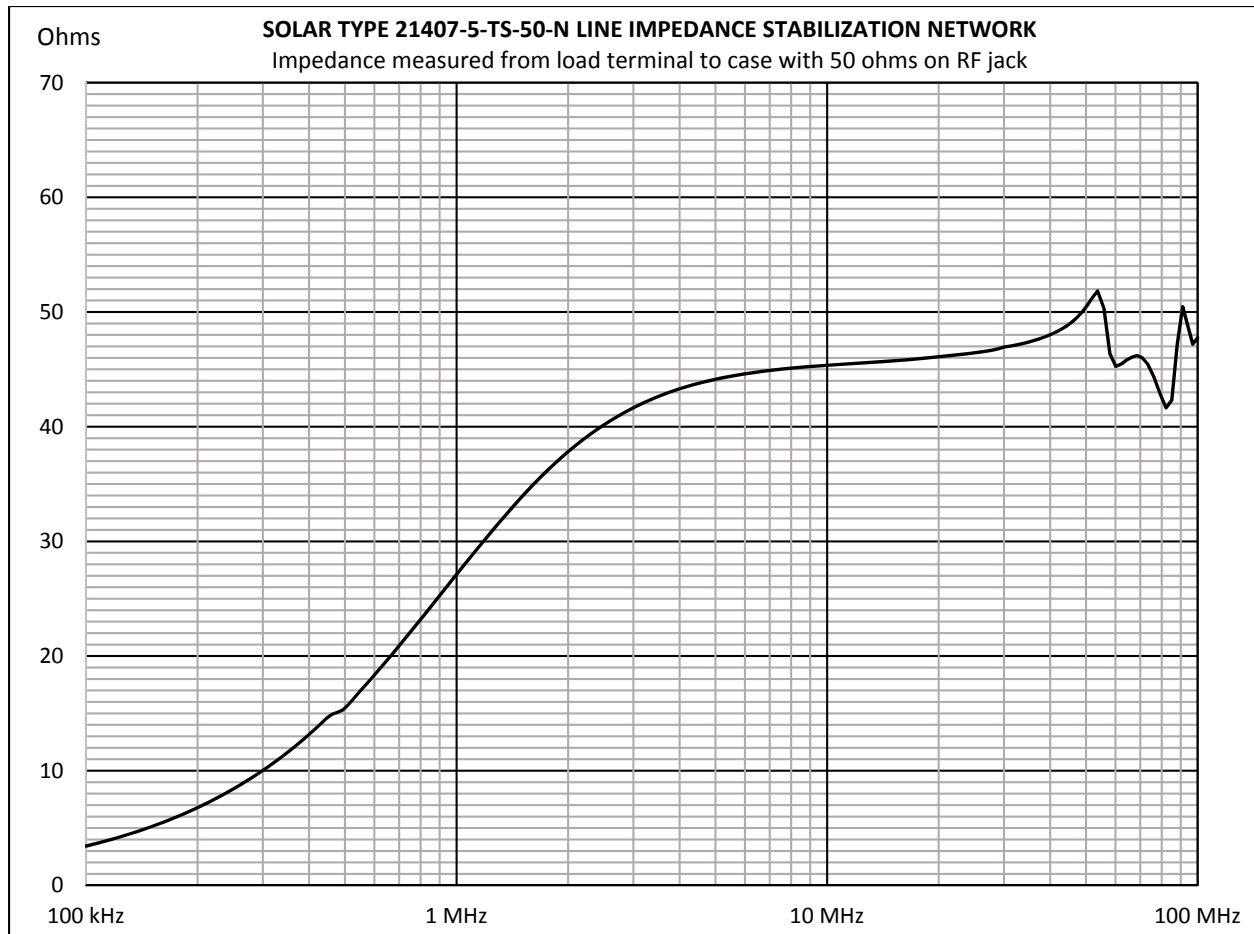

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com