

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 2203-5-TS-25-N

Specifications:

Current rating: 25 amperes
 Inductance: 5 μ H
 Frequency range (recommended): 1 kHz – 1 GHz
 Voltage (line to ground):..... 600 VDC, 500 V 50-60 Hz, 240 V 400 Hz, 125 V 800 Hz
 Power connections:..... TS, 1/4-20 threaded stud
 RF connector: Type N
 Coupling capacitor: 0.10 μ F
 Circuit: Single
 Case size: 5.26" x 5.29" x 10.00" (13.36 cm x 13.44 cm x 25.40 cm)
 Overall length with base plate: 12.00" (30.48 cm)

Remarks: Designed for FCC Part 18, CISPR 25, DO-160G (when used with external 10 μ F capacitor), and DEF STD 59-411 Part 3. Specifications subject to change without notice.

Rev. September 3, 2016

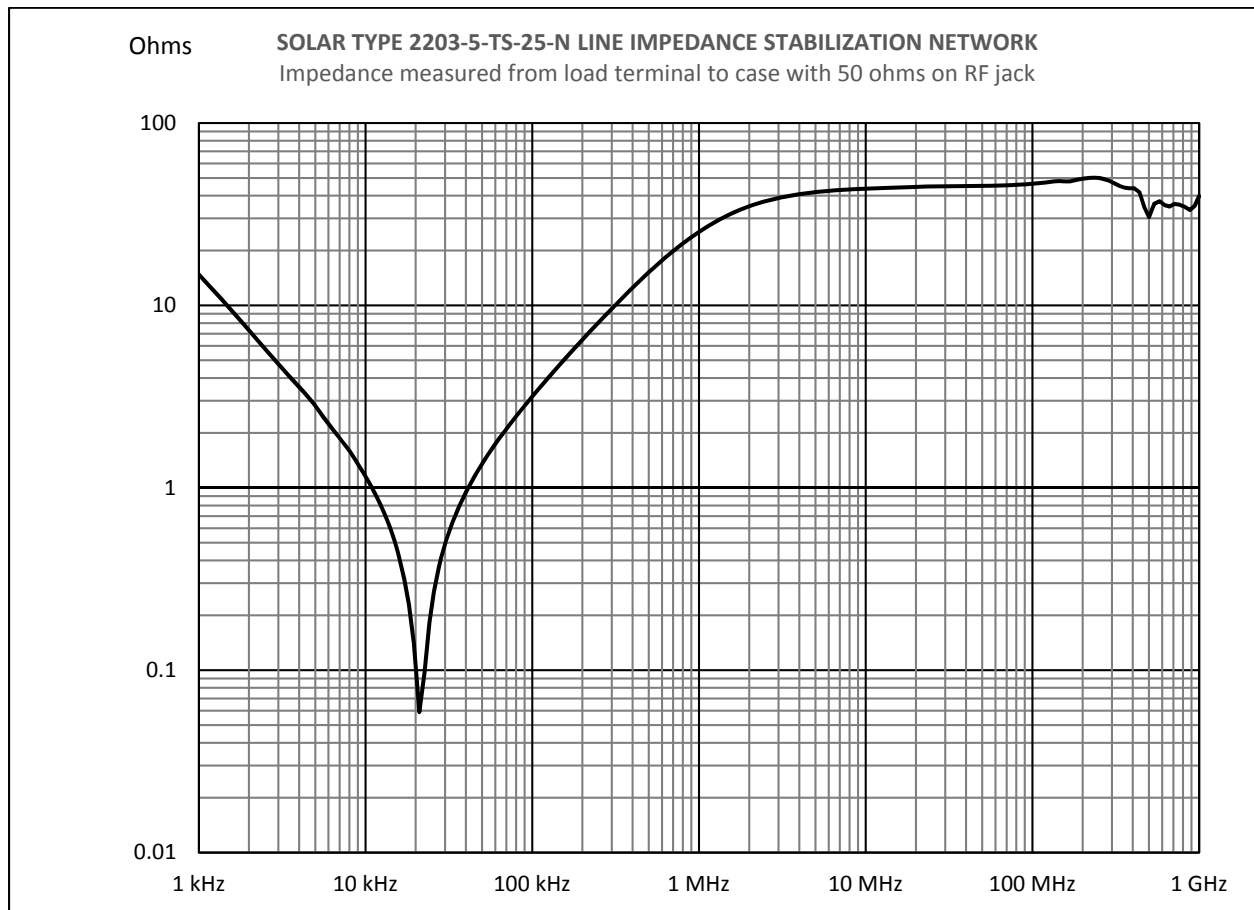

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com