

Agilent MXA Signal Analyzer N9020A

Data Sheet


Available frequency ranges

N9020A-503 20 Hz to 3.6 GHz

N9020A-508 20 Hz to 8.4 GHz

N9020A-513 20 Hz to 13.6 GHz

N9020A-526 20 Hz to 26.5 GHz

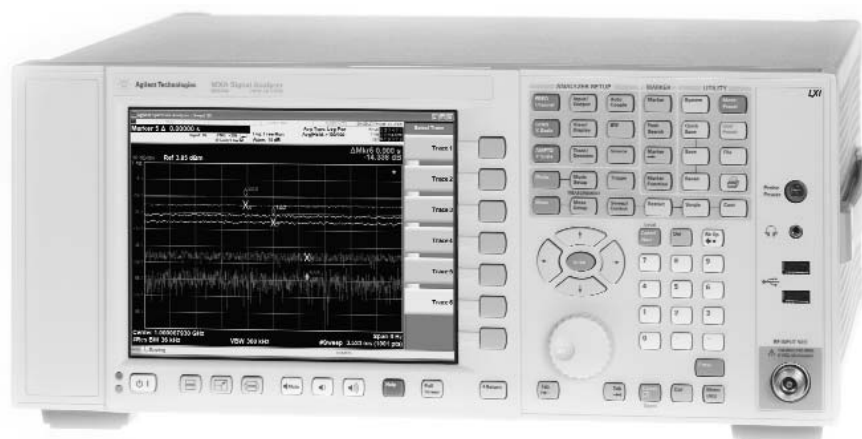

Fully LXI class C compliant

The MXA signal analyzer takes signal and spectrum analysis to the next generation, offering the highest performance in a midrange signal analyzer with the industry's fastest signal and spectrum analysis, eliminating the compromise between speed and performance. With a broad set of applications and demodulation

capabilities, an intuitive user interface, outstanding connectivity and powerful one-button measurements, the MXA is ideal for both R&D and manufacturing engineers working on cellular, emerging wireless communications, general purpose, aerospace and defense applications.



Agilent Technologies

Table of Contents

Definitions and Conditions 3

Frequency and Time Specifications . . 4

Frequency range	4
Band	4
Frequency reference	4
Frequency readout accuracy	4
Marker frequency counter	4
Frequency span	5
Sweep time and triggering	5
Sweep (trace) point range	5
Resolution bandwidth (RBW)	5
Analysis bandwidth	6
Video bandwidth (VBW)	6
Measurement speed	6

Amplitude Accuracy and Range

Specifications 7

Amplitude range	7
Maximum safe input level	7
Display range	7
Frequency response	8
Input attenuation switching uncertainty	8
Total absolute amplitude accuracy	8
Input voltage standing wave ratio (VSWR)	8
Resolution bandwidth switching uncertainty	9
Reference level	9
Display scale switching uncertainty	9
Display scale fidelity	9
Trace detectors	9
Preamplifier	9

Dynamic Range Specifications 10

1 dB gain compression (two tone)	10
Displayed average noise level (DANL)	10
Spurious responses	10
Second harmonic distortion (SHI)	11
Third-order intermodulation distortion (TOI)	11
Phase noise	12

Power Suite Measurement

Specifications 13

Channel power	13
Occupied bandwidth	13
Adjacent channel power	13
Power statistics CCDF	13
Burst power	14
Spurious emission	14
Spectrum emission mask (SEM)	14

General Specifications 15

Temperature range	15
EMC	15
Safety	15
Audio noise	15
Environmental stress	15
Power requirements	15
Data storage	15
Weight	15
Dimensions	15
Warranty	15
Calibration cycle	15

Input and Outputs 17

Front panel	17
Rear panel	17

MXA Signal Analyzer Ordering

Information 19

Hardware	19
Applications	19
Accessories	19
Warranty and service	19
Calibration	19

Related Literature 20

Support, Services, and Assistance . . 21

Definitions and Conditions

Specifications describe the performance of parameters covered by the product warranty and apply over 5 to 50 °C unless otherwise noted. 95th percentile values indicate the breadth of the population ($\approx 2\sigma$) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed. Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty. Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but is not covered

by the product warranty. The analyzer will meet its specifications when:

- The analyzer is within its calibration cycle.
- Under auto couple control, except that Auto Sweep Time Rules = Accy.
- For signal frequencies <20 MHz, DC coupling applied.
- The analyzer has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on, if it had previously been stored at a temperature range inside the allowed storage range but outside the allowed operating range.
- The analyzer has been turned on at least 30 minutes with Auto Align set to normal, or if Auto Align is set to off or partial, alignments must have been run recently enough to prevent an Alert message. If the Alert condition is changed from Time and Temperature to one of the disabled duration choices, the analyzer may fail to meet specifications without informing the user.

This MXA signal analyzer data sheet is a summary of the complete specifications and conditions, which are available in the *MXA Signal Analyzer Specification Guide*. The *MXA Signal Analyzer Specification Guide* can be obtained on the web at: www.agilent.com/find/mxa. Then follow this selection process:

- Select **Technical Support** under **Key Library Information**
- Select **Manuals and Guides**
- Download specifications guide

Frequency and Time Specifications

Frequency range	DC Coupled	AC Coupled
Option 503	20 Hz to 3.6 GHz	10 MHz to 3.6 GHz
Option 508	20 Hz to 8.4 GHz	10 MHz to 8.4 GHz
Option 513	20 Hz to 13.6 GHz	10 MHz to 13.6 GHz
Option 526	20 Hz to 26.5 GHz	10 MHz to 26.5 GHz

Band	LO Multiple (N)	
0	1	20 Hz to 3.6 GHz
1	1	3.5 to 8.4 GHz
2	2	8.3 to 13.6 GHz
3	4	13.5 to 17.1 GHz
4	4	17 to 26.5 GHz

Frequency reference

Accuracy	\pm [(time since last adjustment x aging rate) + temperature stability + calibration accuracy]	
Aging rate	Option PFR $\pm 1 \times 10^{-7}$ / year $\pm 1.5 \times 10^{-7}$ / 2 years	Standard $\pm 1 \times 10^{-6}$ / year
Temperature stability 20 to 30 °C 5 to 50 °C	Option PFR $\pm 1.5 \times 10^{-8}$ $\pm 5 \times 10^{-8}$	Standard $\pm 2 \times 10^{-6}$ $\pm 2 \times 10^{-6}$
Achievable initial calibration accuracy	Option PFR $\pm 4 \times 10^{-8}$	Standard $\pm 1.4 \times 10^{-6}$
Example frequency reference accuracy (with Option PFR) 1 year after last adjustment	$= \pm(1 \times 10^{-7} + 5 \times 10^{-8} + 4 \times 10^{-8})$ $= \pm 1.9 \times 10^{-7}$	
Residual FM Option PFR Standard	$\leq (0.25 \text{ Hz} \times N)$ p-p in 20 ms nominal $\leq (10 \text{ Hz} \times N)$ p-p in 20 ms nominal See frequency range for N (harmonic number)	

Frequency readout accuracy (*start, stop, center, marker*)

$$\pm (\text{marker frequency} \times \text{frequency reference accuracy} + 0.25\% \times \text{span} + 5\% \times \text{RBW} + 2 \text{ Hz} + 0.5 \times \text{horizontal resolution}^1)$$

¹ Horizontal resolution is span/(sweep points – 1)

Marker frequency counter

Accuracy	\pm (marker frequency x frequency reference accuracy + 0.100 Hz)
Delta counter accuracy	\pm (delta frequency x frequency reference accuracy + 0.141 Hz)
Counter resolution	0.001 Hz

Frequency and Time Specifications (continued)

Frequency span (FFT and swept mode)

Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument
Resolution	2 Hz
Accuracy	$\pm [0.2\% \times \text{span} + \text{horizontal resolution}]$

Sweep time and triggering

Range	Span = 0 Hz	1 μ s to 6000 s
	Span \geq 10 Hz	1 ms to 4000 s
Accuracy	Span \geq 10 Hz, swept	$\pm 0.01\%$ nominal
	Span \geq 10 Hz, FFT	$\pm 40\%$ nominal
	Span = 0 Hz	$\pm 0.01\%$ nominal
Trigger	Free run, line, video, External 1, External 2	
Trigger delay	Span = 0 Hz or FFT	-150 to +500 ms
	Span \geq 10 Hz, swept	1 μ s to 500 ms
	Resolution	0.1 μ s

Sweep (trace) point range

All spans	1 to 20001
-----------	------------

Resolution bandwidth (RBW)

Range (-3.01 dB bandwidth)	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz	
Bandwidth accuracy (power)	1 Hz to 240 kHz	$\pm 2.0\%$ (± 0.09 dB)
RBW range	270 kHz to 1.1 MHz (< 3.6 GHz CF)	$\pm 2.0\%$ (± 0.09 dB)
	1.2 to 2.0 MHz (< 3.6 GHz CF)	± 0.07 dB nominal
	2.2 to 6 MHz (< 3.6 GHz CF)	± 0.2 dB nominal
Bandwidth accuracy (-3.01 dB)	1 Hz to 1.3 MHz	$\pm 2\%$ nominal
RBW range		
Selectivity (-60 dB/-3 dB)	4.1:1 nominal	

Frequency and Time Specifications (continued)

Analysis bandwidth²

Maximum bandwidth

Option B25	25 MHz
Standard	10 MHz

² Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain.

Video bandwidth (VBW)

Range	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz and wide open (labeled 50 MHz)
Accuracy	±6% nominal

Measurement speed

Local measurement and display update rate	Sweep points = 1001	≤ 11 ms (≥ 90/s) nominal
Remote measurement and LAN transfer rate	Sweep points = 1001	≤ 4 ms (≥ 250/s) nominal
Marker peak search	≤ 5 ms	
Center frequency tune and transfer (RF)	≤ 51 ms	
Center frequency tune and transfer (μW)	≤ 86 ms	
Measurement/mode switching	≤ 75 ms	

Amplitude Accuracy and Range Specifications

Amplitude range

Measurement range	Displayed average noise level (DANL) to maximum safe input level
Input attenuator range (20 Hz to 26.5 GHz)	0 to 70 dB in 2 dB steps

Maximum safe input level

Average total power	+30 dBm (1 W)	
Preamp (Option P03, P08, P13, P26)	+25 dBm	
Peak pulse power	<10 μ s pulse width, <1% duty cycle and input attenuation \geq 30 dB	+50 dBm (100 W)
DC volts		
DC coupled	\pm 0.2 Vdc	
AC coupled	\pm 70 Vdc	

Display range

Log scale	0.1 to 1 dB/division in 0.1 dB steps 1 to 20 dB/division in 1 dB steps (10 display divisions)
Linear scale	10 divisions
Scale units	dBm, dBmV, dB μ V, dBmA, dB μ A, V, W, A

Amplitude Accuracy and Range Specifications (continued)

Frequency response (10 dB input attenuation, 20 to 30 °C, preselector centering applied, σ = nominal standard deviation)

		Specification	95 th Percentile ($\approx 2\sigma$)
	20 Hz to 3.6 GHz	± 0.45 dB	± 0.10 dB
	3.5 to 8.4 GHz	± 1.50 dB	± 0.7 dB
	8.3 to 13.6 GHz	± 2.00 dB	± 0.8 dB
	13.5 to 22.0 GHz	± 2.00 dB	± 0.8 dB
	22.0 to 26.5 GHz	± 2.50 dB	± 1.1 dB
Frequency response at attenuation 20, 30, 40 dB	20 Hz to 3.6 GHz		± 0.11 dB
Preamp on (Option P03, P08, P13, P26) attenuation 0 dB	100 kHz to 3.6 GHz	± 0.70 dB	± 0.3 dB
	3.5 to 8.4 GHz	± 2.20 dB	± 0.6 dB
	8.3 to 13.6 GHz	± 2.60 dB	± 1.0 dB
	13.5 to 17.1 GHz	± 3.00 dB	± 0.9 dB
	17.0 to 22.0 GHz	± 3.10 dB	± 0.9 dB
	22.0 to 26.5 GHz	± 4.00 dB	± 1.3 dB

Input attenuation switching uncertainty (Attenuator setting > 2 dB)

	At 50 MHz	± 0.20 dB	± 0.08 dB typical
	20 Hz to 3.6 GHz		± 0.3 dB nominal
	3.5 to 8.4 GHz		± 0.5 dB nominal
	8.3 to 13.6 GHz		± 0.7 dB nominal
	13.5 to 26.5 GHz		± 0.7 dB nominal

Total absolute amplitude accuracy (10 dB attenuation, 20 to 30 °C, $1 \text{ Hz} \leq \text{RBW} \leq 1 \text{ MHz}$, input signal -10 to -50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, σ = nominal standard deviation)

	At 50 MHz	± 0.28 dB	
	At all frequencies	$\pm (0.28 \text{ dB} + \text{frequency response})$	
	20 Hz to 3.6 GHz (95% confidence $\approx 2\sigma$)	± 0.30 dB	
Preamp on (Option P03, P08, P13, P26)	At all frequencies	$\pm (0.36 \text{ dB} + \text{frequency response})$	

Input voltage standing wave ratio (VSWR) (≥ 8 dB input attenuation)

	50 MHz to 3.6 GHz	$< 1.2:1$ nominal	
	3.6 to 8.4 GHz	$< 1.6:1$ nominal	
	8.4 to 13.6 GHz	$< 1.6:1$ nominal	
	13.6 to 26.5 GHz	$< 1.9:1$ nominal	
Preamp on (Option P03, P08, P13, P26) (≥ 2 dB attenuation)	50 MHz to 3.6 GHz	$< 1.2:1$ nominal	

Amplitude Accuracy and Range Specifications (continued)

Resolution bandwidth switching uncertainty (referenced to 30 kHz RBW)

1 Hz to 1.5 MHz RBW	±0.05 dB
1.6 MHz to 3 MHz RBW	±0.10 dB
4, 5, 6, 8 MHz RBW	±1.0 dB

Reference level

Range	
Log scale	–170 to +30 dBm in 0.01 dB steps
Linear scale	Same as Log (707 pV to 7.07 V)
Accuracy	0 dB

Display scale switching uncertainty

Switching between linear and log	0 dB
Log scale/div switching	0 dB

Display scale fidelity

Between –10 dBm and –80 dBm input mixer level	±0.10 dB total
---	----------------

Trace detectors

Normal, peak, sample, negative peak, log power average, RMS average, and voltage average

Preamplifier

Frequency range	Option P03	100 kHz to 3.6 GHz
	Option P08	100 kHz to 8.4 GHz
	Option P13	100 kHz to 13.6 GHz
	Option P26	100 kHz to 26.5 GHz
Gain	100 kHz to 3.6 GHz	+20 dB nominal
	3.6 to 26.5 GHz	+35 dB nominal
Noise figure	100 kHz to 3.6 GHz	11 dB nominal
	3.6 to 8.4 GHz	9 dB nominal
	8.4 to 13.6 GHz	10 dB nominal
	13.6 to 26.5 GHz	15 dB nominal

Dynamic Range Specifications

1 dB gain compression (two-tone)

		Total power at input mixer	
		20 to 500 MHz	0 dBm +3 dBm typical
		500 MHz to 3.6 GHz	+3 dBm +7 dBm typical
		3.6 to 26.5 GHz	0 dBm +4 dBm typical
Preamp on (Option P03, P08, P13, P26)	10 MHz to 3.6 GHz	-20 dBm nominal	
	3.6 to 26.5 GHz		
	Tone spacing 100 kHz to 20 MHz	-26 dBm nominal	
	Tone spacing >70 MHz	-16 dBm nominal	

Displayed average noise level (DANL)

(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30 °C)

		Specification	Typical
Preamp off	9 kHz to 1 MHz		-125 dBm
	1 to 10 MHz	-150 dBm	-153 dBm
	10 MHz to 2.1 GHz	-151 dBm	-154 dBm
	2.1 to 3.6 GHz	-149 dBm	-152 dBm
	3.6 to 8.4 GHz	-149 dBm	-153 dBm
	8.4 to 13.6 GHz	-147 dBm	-150 dBm
	13.6 to 17.1 GHz	-143 dBm	-147 dBm
	17.1 to 22.0 GHz	-142 dBm	-145 dBm
Preamp on (Option P03, P08, P13, P26)	22.0 to 26.5 GHz	-135 dBm	-141 dBm
	100 kHz to 1 MHz		-147 dBm
	1 to 10 MHz	-161 dBm	-163 dBm
	10 MHz to 2.1 GHz	-163 dBm	-166 dBm
	2.1 to 3.6 GHz	-160 dBm	-164 dBm
	3.6 to 8.4 GHz	-160 dBm	-164 dBm
	8.4 to 13.6 GHz	-160 dBm	-164 dBm
	13.6 to 17.1 GHz	-158 dBm	-163 dBm
17.1 to 22.0 GHz	-155 dBm	-160 dBm	
22.0 to 26.5 GHz	-148 dBm	-155 dBm	

Spurious responses

Residual responses (Input terminated and 0 dB attenuation)	200 kHz to 8.4 GHz	-100 dBm
	8.4 to 26.5 GHz	-100 dBm nominal
Image responses	10 MHz to 3.6 GHz	-80 dBc (-100 typical)
	3.6 to 13.6 GHz	-78 dBc (-90 typical)
	13.6 to 17.1 GHz	-74 dBc (-86 typical)
	17.1 to 22 GHz	-70 dBc (-82 typical)
	22 to 26.5 GHz	-68 dBc (-80 typical)
LO related spurious (f > 600 MHz from carrier)	10 MHz to 3.6 GHz	-70 dBc typical
Other spurious	100 Hz ≤ f < 10 MHz from carrier	-70 dBc
	f ≥ 10 MHz from carrier	-80 dBc

Dynamic Range Specifications (continued)

Second harmonic distortion (SHI)

		Mixer level	Distortion	SHI
	10 MHz to 1.8 GHz	-15 dBm	-60 dBc	+45 dBm
	1.8 to 7.0 GHz	-15 dBm	-80 dBc	+65 dBm
	7.0 to 11.0 GHz	-15 dBm	-70 dBc	+55 dBm
	11.0 to 13.25 GHz	-15 dBm	-65 dBc	+50 dBm
Preamp on (Option P03, P08, P13, P26)		Preamp level	Distortion	SHI
	10 MHz to 1.8 GHz	-45 dBm	-75 dBc nominal	+30 dBm nominal
	1.8 to 13.25 GHz	-50 dBm	-60 dBc nominal	+10 dBm

Third-order intermodulation distortion (TOI) (two -30 dBm tones at input mixer with tone separation > 15 kHz, 20 to 30 °C)

		Distortion	TOI	Typical
	10 to 100 MHz	-84 dBc	+12 dBm	+17 dBm
	100 to 400 MHz	-88 dBc	+14 dBm	+18 dBm
	400 MHz to 1.7 GHz	-90 dBc	+15 dBm	+19 dBm
	1.7 to 3.6 GHz	-92 dBc	+16 dBm	+19 dBm
	3.6 to 8.4 GHz	-90 dBc	+15 dBm	+18 dBm
	8.4 to 13.6 GHz	-90 dBc	+15 dBm	+18 dBm
	13.6 to 26.5 GHz	-80 dBc	+10 dBm	+14 dBm
Preamp on (Option P03, P08, P13, P26)	10 MHz to 3.6 GHz	20 dB lower than non-preamp mode, nominal		
(two -45 dBm tones at preamp input)	3.6 to 26.5 GHz	35 dB lower than non-preamp mode, nominal, for offset <10 MHz		
	3.6 to 26.5 GHz	-14 dB, nominal, for offset >20 MHz		

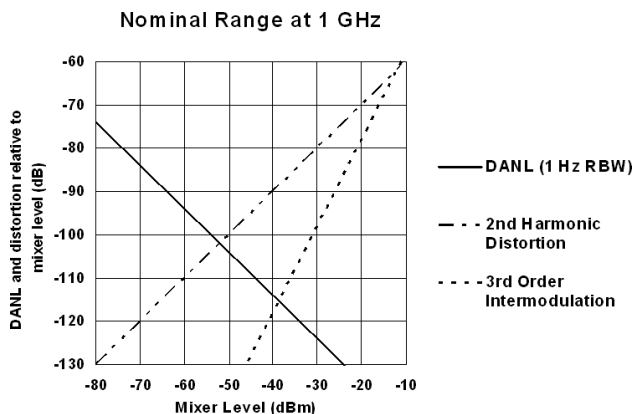


Figure 1. Nominal dynamic range – Band 0, for second and third order distortion, 20 Hz to 3.6 GHz

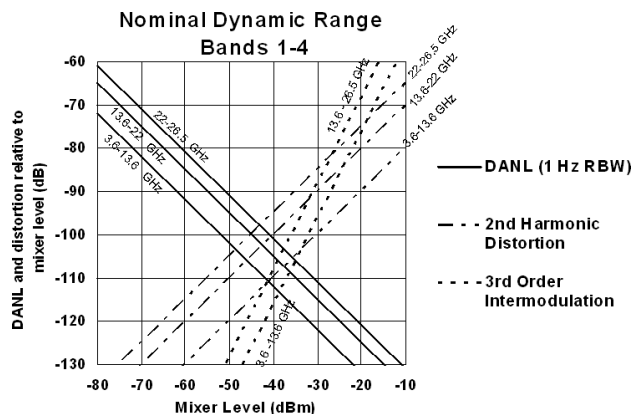


Figure 2. Nominal dynamic range – Bands 1 to 4, second and third order distortion, 3.6 GHz to 26.5 GHz

Dynamic Range Specifications (continued)

Phase noise³

Noise sidebands (20 to 30 °C, CF = 1 GHz)	Offset	Specification	Typical
	100 Hz	-80 dBc/Hz	-86 dBc/Hz
	1 kHz		-100 dBc/Hz nominal
	10 kHz	-103 dBc/Hz	-106 dBc/Hz
	100 kHz	-115 dBc/Hz	-117 dBc/Hz
	1 MHz	-134 dBc/Hz	-136 dBc/Hz
	10 MHz		-147 dBc/Hz nominal

3 For nominal values, refer to Figure 3.

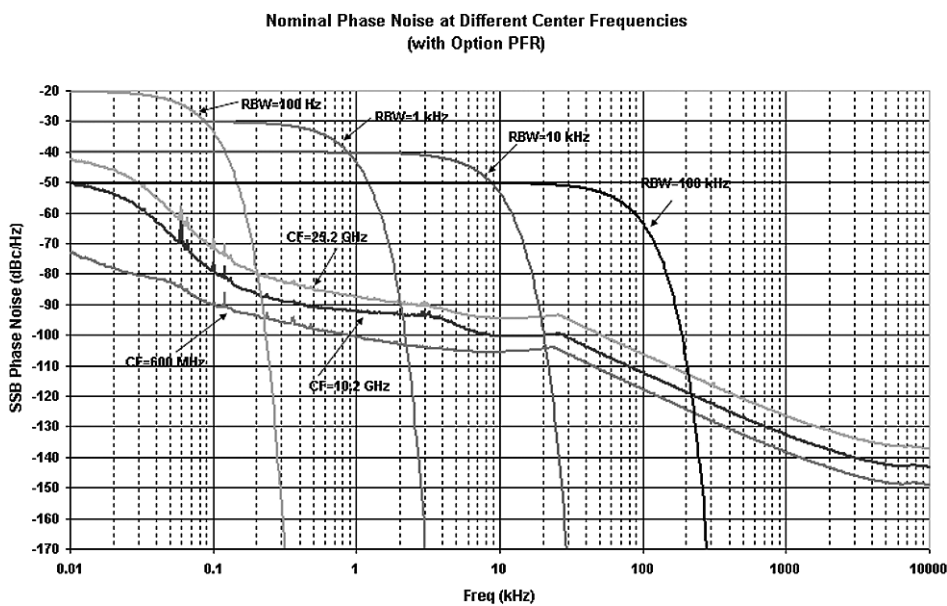


Figure 3. Nominal phase noise at different center frequencies (with Option PFR)

Power Suite Measurement Specifications

Channel power

Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, mixer level < -20 dBm)	±0.72 dB (±0.22 dB typical)
---	-----------------------------

Occupied bandwidth

Frequency accuracy	± [span/500] nominal
--------------------	----------------------

Adjacent channel power

Accuracy, W-CDMA (ACLR) (at specific mixer levels and ACLR ranges)	Adjacent	Alternate
MS	±0.15 dB	±0.19 dB
BTS	±0.25 dB	±0.25 dB
Dynamic range (typical)		
Without noise correction	-73 dB	-79 dB
With noise correction	-78 dB	-82 dB
Offset channel pairs measured	1 to 6	
ACP speed (fast method). Data measurement and transfer time	14 ms nominal ($\sigma = 0.2$ dB)	

ACPR dynamic range, W-CDMA (5 MHz
offset, RRC weighted, 3.84 MHz noise
bandwidth)

Two carriers	-70 dB nominal
Four carriers	-66 dB nominal
With noise correction	-76 dB nominal

ACPR accuracy (two carriers, 5 MHz
offset, -48 dBc ACPR)

±0.42 dB nominal

Multiple number of carriers measured

Up to 12

Power statistics CCDF

Histogram resolution	0.01 dB
----------------------	---------

Power Suite Measurement Specifications (continued)

Burst power

Methods	Power above threshold, power within burst width
Results	Single burst output power, average output power, maximum power, minimum power within burst, burst width

Spurious emission

W-CDMA (1980 MHz region, 1.2 MHz RBW)

Table driven spurious signals; search across regions.

Relative dynamic range	79.2 dB (80.8 dB typical)
Absolute sensitivity	-85.7 dBm (-87.7 dBm typical)

Spectrum emission mask (SEM)

cdma2000 (750 kHz offset)

Relative dynamic range (30 kHz RBW)	83.7 dB (86.7 dB typical)
Absolute sensitivity	-101.7 dBm (-103 dBm typical)
Relative accuracy	±0.16 dB

3GPP W-CDMA (2.515 MHz offset)

Relative dynamic range (30 kHz RBW)	86.7 dB (89.2 dB typical)
Absolute sensitivity	-101.7 dBm (-103 dBm typical)
Relative accuracy	±0.17 dB

General Specifications

Temperature range

Operating	5 to +50 °C
Storage	-40 to +65 °C

EMC

Complies with European EMC Directive 89/336/EEC, amended by 93/68/EEC

- IEC/EN 61326
 - CISPR Pub 11 Group 1, class A
 - AS/NZS CISPR 11:2002
 - ICES/NMB-001
-

Safety

Complies with European Low Voltage Directive 73/23/EEC, amended by 93/68/EEC

- IEC/EN 61010-1
 - Canada: CSA C22.2 No. 61010-1
 - USA: UL 61010-1
-

Audio noise

Acoustic noise emission	Geraeuschemission
LpA <70 dB	LpA <70 dB
Operator position	Am Arbeitsplatz
Normal position	Normaler Betrieb
Per ISO 7779	Nach DIN 45635 t.19

Environmental stress

Samples of this product have been type tested in accordance with the Agilent Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation and end-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power line conditions. Test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3.

General Specifications (continued)

Power requirements

Voltage and frequency (nominal)	100/120 V, 50/60 Hz 220/240 V, 50/60 Hz
---------------------------------	--

Power consumption

On	< 260 watts, no options, < 450 watts, all options
Standby	< 20 watts

Data storage

Internal	40 GB nominal
----------	---------------

External	Supports USB 2.0 compatible memory devices
----------	--

Weight (without options)

Net	16 kg (35 lbs) nominal
Shipping	28 kg (62 lbs) nominal

Dimensions

Height	177 mm (7.0 in)
--------	-----------------

Width	426 mm (16.8 in)
-------	------------------

Length	368 mm (14.5 in)
--------	------------------

Warranty

The MXA signal analyzer is supplied with a one-year warranty.

Calibration cycle

The recommended calibration cycle is one year. Calibration services are available through Agilent service centers.

Input and Outputs

Front panel

RF input	
Connector	Type-N female, 50 Ω nominal
Probe power	
Voltage/current (nominal)	+15 Vdc, $\pm 7\%$ at 150 mA max nominal -12.6 Vdc, $\pm 10\%$ at 150 mA max nominal
USB 2.0 ports	
Master (2 ports)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	0.5 A nominal

Rear panel

10 MHz out	
Connector	BNC female, 50 Ω nominal
Output amplitude	≥ 0 dBm nominal
Frequency	10 MHz \pm (10 MHz x frequency reference accuracy)
Ext Ref In	
Connector	BNC female, 50 Ω nominal
Input amplitude range	-5 to +10 dBm nominal
Input frequency	1 to 50 MHz nominal
Frequency lock range	$\pm 5 \times 10^{-6}$ of specified external reference input frequency
Trigger 1 and trigger 2 inputs	
Connector	BNC female
External trigger input	
Impedance	> 10 k Ω nominal
Trigger level range	-5 to +5 V
Trigger 1 and trigger 2 outputs	
Connector	BNC female
Impedance	50 Ω nominal
Level	5 V TTL

Input and Outputs (continued)

Rear panel (continued)

Sync (reserved for future use)	
Connector	BNC female

Monitor output	
Connector	VGA compatible, 15-pin mini D-SUB
Format	XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB
Resolution	1024 x 768

Noise source drive +28 V (pulsed) (reserved for future use)	
Connector	BNC female

SNS series noise source (reserved for future use)	
---	--

Digital bus (reserved for future use)	
Connector	MDR-80

Aux out (reserved for future use)	
Connector	BNC female

USB 2.0 ports	
Master (4 ports)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	0.5 A nominal
Slave (1 port)	
Standard	Compatible with USB 2.0
Connector	USB Type-B female
Output current	0.5 A nominal

GPIB interface	
Connector	IEEE-488 bus connector
GPIB codes	SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0

LAN TCP/IP interface	
Standard	100BaseT
Connector	RJ45 Ethertwist

MXA Signal Analyzer Ordering Information

For further information, refer to MXA Signal Analyzer Configuration Guide (5989-4943EN)

Hardware

N9020A	MXA signal analyzer
N9020A-503	Frequency range, 20 Hz to 3.6 GHz
N9020A-508	Frequency range, 20 Hz to 8.4 GHz
N9020A-513	Frequency range, 20 Hz to 13.6 GHz
N9020A-526	Frequency range, 20 Hz to 26.5 GHz
N9020A-B25	Analysis bandwidth, 25 MHz
N9020A-PFR	Precision frequency reference
N9020A-EA3	Electronic attenuator, 3.6 GHz
N9020A-P03	Preamplifier, 3.6 GHz
N9020A-P08	Preamplifier, 8.4 GHz
N9020A-P13	Preamplifier, 13.6 GHz
N9020A-P26	Preamplifier, 26.5 GHz

Applications

N9068A	Phase noise measurement application (available on December 1, 2006)
N9073A-1FP	W-CDMA measurement application
N9073A-2FP	HSDPA/HSUPA measurement application
N9075A	802.16 OFDMA measurement application
89601A	Vector signal analysis software

Accessories

N9020A-MSE	Mouse
N9020A-KYB	Keyboard
N9020A-EFM	USB flash drive, 512 MB
N9020A-DVR	USB DVD-ROM drive
N9020A-MLP	Minimum loss pad, 50 to 75 Ω
N9020A-PRC	Portable configuration
N9020A-CVR	Front panel cover
N9020A-1CP	Rack mount and handle kit
N9020A-1CM	Rack mount kit
N9020A-1CN	Front handle kit
N9020A-1CR	Rack slide kit
N9020A-HTC	Hard transit case

Warranty and service

Standard warranty is one year.	
R-51B-001-3C	1 year return-to-Agilent warranty extended to 3 years

Calibration⁴

R-50C-011-3	Inclusive calibration plan, 3 year coverage
R-50C-013-3	Inclusive calibration plan and cal data, 3 year coverage

⁴ Options not available in all countries

Related Literature

Publication Title	Publication Type	Publication Number
MXA Signal Analyzer in general		
<i>Agilent MXA Signal Analyzer</i>	Brochure	5989-5047EN
<i>Agilent MXA Signal Analyzer</i>	Photo Card	5989-4940EN
<i>Agilent MXA Signal Analyzer</i>	Configuration Guide	5989-4943EN
<i>Agilent MXA Self Guided Demo</i>	Product Note	5989-5350EN
Application Notes		
<i>Using the Agilent MXA Signal Analyzer for Measuring and Troubleshooting Digitally Modulated Signals</i>	Application Note	5989-4944EN
<i>Using MXA Preselector Turning for Amplitude Accuracy in Microwave Spectrum Analysis</i>	Application Note	5989-4946EN
<i>Maximizing Measurement Speed with the Agilent MXA Signal Analyzer</i>	Application Note	5989-4947EN
<i>Spectrum Analysis Basics</i>	Application Note 150	5952-0292
<i>Vector Signal Analysis Basics</i>	Application Note 150-15	5989-1121EN

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

Agilent Open

www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.

www.agilent.com/find/mxa

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

United States:

(tel) 800 829 4444
(fax) 800 829 4433

Canada:

(tel) 877 894 4414
(fax) 800 746 4866

China:

(tel) 800 810 0189
(fax) 800 820 2816

Europe:

(tel) 31 20 547 2111

Japan:

(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:

(tel) (080) 769 0800
(fax) (080) 769 0900

Latin America:

(tel) (305) 269 7500

Taiwan:

(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:

(tel) (65) 6375 8100
(fax) (65) 6755 0042

Email: tm_ap@agilent.com

Contacts revised: 05/27/05

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2006

Printed in USA, August 31, 2006

5989-4942EN

