



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892




www.AHSystems.com

PAM-0202

Preamplifier
20 MHz – 2 GHz

With at least 30dB of gain, this preamplifier will improve overall system sensitivity. Designed to meet the needs of your various testing requirements.

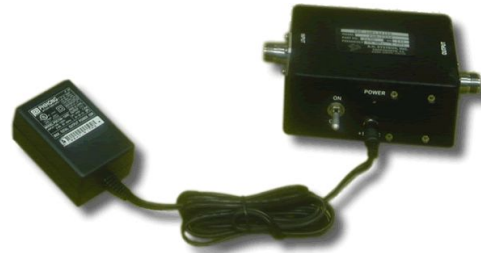

Frequency Range: 20 MHz – 2 GHz
Gain (typical): 30.4 dB
Gain (minimum): 29.5 dB
Flatness: +/- 0.7 dB
Noise Figure: 4.0 dB
Output Power @ 1 dB compression + 6 dBm
Input VSWR (typical): Less than 1.5:1
Output VSWR (typical): Less than 1.8:1
Connector: N-Type, female

Physical Dimensions

Height: 2.5 in. (63 mm)
Width: 3.75 in. (95 mm)
Length: 6.25 in. (158 mm)
Weight: 1.1 lb.'s (0.5 kg)

Features

- Wide Bandwidth of 20 MHz to 2 GHz
- Low VSWR, High Gain
- Individually Calibrated
- Rugged Design

The PAM-0202 preamplifier is an excellent choice for improving system dynamic range. The performance of this preamplifier will increase your system sensitivity by at least 30 dB. When measuring in the EMC lab or out in the field for general RFI testing, this preamplifier has a rugged compact design.

Recommended Accessories

- SAS-510-2 (Log Periodic Antenna)
- SAC-213 (3 Meter Cable)
- SAC-213-0.5 (0.5 Meter Cable)



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223
Fax: (818) 998-6892

◆ sales@AHSystems.com
◆ www.AHSystems.com



A.H. Systems Inc.

9710 Cozycroft Ave. Chatsworth, CA 91311
Phone (818) 998-0223 Fax (818) 998-6892
E-mail: sales@A.H.Systems.com
Web site: <http://www.AHSystems.com>

Preamplifier Gain (dB)
Model: PAM-0202

