



# SRM-3006 5G Code Selective Measurement

- › **Measurement concept**  
Measuring principle of code-selective measurement at 5G.
- › **SRM based implementation**  
Details of the intended measurement implementation based on the SRM.
- › **Availabilities**  
Implementation schedule

update  
December 2020



# Measurement concept

## Measurement

The measurement method is based on determination of the radiated field strength of the primary or secondary signaling signals (PSS or SSS) in the broadcast channel (PBCH) of the downlink.



Advantages of the code selective measurement:

- › It is independent of the cell load, so it can be performed at any time without the need for on-site participation by the system operator
- › It also works with beamforming antennas, which are more often used for 5G systems.
- › It can distinguish between different segment antennas, which enables evaluation of individual segment antennas right up to the sum of all the cellphone stations.
- › The measurement is unaffected by the cellphone system uplink signals. This is important when TDD systems are employed, which is the major technology used for 5G NR.

## Structure of SS/PBCH block

PSS (red) and SSS (green) are signals inside the physical broadcast channel (**SS/PBCH**) block

- › The entire block is 240 subcarriers broad and 4 symbols long
- › PSS and SSS are 127 subcarriers broad and 1 symbol long

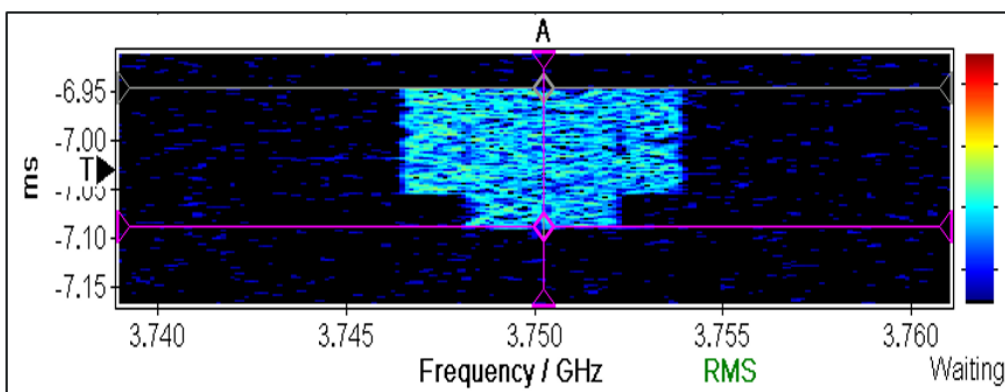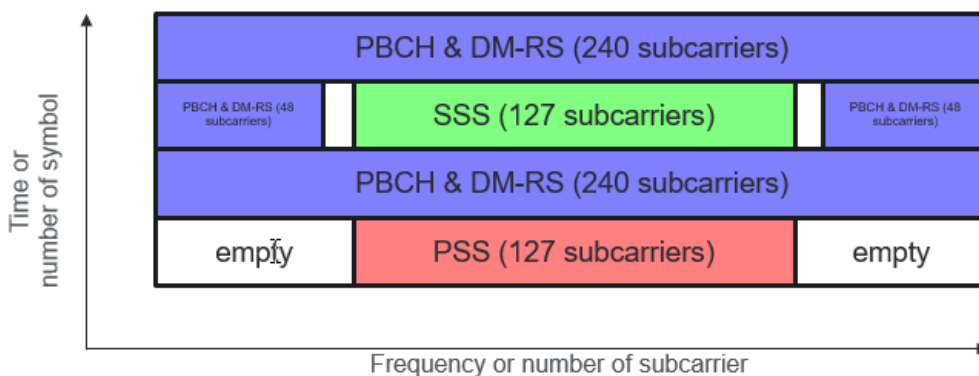

### Measurement Bandwidths

The bandwidth of the SS/PBCH block and the SSS/PSS signal are defined as follows:

- > SS/PBCH block has a bandwidth of  $240 \times \Delta f$
- > The SSS/PSS signal bandwidth is  $127 \times \Delta f$

The subcarrier spacing of the PBCH block “ $\Delta f$ ” can have the following values for carrier frequencies  $\leq 6$  GHz:

- > 15 kHz, 30 kHz, 60 kHz

This results in the following bandwidths:


$\Delta f$	0,015 MHz	0,030 MHz	0,060 MHz
SS/PBCH	3,600 MHz	7,200 MHz	14,400 MHz
SSS	1,905 MHz	3,810 MHz	7,620 MHz
PSS	1,905 MHz	3,810 MHz	7,620 MHz

Note:  
5G signals above 6 GHz require significantly larger measurement bandwidths. This SRM can only perform frequency-selective measurements in these higher frequency bands.

### SS/PBCH Frequency

In contrast to 4G, 5G synchronization SS/PBCH can be shifted individually by the operator inside the frequency band. If frequency of the synchronization is unknown, it has to be located by a spectrum measurement or automatically by the measurement device.


E.g.: 100 MHz bandwidth system with synchronization at lower edge of spectrum

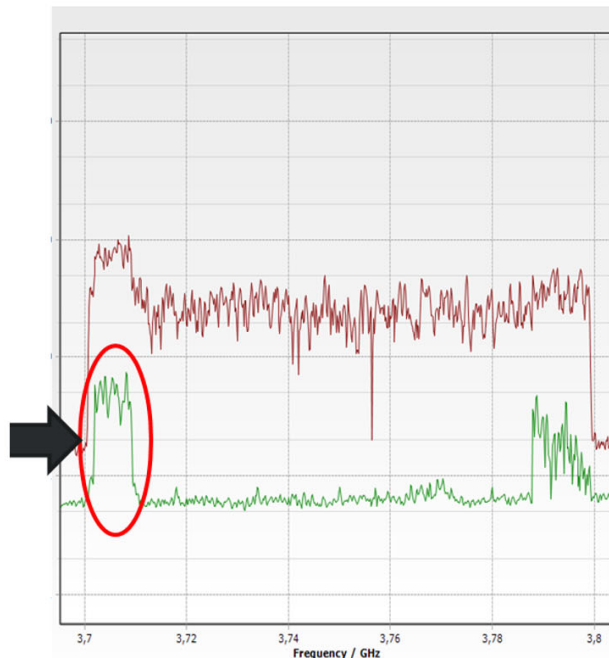

### TDD vs. FDD


Most base stations are expected to use TDD, in which uplink and downlink are multiplexed over time slots.

- > This improves the utilization of the available frequency spectrum.
- > Since often more data is required for the downlink than for the uplink, TDD allows additionally the data rate to be adjusted accordingly via the number of timeslots.

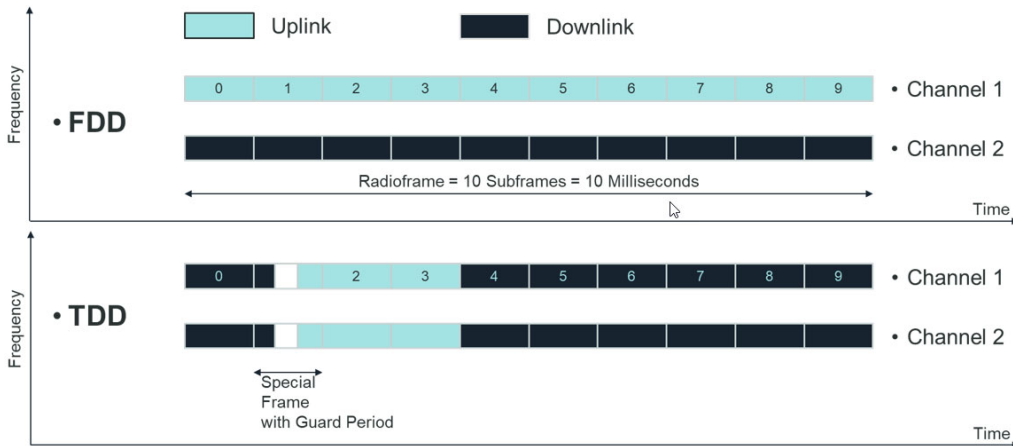

### Extrapolation


For the extrapolation of 5G signals several parameters have to be considered due to the use of TDD and beam forming. Even though there will be different extrapolation methods depending on the country, which differ slightly from each other, the basic principle can be described as follows:

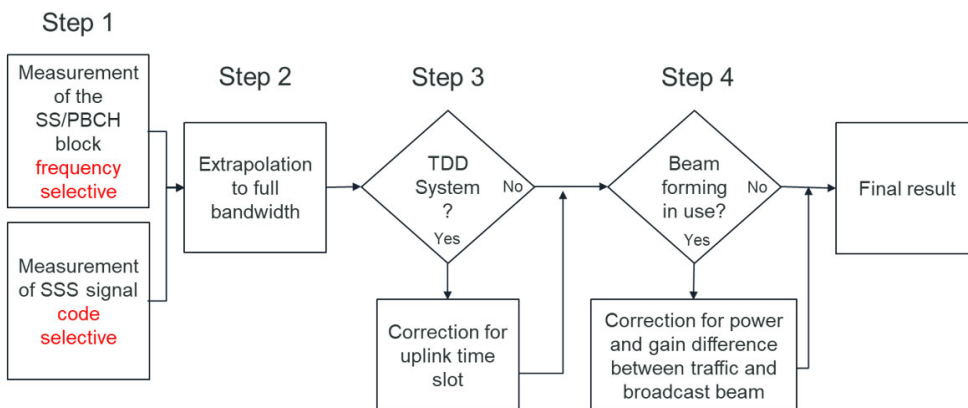

# SRM based implementation

## SRM 5G Measurement Mode

The measurement mode can be accessed via the "More" button. TDD/FDD will be set via a parameter within the mode.

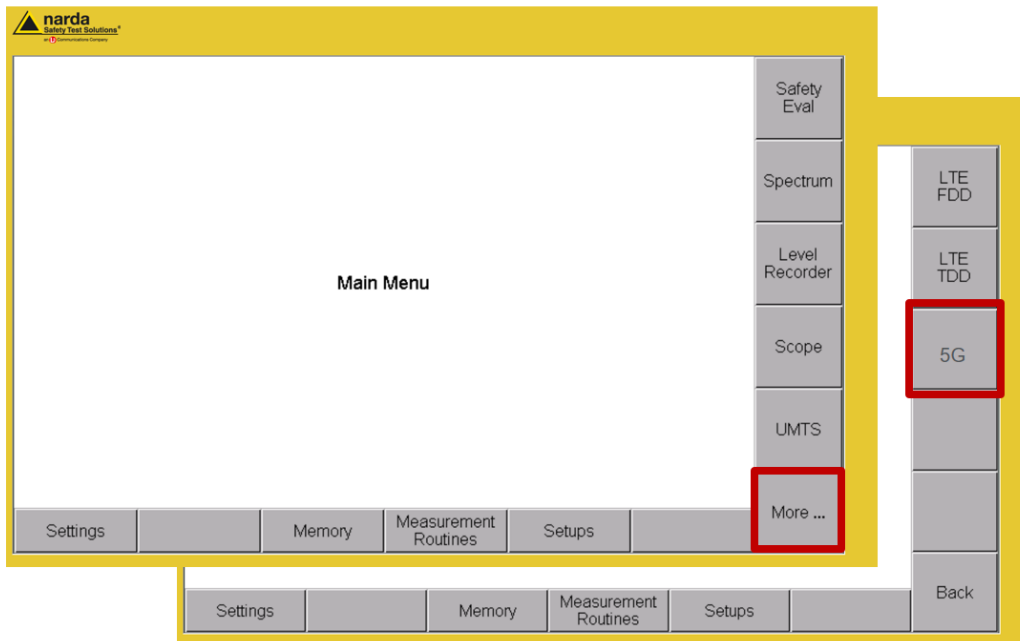

## Exposure Evaluation

The exposure evaluation is usually performed in two steps:

- > 1. Code selective measurement of the above-mentioned signals
- > 2. Extrapolation to the maximum possible exposure level. The method used to calculate this extrapolation is currently under discussion and evaluation by the standardization bodies.

## SRM 5G Code Selective Measurement - Firmware Option supports:

- > Code selective measurement of the SSB0 – SSB7 levels

# Ordering Information

## SRM 5G Code Selective Measurement - Firmware Option

SRM 5G Code Selective Measurement	Firmware Option
<b>Part number:</b>	3701/08
<b>Description:</b>	Option, 5G NR
<b>Compatibility:</b>	All SRM-3006
<b>Availability:</b>	Q2 2021

**Narda Safety Test Solutions GmbH**  
 Sandwiesenstrasse 7  
 72793 Pfullingen, Germany  
 Phone +49 7121 97 32 0  
 info.narda-de@L3Harris.com

**L3Harris Narda STS**  
 North America Representative Office  
 435 Moreland Road  
 Hauppauge, NY11788, USA  
 Phone +1 631 231 1700  
 NardaSTS@L3Harris.com

**Narda Safety Test Solutions S.r.l.**  
 Via Rimini, 22  
 20142 Milano, Italy  
 Phone +39 0258188 1  
 nardait.support@L3Harris.com

**Narda Safety Test Solutions GmbH**  
 Beijing Representative Office  
 Xiyuan Hotel, No. 1 Sanlihe Road, Haidian  
 100044 Beijing, China  
 Phone +86 10 6830 5870  
 support@narda-sts.cn

[www.narda-sts.com](http://www.narda-sts.com)