

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 21214-5-TS-250-N

Specifications:

Current rating: 250 amperes
 Inductance: 5 μ H
 Frequency range (recommended): 1 kHz – 400 MHz
 Voltage (line to ground): 400 VDC, 270 V 50 – 60 Hz, 135 V 400 Hz
 Power connections: TS 1/4-20 threaded stud
 RF connector: Type N
 Coupling capacitor: 0.10 μ F
 Circuit: Single
 Case size: 10.29" x 9.25" x 13.00" (26.14 cm x 23.50 cm x 33.02 cm)
 Overall length with base plate: 17.00" (43.18 cm). Equipped with 6.50" (16.51 cm)
 50-60 Hz ventilating fan. Specify voltage: 110V/115 V or 220V/230V
 Overall length with base plate and fan overhang: 21.50" (54.61 cm)

Remarks: Designed for DO-160G and DEF STAN 59-411 Part 3. Includes 10 μ F capacitor on line side. Specifications subject to change without notice.

Rev. June 28, 2017

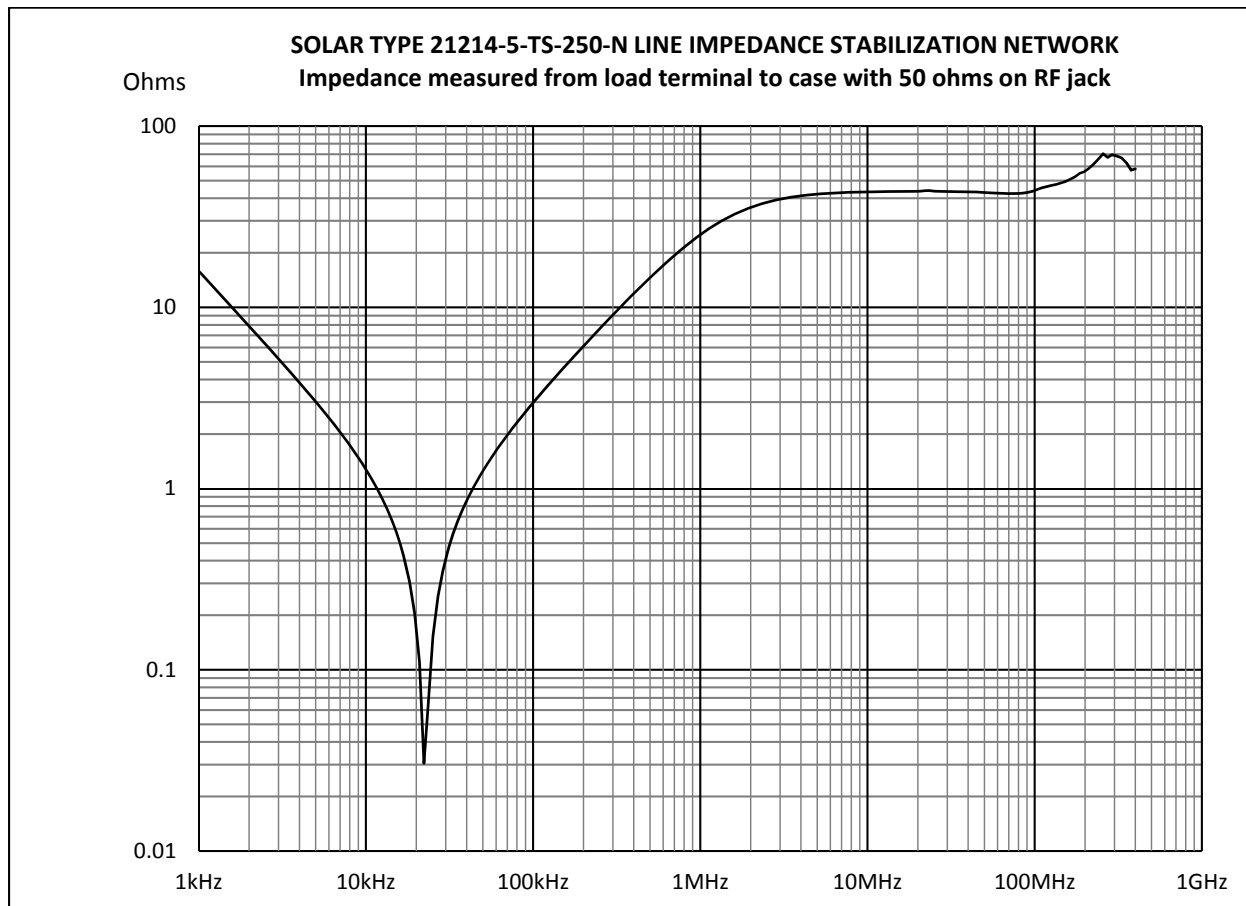

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.