

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 8028-50-BP-25-BNC (formerly 8028-50-TS-24-BNC)

Specifications:

Current rating: 25 amperes
 Inductance: 50 μ H
 Frequency range (recommended): 10 kHz – 50 MHz
 Voltage (line to ground): 400 VDC, 270 V 50-60 Hz, 135 V 400 Hz
 Power connections: $\frac{3}{4}$ " standard binding post
 RF connector: Type BNC
 Coupling capacitor: 0.25 μ F
 Circuit: Single
 Case size: 5.26" x 5.29" x 10.00" (13.36 cm x 13.44 cm x 25.40 cm)
 Overall length with base plate: 12.00" (30.48 cm)

Remarks: Designed for MIL-STD-461D/E/F/G.
 Specifications subject to change without notice.

Rev. October 6, 2016

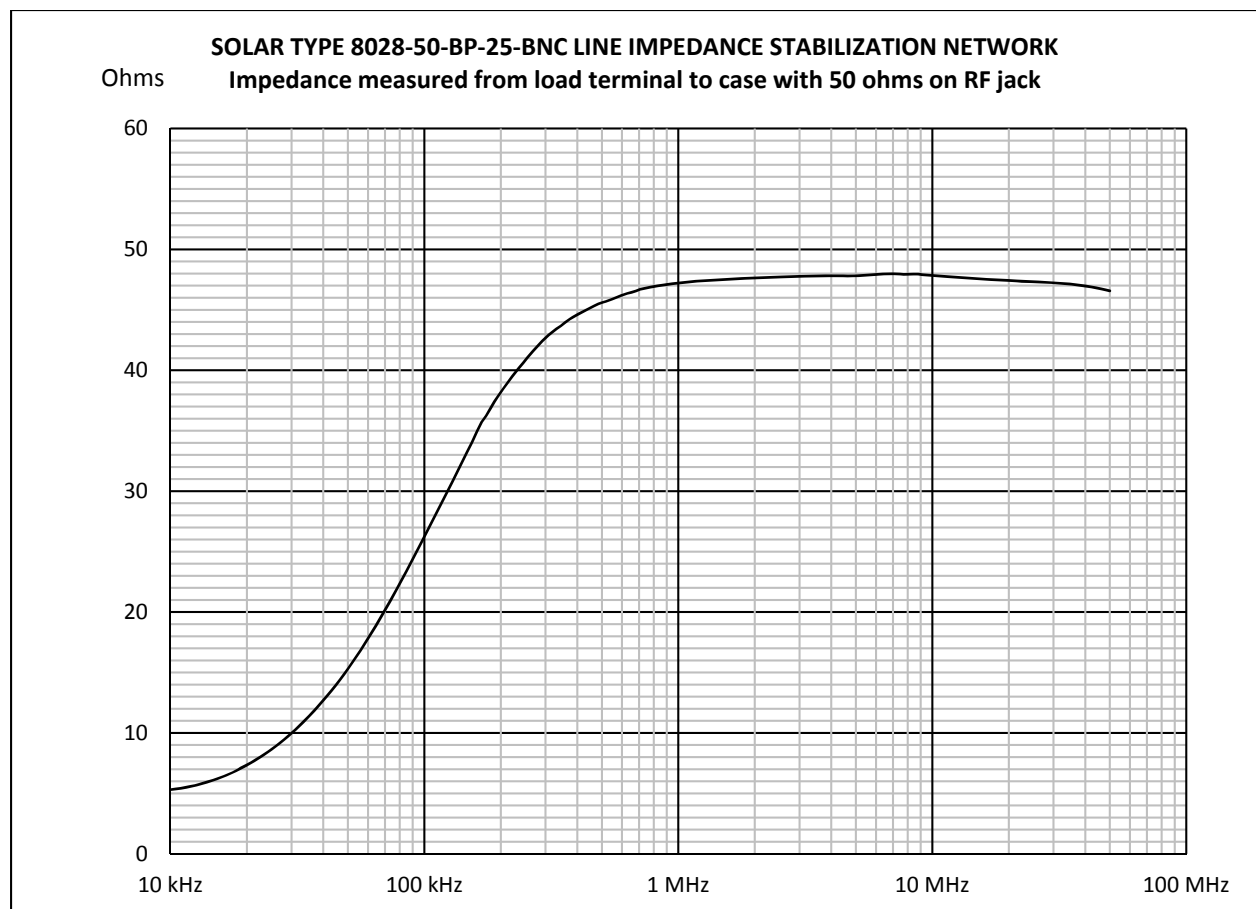

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com