



.56 [14.3] DIA. HOLE
4 PLACES ON BOTTOM
FLANGES FOR CUSTOMER
MOUNTING

LOUVER VENTS
BOTH SIDES

NAMEPLATE
50.77 [1289.7]
SEE SHEET #2 FOR PANEL DETAIL



26.25 [666.9]

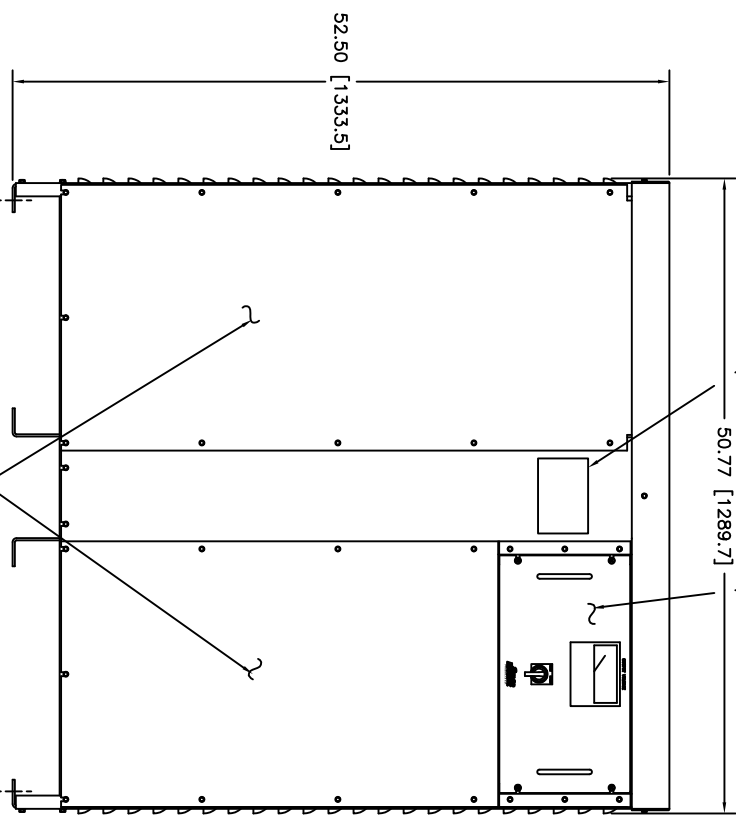

ACCESS PANELS TO
FUSES & TERMINALS

RECOMMENDED AREAS
FOR CONDUIT ENTRY.


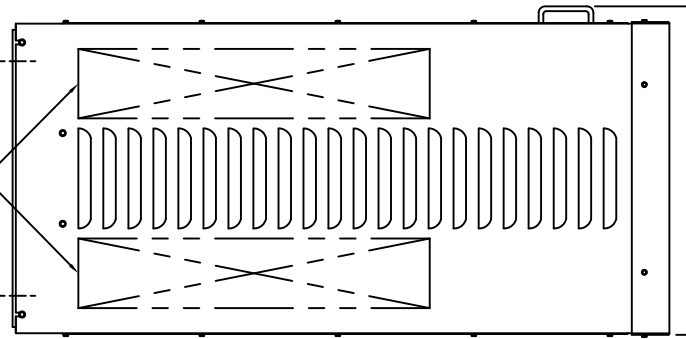


FIGURE A
MAXIMUM OUTPUT CURRENT OF ANY
DUAL INPUT VOLTAGE OR VOLTAGE DOUBLER
UNIT OPERATED AT LOWER INPUT VOLTAGE.

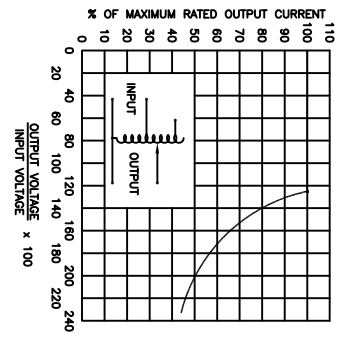

MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25% ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, OUTPUT CURRENT MUST BE REDUCED ACCORDING TO RATING CURVE, FIGURE A.
++ MAXIMUM KVA AT MAXIMUM OUTPUT AND CORRESPONDING DE-RATED CURRENT. MAXIMUM KVA AT LOWER OUTPUT VOLTAGES MAY BE CALCULATED FROM RATING CURVE, FIGURE A.
V.D. = VOLTAGE DOUBLER.


NOTES:
UNIT IS A 60M6020E-18Y WITH RAISE/LOWER
CONTROL PANEL & VOLTMETER.

SPECIFICATIONS		INPUT		OUTPUT		TERMINAL CONNECTIONS FOR INTERSING VOLTAGE AS VIEWED FROM TOP	
WIRING	VOLTS HERTZ	VOLTS	CONSTANT CURRENT LOAD	MAX. AMPS	MAX. KVA	ROTATION FOR VOLTAGE INCREASE	INPUT [OUTPUT]
THREE PHASE WYE	480 60	0-480 60	210	174.6	210	203.4	4-4-4 D-D-D
	240	0-560	210	203.4	210	203.4	2-2-2 D-D-D
		0-560	210	97.2	97.2	97.2	5-5-5 D-D-D
SPEC. CONTROL DRAWING		SHAFT ROTATION FOR VOLTAGE INCREASE		TERMINAL CONNECTIONS FOR INTERSING VOLTAGE AS VIEWED FROM TOP		TERMINAL CONNECTIONS FOR INTERSING VOLTAGE AS VIEWED FROM TOP	
MOTOR TEST SET TYPE: 094-5340		CW		CW		CW	

REV	DATE	BY	CHKD
A	28/146	11/4/18	
UPDATED LOGO			



094-5340

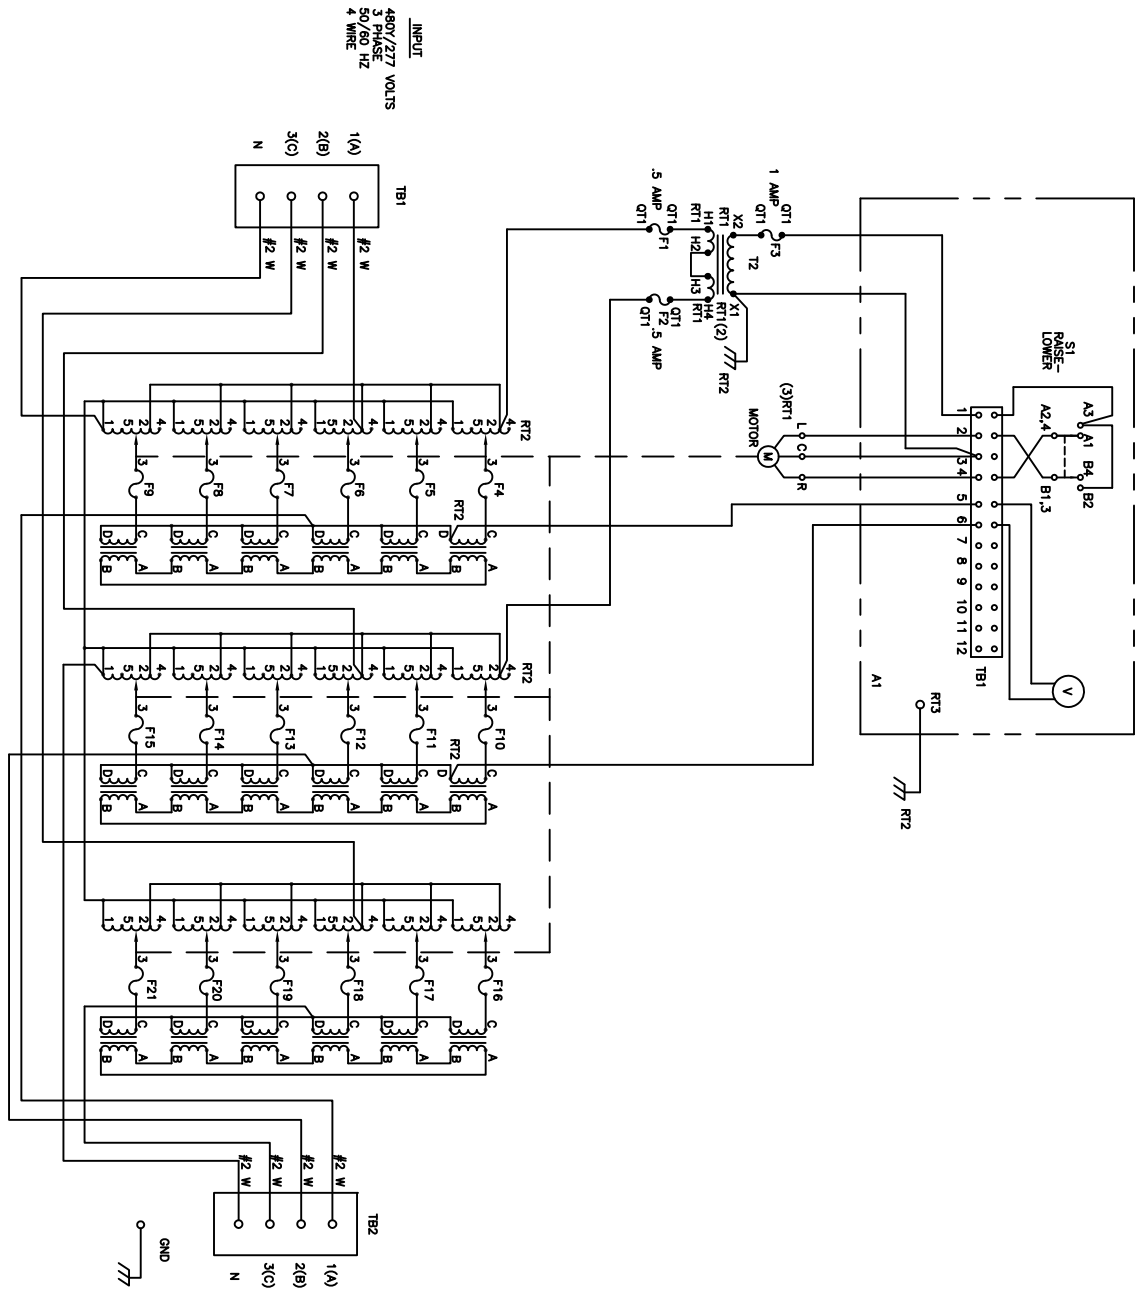

INPUT
 480V/277 VOLTS
 3 PHASE
 50/60 HZ
 4 WIRE


OUTPUT
 0-560 VOLTS
 210 AMPS
 203.4 KVA

NOTE:
 ALL UNMARKED WIRES ARE #20 AWG 105°C 600V PVC.

REF. DES.	PART NUMBER	DESCRIPTION	QTY.
OT1	676-0078	TERMINAL #22-18 AWG. 1/4 Q.C.	6
RT3	676-0027	TERMINAL #18-22 AWG. - #10 STUD	1
RT2	676-0124	TERMINAL #22-18 AWG. - 1/4 STUD	6
RT1	676-0050	TERMINAL #22-18 AWG. - #6 STUD	2
T1-TB2	688-0362	TERMINAL BLOCK 4 POLE	2
T2	712-0436	TRANSFORMER - CONTROL	1
T1	034-8529	VARIABLE AUTOTRANSFORMER	1
F4-F21	307-0195	FUSE - 40 AMP, 600V	18
F3	307-0041	FUSE - 1 AMP, 600V	1
F1, F2	307-0003	FUSE - 5 AMP, 600V	2
A1	924-0307	METER PANEL ASSY	1

SYSTEM SCHEMATIC
 094-5340


DATE: 4/06/98
 DRAWN BY: []
 CHECKED BY: []
 SCALE: 1=1
 SHEET 1 OF 1


 GSPACO
 A DIVISION OF GSP
 10000 GSP DRIVE
 DARTMOUTH, OHIO U.S.A.

REV	DATE	BY	DESCRIPTION
A	28/1/16	11/3/16	UPDATED LOGO

19.00 REF.


10.47 REF.

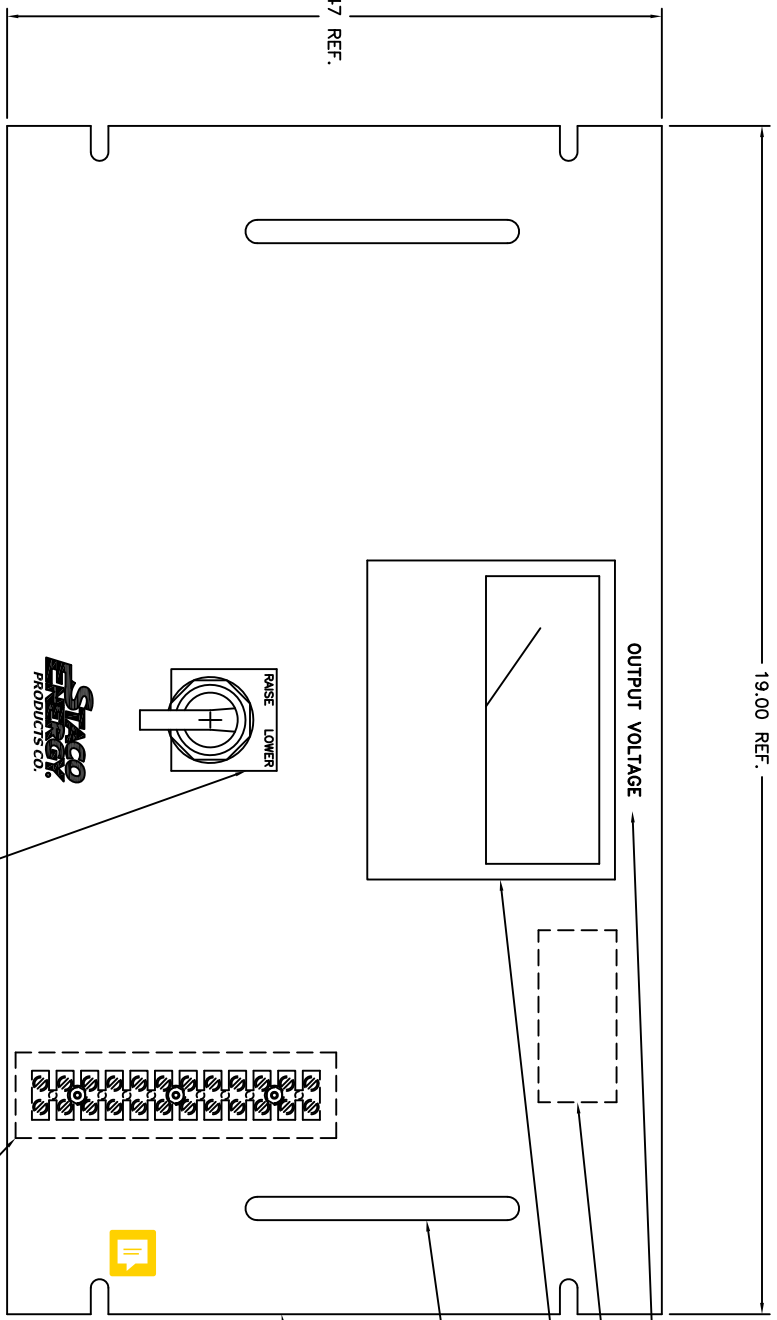

664-0417
SELECTOR SWITCH
436-0186 LEGEND

688-0535 TERMINAL STRIP
620-1365 SPACER - 600V
732-0525-N6 #4 FWS (3)
732-0331-N6 #4 SLWS (3)
472-0042-N6 #4-40 HMSNS (3)
639-2551 STENCIL (BLACK)

639-2613 SCREEN
465-0369 NAMEPLATE
447-0069 VOLTMETER (0-600V)
353-0101 HANDLE
(2) PLACES
506-0535 PANEL



REAR VIEW
MARK AS SHOWN

STACO ENERGY PRODUCTS CO. 2000 W. BROADWAY, SUITE 100, DENVER, CO 80202 TEL: 303.733.1111 FAX: 303.733.1112 WWW.STACOENERGY.COM		METER / SWITCH PANEL ASS'Y	DATE: 1/24/97 SCALE: 1/1	REV: 1 OF: 1
---	--	---------------------------------------	-----------------------------	-----------------

STACO ENERGY PRODUCTS CO. 2000 W. BROADWAY, SUITE 100, DENVER, CO 80202 TEL: 303.733.1111 FAX: 303.733.1112 WWW.STACOENERGY.COM	DATE: 1/24/97 SCALE: 1/1	REV: 1 OF: 1	PART NO: 924-0307
---	-----------------------------	-----------------	-------------------