


Probes for Current Measurement Systems

A6312 • A6302 • A6302XL • A6303 • A6303XL • A6304XL • CT4

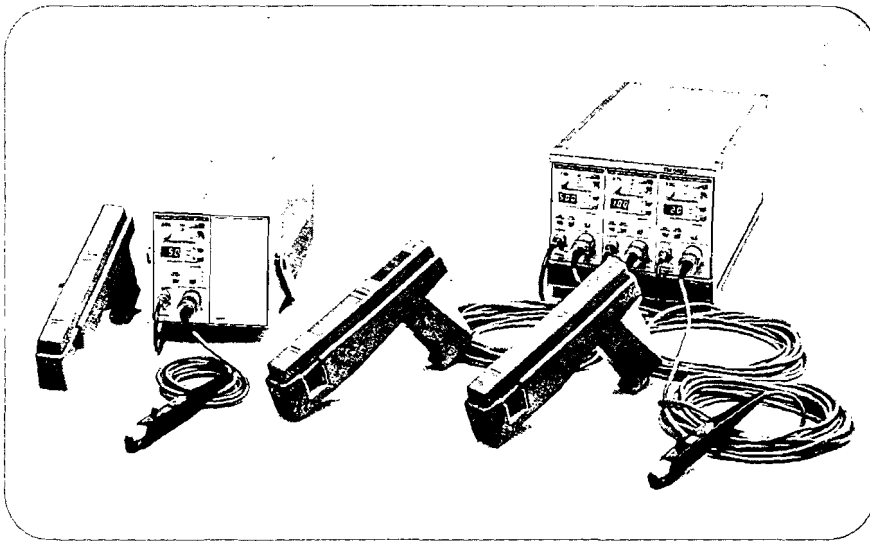


► **AM503 Current Measurement Family.**

AM503 Family Current Probes

A total of six current probes are available for use with the AM503B and AM5030 Current Probe Amplifiers. Since all six probes are of the split-core mechanical design, they easily clip on and off of a conductor. All the probes provide simultaneous DC and AC current measurements with a wide range of current amplitude and bandwidth capabilities.

The AM503 Current Probes convert the DC and AC flux field of a conductor to a voltage signal which is sent to an AM503B or AM5030 Amplifier. The probes include both a Hall Effect device, which senses the DC current, and a ferrite transformer which senses the AC current. The probes also utilize a bucking current from the Amplifier, which eliminates core saturation. The bucking current for the A6302XL is 20 A, 100 A for the A6303XL and 500 A for the A6304XL.

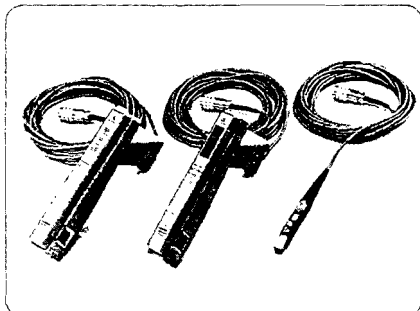

► **A6303XL, A6304XL and A6302XL.**
The Eight-meter XL Series Current Probes.

A6312, A6302 and A6303 Current Probes

The A6312, A6302 and A6303 offer a wide range of current measurement capability for the lab and bench environment. The A6312 covers frequencies from DC to 100 MHz while the A6302 covers DC to 50 MHz. Both clip onto conductors up to 3.81 mm (0.15 in.) in diameter and measure continuous currents up to 20 A and peak currents up to 50 A as long as they do not exceed the amp*second product of 100 A* μ s.

The larger A6303 measures higher amplitude, lower frequency currents. It clips onto conductors up to 21.1 mm (0.83 in.) in diameter. Its frequency range is DC to 15 MHz. It will measure continuous currents up to 100 A and peak currents up to 500 A, as long as the Amp*second product of 10,000 A* μ s is not exceeded.

The A6312, A6302 and A6303 are also compatible with the 11A16 2-CH Current Probe Amplifier for the 11000 and DSA Series oscilloscopes. With the 11A16, the A6312 and A6302 are rated for 10.5 A and the A6303 for 52.5 A.

XL Series Current Probes

The three XL current probes add both convenience and expanded current measurement capability. The XL probes are designed to operate with the AM503B and AM5030 Current Probe Amplifiers. They are incompatible with the older AM503 and AM503A amplifiers. The XL (for extra long) probes have eight-meter cables, which allow you to reach test points on large devices such as heavy

► Features & Benefits

A6312 **

20 Amps Continuous/50 Amps Peak
DC to 100 MHz
Up to 0.15 in. Conductor Diameter

A6302 **

20 Amps Continuous/50 Amps Peak
DC to 50 MHz
Up to 0.15 in. Conductor Diameter

A6302XL **

20 Amps Continuous/50 Amps Peak
DC to 17 MHz

A6303 **

100 Amps Continuous/500 Amps Peak
DC to 15 MHz
Up to 0.83 in. Conductor Diameter

A6303XL **

100 Amps Continuous/500 Amps Peak
DC to 10 MHz

A6304XL **

500 Amps Continuous/700 Amps Peak
DC to 2 MHz

CT4

Pulsed Currents to 20,000 A
Continuous Currents up to 2,000 A_{p-p}
Accepts 1.5 in. Diameter Conductors
Measurements on Bare Conductors to 3,000 V_P (1,000 V_{RMS} CAT III)

► Applications

Motor Drives
Satellite Systems
Inverters
Transportation Systems
Power Supplies
Avionics

** 2 Meter Cable

** 8 Meter Cable

For your local Tektronix representative see the list in the back of this catalog or outside the U.S. call: 1-503-627-7111, inside the U.S. call: 1-800-833-9200.

CE

ISO 9001

Tektronix measurement products are manufactured in ISO registered facilities.

Probes for Current Measurement Systems

A6312 • A6302 • A6302XL • A6303 • A6303XL • A6304XL • CT4

duty motors or automobiles. In addition, connecting to test points on transportation platforms such as trains, ships or aircraft is much easier with the XL probes.

The A6302XL and A6303XL are modified versions of the A6302 and A6303 probes. The A6302XL can measure 20 A continuous (50 A peak) signals from DC to 17 MHz. The A6303XL can measure 100 A continuous (500 A peak) signals from DC to 10 MHz.

The A6304XL is rated for 500 A continuous (700 A peak) and is the same size as the A6303XL. The A6304XL has a bandwidth of DC to 2 MHz and is especially well suited for measurements on high-performance inverters, motor drives and other high current switch-mode control devices. The eight meter cable makes it very easy to access test points on devices physically separated from your measurement instrument.

Safety (All)

UL3111-1, CSA1010.2-032, EN61010-2-032, IEC61010-2-032.


CT4 Current Probe

The CT4 is a robust clip-on high current transformer that extends the measurement capability of the P6021, A6302/XL, A6302, A6312 and TCP202 clip-on current probes. Maximum low frequency performance down to 0.5 Hz is obtained using the AM 503S. Current amplitudes to 20,000 A may be measured using the A6302/XL, P6021, A6302, A6312 or TCP202 (with passive termination), provided the amp*sec-ond ratings are not exceeded.

The CT4 may be used with the P6021 for measurements at normal line frequency and above. (The P6022 and A6303 are not compatible with the CT4.)

The CT4 has receptacles for current probes in either 20:1 or 1000:1 step-down ratios.

The 1.5 in. square split-core opening makes it possible to clip onto large conductors without breaking the circuit under test. Insulated core and shield assemblies allow measurements on bare wires to 3000 V_p (1000 V_{RMS} CAT III) and to 14 kV with the included high voltage bushing.

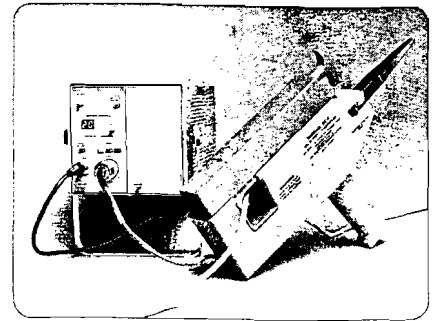

▶ CT4.

▶ Ordering Information

Current price information is available worldwide on-line from the Tektronix web site or from your local Tektronix representative. Inside the U.S., also see the price list in the back of this catalog.

A6312

100 MHz, 2 m, 20 A current probe.

Includes: 6 in. (152 mm) ground lead (196-3120-01) and A6312 instruction manual (070-9603-00).

A6302

50 MHz, 2 m, 20 A Current Probe.

Includes: 6 in. (152 mm) ground lead (196-3120-01), A6302 and A6302/XL instruction manual (070-9605-04).

A6303

15 MHz, 2 m, 100 A current probe.

Includes: Carrying case (202-0318-00); A6303 and A6303/XL instruction manual (070-3905-04).

Note: A6302/A6303 probes must be used with an AM503, AM503A, AM503B or AM5030 current probe amplifier.

A6302XL

17 MHz, 8 m, 20 A current probe.

Includes: Same as A6302 current probe.

A6303XL

10 MHz, 8 m, 100 A current probe.

Includes: Same as A6303 current probe.

A6304XL

2 MHz, 8 m, 500 A current probe.

Includes: Carrying case (202-0318-00); A6304XL instructions (070-8939-01).

Note: XL probes work only with AM503B or AM5030 current probe amplifiers.

CT4

Current probe, high current.

Includes: Carrying case (202-0318-00); 12 in. wide, 4 ft. long high voltage bushing (015-0194-00); instruction manual (070-6478-02).

Support Options A6303/ A6302XL/A6303XL/A6304XL

Opt. R3 – Repair warranty extended to cover three years.


Opt. R5 – Repair warranty extended to cover five years.

See page xxx for further information.

Education and Training

For Customer Training on this product outside the U.S., call 1 (503) 627-7510; inside the U.S., call 1 (800) 833-9200, ext. 77510.

▶ For your local Tektronix representative see the list in the back of this catalog or outside the U.S. call: 1-503-627-7111, inside the U.S. call: 1-800-833-9200.



Tektronix measurement products are manufactured in ISO registered facilities.