


**Agilent  
Coaxial Frequency Meter  
536A 0.96 to 4.2 GHz  
537A 3.7 to 12.4 GHz**

Data Sheet



**537A**

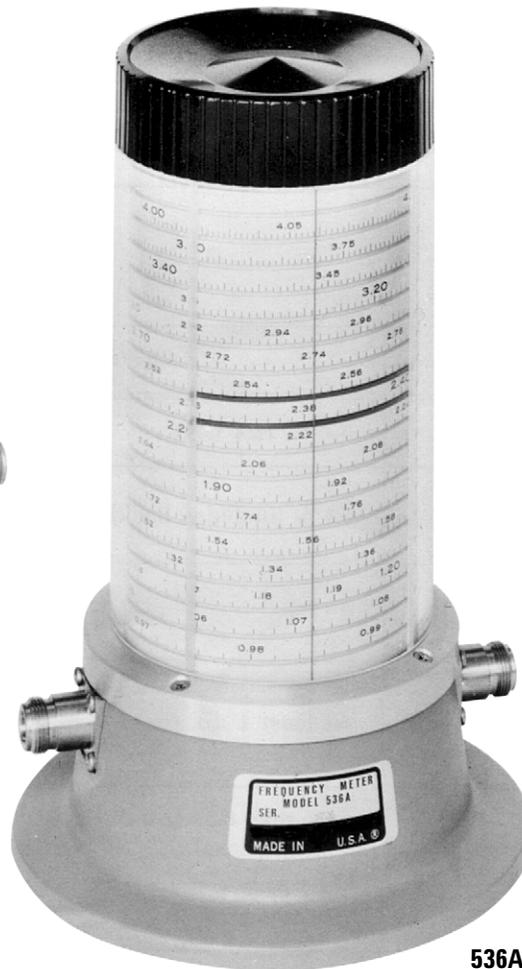

**536A**

- Broadband
- Direct-reading
- No spurious resonances
- High resolution, easy to read dial
- Accuracy specified with T"temperature and humidity



## Description

frequencies 960 MHz to 4.2 GHz and 3.7 to 12.4 GHz can be read directly and accurately with Agilent 536A and 537A coaxial frequency meters. Convenient readout with high resolution is provided by long spiral dials. These dials have all frequency calibrations visible so you can tell at a glance the specific portion of each band you are measuring.

Overall accuracy of these frequency meters is 0.17% and includes such variables as dial calibration, temperature variation over a 20 °C range, relative humidity effects, and backlash. Extreme resolution and readability permit individual scale correction charts to be made and readings repeated with even higher accuracy. Calibration marks are every 2 MHz for the 536A and every 10 MHz for the 537A. Even at the high frequency end of the dial, minimum spacing between calibrations is such that you can easily resolve small differences of frequency. The tuning plunger is spring-loaded to eliminate backlash.

There are no spurious resonances at any setting. A one-quarter wavelength tuning mode is employed and capacitively loaded to prevent the three-quarter wavelength mode of higher frequencies from being excited and giving a spurious response. A well-matched section of strip line couples microwave energy into the cavity. Resonance is indicated by a dip in output power of approximately 1 dB. Cavity Q is typically greater than 1500 (536A).

## Specifications

	536A	537A
<b>Frequency range</b>	0.96 to 4.2 GHz	3.7 to 12.4 GHz
<b>Dial accuracy</b>	± 0.10% from 1 to 4.2 GHz ±0.15% from 0.96 to 1 GHz	0.1% (includes backlash)
<b>Overall accuracy<sup>1</sup></b>	± 0.17% from 1 to 4.2 GHz ±0.22% from 0.96 to 1 GHz	0.17%
<b>Dip at resonance</b>	At least 1 dB from 1 to 4 GHz At least 0.6 dB from 0.96 to 1 GHz	At least 1 dB
<b>Reflection coefficient off resonance</b>	Less than 0.091 (1.2 SWR, 20.8 dB return loss)	Less than 0.33 (2.0 SWR, 9.5 dB return loss)
<b>Calibration increments</b>	2 MHz	10 MHz
<b>Connectors</b>	Type-N female	Type-N female
<b>Dimensions</b>	Height: 9.125 inches (232 mm) Diameter: 6 inches (152 mm)	Height: 5.75 inches (146 mm) Base Diameter: 3.5 inches (89 mm) Width (including connectors): 4.625 inches (118 mm)
<b>Weight</b>	Net, 10 lb (4,5 kg) Shipping, 13 lb (5,9 kg)	Net, 3.3 lb (1,5 kg) Shipping, 4.5 lb (2 kg)

1. Includes allowance of ± 0.02% for 0 to 100% relative humidity, ± 0.0016% per °C from 13 to 33 °C and 0.03% backlash.

### Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

#### Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

#### Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

#### Agilent T&M Software and Connectivity

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit [www.agilent.com/find/connectivity](http://www.agilent.com/find/connectivity) for more information.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

#### Phone or Fax

**United States:**  
(tel) 800 829 4444  
(fax) 800 829 4433

**Canada:**  
(tel) 877 894 4414  
(fax) 800 746 4866

**China:**  
(tel) 800 810 0189  
(fax) 800 820 2816

**Europe:**  
(tel) 31 20 547 2111

**Japan:**  
(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

**Korea:**  
(tel) (080) 769 0800  
(fax) (080)769 0900

**Latin America:**  
(tel) (305) 269 7500

**Taiwan:**  
(tel) 0800 047 866  
(fax) 0800 286 331

**Other Asia Pacific Countries:**  
(tel) (65) 6375 8100  
(fax) (65) 6755 0042  
Email: [tm\\_ap@agilent.com](mailto:tm_ap@agilent.com)  
Contacts updated 9/17/04

#### [www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2004  
Printed in USA, October 1, 2004  
5952-1250



### Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)  
Get the latest information on the products and applications you select.



Agilent Technologies