





Specifications

| Model | LIN-115 | LI-210 | LI-215 |
|-------------------------------|---|---|---------------------------------------|
| Frequency | 150 kHz - 30 MHz | 9 kHz - 30 MHz | 9 kHz - 30 MHz |
| Lines + Ground | 2 | 2 | 2 |
| Max Current (Amp) | 15 | 10 | 15 |
| Voltage (line to ground) | 270 VAC | 270 VAC | 270 VAC |
| Inductor (μ H) | 50 | 50 & 250 | 50 & 250 |
| Output impedance (Ω) | 50 | 50 | 50 |
| Output Connector | N type | N type | N type |
| Power source frequency | DC-60 Hz | DC- 60 Hz | DC - 60 Hz |
| Transient limiter | Built in | Optional | Optional |
| Power in | IEC Power inlet | IEC Power inlet | IEC Power inlet |
| Power out | Euro type | NEMA | NEMA |
| Weight | 17 lbs. / 8 kg | 10 lbs /4.5 kg | 21 lbs./ 9.5 kgs |
| Size | 14 x 7 x 13 inches 35.5 x 17.7 x 33 cm | 16 x 10 x 5 inches 40.6 x 25.4 x 12 cm | 17 x 16 x 7 inches 43 x 40 x 18 cm |

Impedance characteristics

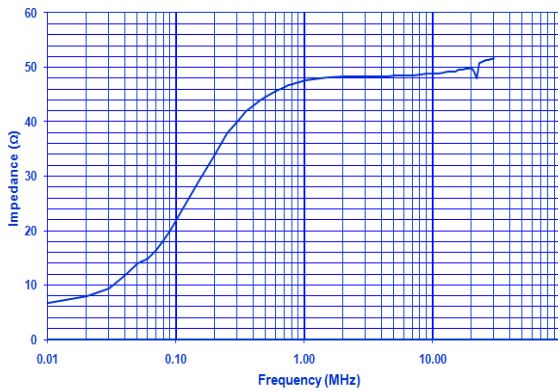

LI-210 or LI-215

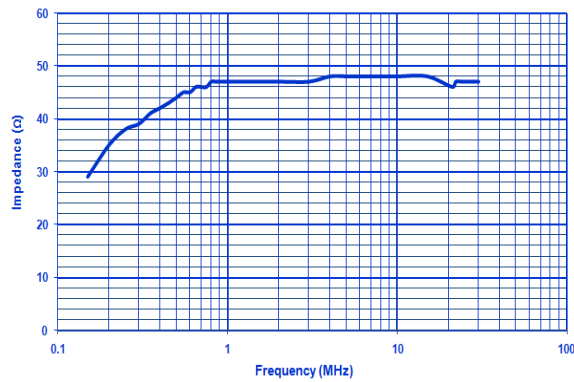

LIN-115

Specification subject to change without notice.
All values are typical unless specified.