

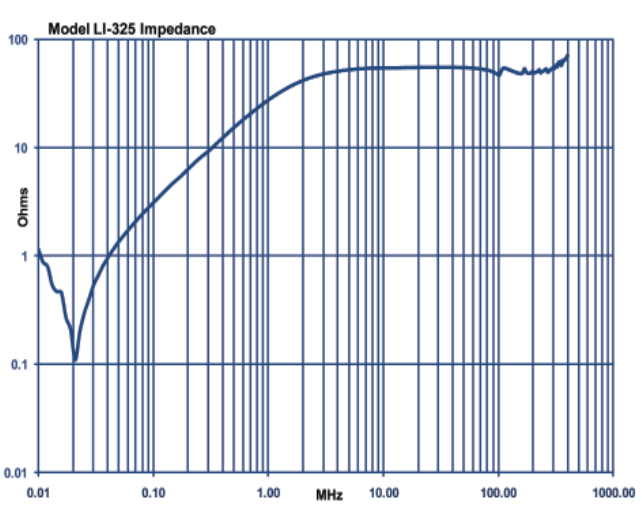
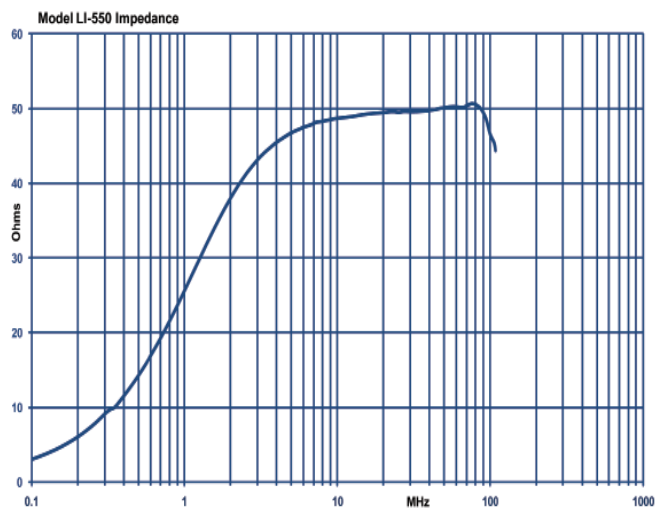


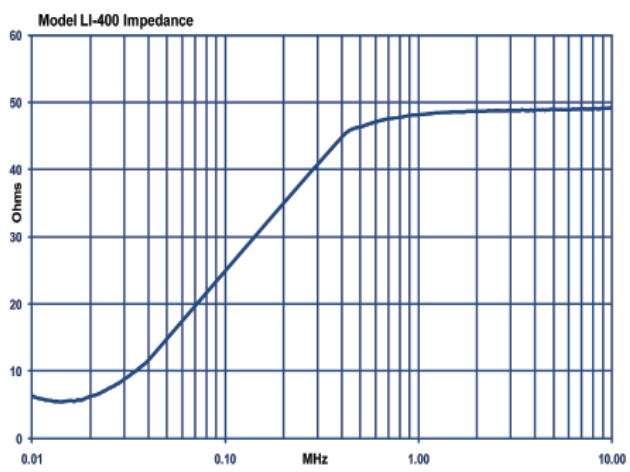

Specification

| Model | LI-125 | LI-150 | LI-325 | LI-400 | LI-550 |
|-----------------|--|--|--|--|--|
| Frequency | 150 kHz - 30 MHz | 150 kHz - 30 MHz | 10 kHz - 400 MHz | 10 kHz - 10 MHz | 100 kHz - 108 MHz |
| Lines | 2 | 2 | 2 | 2 | 2 |
| Max (current) | 25 A | 50 A | 25 A | 25 A | 50 A |
| Max (voltage) | 270 VAC / 380 VDC | 270 VAC / 380 VDC | 270 VAC / 380 VDC | 270 VAC / 380 VDC | 270 VAC / 380 VDC |
| Power Frequency | 60 / 50 Hz | 60 / 50 Hz | DC- 400 Hz | DC-400 Hz | 50 / 60 Hz |
| Inductor | 50 μ H Air Core | 50 μ H Air Core | 5 μ H Air Core | 50 μ H Air Core | 5 μ H Air Core |
| RF connector | 50 Ω N (f) | 50 Ω N (f) | 50 Ω N (f) | 50 Ω N (f) | 50 Ω N (f) |
| I/O Connectors | Superior \odot Plug | Superior \odot Plug | Superior \odot Plug | Superior \odot Plug | Superior \odot Plug |
| Weight | 25 lbs / 11.3 kg | 14 lbs / 6.3 kg | 5 lbs / 2.2 kg | 14 lbs / 6.3 kg | 14 lbs. / 6.3 kg |
| Size | 13 x 7 x 7 inches 33 x 17.7 x 17.7 cm | 15 x 10 x 10 inches 38 x 25.4 x 25.4 cm | 13 x 7.5 x 8 inches 33 x 19 x 20 cm | 13 x 7 x 7 inches 33 x 17.7 x 17.7 cm | 13 x 7 x 7 inches 33 x 17.7 x 17.7 cm |

Typical Impedance

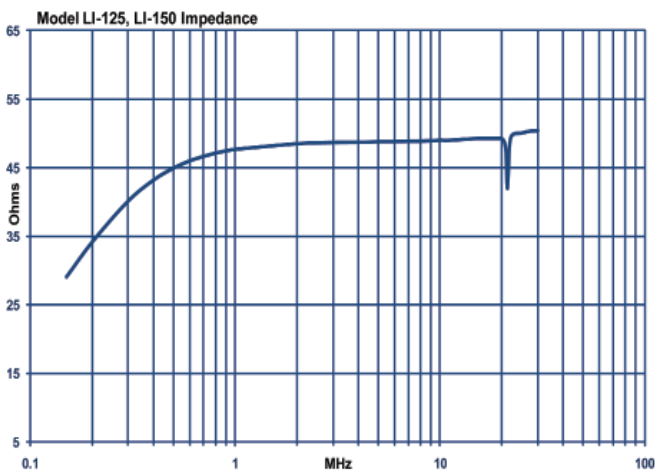

Specifications are subject to change without notice.
All values are typical unless specified