



Advanced Test Equipment Corp.
www.atecorp.com 800-404-ATEC (2832)



Product Brochure

4800 Compact Battery Cycler

Table of Contents

03 4800 Compact Battery Cycler

Applications

Best for

Key Features

04 High Density, Small Footprint, Fully Integrated Battery Cycler and Emulator

04 An Auto-Ranging Operating Envelope that Delivers

05 4800 Compact Battery Cycler Specifications

4800 Compact Battery Cycler

Applications



ELECTRIC
VEHICLES



ELECTRIC
TRUCKS



ELECTRIC
FLIGHT



ENERGY
STORAGE



MARINE



FUEL
CELLS



INDUSTRIAL



TEST LABS

BEST FOR:

Battery cycling and emulation applications requiring low to mid-level power across research, validation, and production labs

KEY FEATURES:

- Fully integrated battery cycler: built-in isolation contactor relays, pre-charge circuit, reverse polarity checker
- Voltage models from 80VDC
- Modular and scalable power (Parallel up to 165kW)
- High power density in 4U chassis
- High Performance Source and Regenerative Load
- Regenerative power > 90% (Typical)
- 100% SiC-based technology
- Fast transient speeds: Slew Rate < 1.5mS
- Modes: Charge/Discharge, Load, and Battery Emulation
- Optimize battery connections to minimize hazards
 - Low output capacitance relay isolated from UUT
 - Automatic soft-start re-charge function - Inrush Limiting
- Power Hardware-in-the-Loop (PHIL) Capability
- Air-cooled (no liquid cooling) provides simplified maintenance
- Advanced digital measurements with charting
- Control options: touch panel and SCPI
- Battery Test Software: Enerchron® Software

High Density, Small Footprint, Fully Integrated Battery Cycler and Emulator

The NHR 4800 is a highly versatile and compact battery cycler capable of delivering high-power performance in a 4U chassis. The multi-functional battery cycler can also serve as a DC source, DC load, battery emulator, and amplifier for power-level hardware-in-the-loop (PHIL) testing. The NHR 4800 delivers up to 80VDC and 400A in a single unit while delivering scalable power ranging from 16.5kW up to 165kW. The fully integrated battery cycler includes isolation contactor relays, pre-charge circuitry, and a reverse polarity checker. In addition to battery cycling (sourcing and loading), the 4800 includes a wide range of additional operating modes including a built-in battery cycling profile controller, Arbitrary Profiles (XY and Macros), Sinusoidal on DC, Maximum Power Point Tracking (MPPT) and more. The battery emulation mode allows for accurate emulation of batteries or other bi-directional DC busses for test applications that use batteries such as powertrain and propulsion, EV fast charging, and more. The PHIL feature provides additional testing capability that is especially required in research applications. The versatile system with integrated safety features can replace multiple instruments in research, validation, and production environments. The NHR 4800 can be operated from an integrated touch panel or automated through Enerchron Test Executive Software or using SCPI commands in LabVIEW and Python.

An Auto-Ranging Operating Envelope that Delivers

The 4800 provides a very wide operating envelope with higher current and power capability to meet your testing needs. Unlike traditional supplies which have a maximum power at only one voltage/current, the 4800 output automatically adjusts providing more current at lower voltages resulting in a much wider operating envelope with a constant power curve. For example, the 80V model provides up to 400A and 16.5kW of power (Figure 1) far exceeding the power capabilities of competitive auto-ranging models.

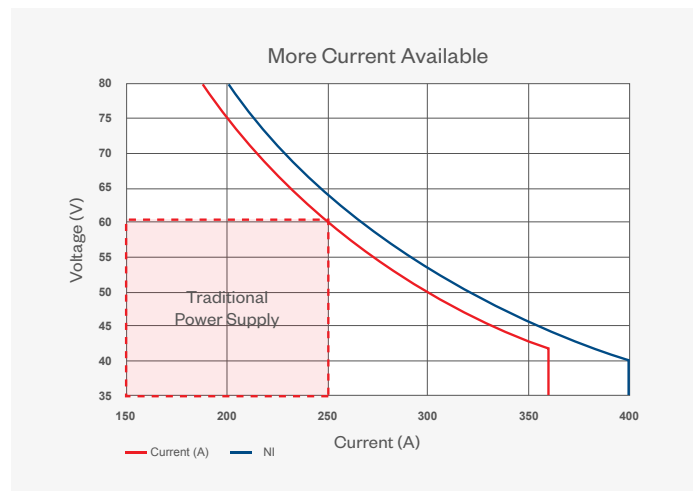


FIGURE 1
Auto Ranging Operating Envelope

4800 Compact Battery Cycler Specifications

MODEL NUMBER	80V 4808-16		
Power	16.5kW at 480VAC, reduced power of 13 KW at other input voltages		
Voltage Ranges	80V		
Maximum Current	400A		
Voltage Regulation Capability			
Accuracy	0.05% Set + 0.05% Range Measurement: 0.05% Reading + 0.05% Range Resolution 0.005% Range		
Programmable Range	0 - 102% Rating		
Line Regulation	0.05% Range		
Rise Time ($\pm 90\%$)	< 4 mS		
Power Regulation Capability			
Accuracy	0.12% Set + 0.12% Range Measurement: 0.12% Reading + 0.12% Range Resolution 0.005% Range		
Range	V Range * I Range		
Programmable Range	0 - 100% Rating		
Programming Capability			
Operating States Regulation	Charge (Source), Discharge (Load), Standby, Battery Emulation, AC on DC, MPPT (Load), XY, Battery Test, Arbitrary, Analog Control		
Set Point Limits	Constant-Voltage (CV), Current (CC), Power (CP), Series Resistance (CR)		
Trip Point Limits	V Min/Max, I Max (per direction), W Max (per direction)		
Macro Test Profiles			
Development Source Max.	Touch-Panel, Import from Excel, or User's System Controller	Max. Step Delay	1 mS - 7 days
Steps	1 profile up to 1000 or 2 profiles up to 500	Repeat Count	1 - 1000 times (or continuous)
Min.Time Delay	50 μ S		
Control			
Local User Int.	Touch-Panel with graphic meters and controls plus Macro screens	Analog Current Monitor	± 10 V representing -10 V full range loading and +10 V full range sourcing
Ext. Sys. Comm.	LAN (Ethernet) using SCPI	Analog Voltage Monitor	0 to +10 V full scale voltage
Analog Inputs	Two Analog Inputs also usable as additional DAQ measurement input	External Input	External input Interlock input and power-off (e0ff) input
Digital	4 Digital Inputs / 3 Digital Outputs	Software Watchdog	Programmable
Physical (Single 4U Module)			
Connectors	Main power through buss bars	Internal Mon.	Over-Volt., Over-Current, Over-Power, Over-Temp.
Cabinet Dim. (HxWxD)	19" x 6.97" (4U) x 37.35" (incl. rack mount tab)	Input Isolation UUT Input	500 VDC UUT Output to Chassis
Cabinet Weight	115 LBS	Isolation AC	2500 VDC Mains to Chassis & Mains to UUT Output
Operating Temp.	0 - 35°C full power	Compliance	Unintentional Islanding, IEC 61010-1, RoHS
Input Power	3 ϕ , 50 - 60 Hz, 380 VAC to 460 VAC @ 22 A. Output Power reduced below 360 VAC input		

** Voltage as measured at input terminals of Power Module. Note: Waveform Measurement up to 64k Samples at up to 1MegSamp/Sec