




INSPIRED INNOVATION

## ◆ PBC Burn-In Oven

Designed for multiple burn-in applications

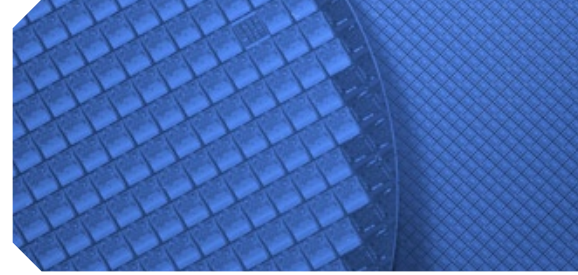

Despatch burn-in ovens are engineered specifically for applications such as high dissipation forward bias, high-temperature reverse bias, dynamic and static burn-in of IC, RAM, ROM, microprocessors and other semiconductor devices.

### FEATURES AT A GLANCE

- ◆ High volume recirculating fans maintain consistent, uniform temperatures required by MIL STD 883D while removing heat generated by the load.
- ◆ Rear wall is easily disassembled and removed to simplify fixturing of power leads or feed-through boards into oven.
- ◆ Traditional horizontal loading. Side to side horizontal airflow provides uniform atmosphere flow across horizontally positioned loads.
- ◆ Over-temperature protection control monitors maximum temperature and shuts off heater if setpoint is exceeded.
- ◆ Easy-to-use temperature controller featuring user-friendly arrow buttons for changing setpoints. The controller also contains programmable EZ-Keys enabling simple one-touch operation of repetitive user activities.
- ◆ Controller communication includes EIA 232/485 Modbus® RTU and supports network connectivity to a PC or PLC.

### MODEL OPTIONS

- ◆ Three sizes: 8, 18 or 32 cu ft (226.5, 510 or 906 liter)
- ◆ Maximum temperature of 260°C (500°F)
- ◆ High Dissipation Capacity





## OPTIONS

- ◆ Power supply cabinet is a standard E.I.A. 19" (48 cm) cabinet and aesthetically matches the oven. 78" (198 cm) usable opening height.
- ◆ Increased dissipation allows increase in live load capacity without risking over temperature.
- ◆ Circular chart recorder provides seven-day permanent record of process temperatures.
- ◆ Automatic damper controls amount of incoming fresh air while saving energy.
- ◆ Rapid cool-down provides faster cycle times.
- ◆ Back up/Redundant Hi-Limit to provide temperature protection in the event the primary device fails.
- ◆ Door switch to de-energize the heater and fan when the chamber access door is opened.
- ◆ Access port at rear of oven for test connections.
- ◆ Casters on bottom of unit for mobility.

BURN-IN OVENS	PBC1-80	PBC2-18	PBC2-32
SPECIFICATIONS			
Atmosphere	Air	Air	Air
Capacity in cubic feet (liters)	8 (226.5)	18 (510)	32 (906)
Electrical	208, 230, 460/3/60 220, 380, 415/3/50	208, 230, 460/3/60 220, 380, 415/3/50	208, 230, 460/3/60 220, 380, 415/3/50
Time to temperature (25°C-125°C)	17 min.	6 min.	20 min.
Recovery time to 125°C (door open 1 min.)	3 min.	1 min.	3 min.
Temperature uniformity @ 125°C (empty oven)	±1°C	±1°C	±1°C
Operating range <sup>1</sup>	50°C - 260°C	50°C - 260°C	50°C - 260°C
Recirculating fan (CFM)	1000 (472 LPS)	2600 (1227 LPS) (3200 option (1510 LPS))	2600 (1227 LPS) (3200 option (1510 LPS))
Recirculating fan motor (HP)	1	3 (5 option)	3 (5 option)
Heater (kW)	6	12	16
Maximum dissipation <sup>2,3</sup> @ 125°C	2500 watts	6500 watts (7500 option)	6500 watts (7500 option)
Exhaust outlet diameter	8 in (20.3 cm)	8 in (20.3 cm)	8 in (20.3 cm)
Approximate chamber dimensions	24 x 24 x 24 in 61 x 61 x 61 cm	26 x 24 x 48 in 66 x 61 x 122 cm	48 x 24 x 48 in 122 x 61 x 122 cm
Outside dimensions	38 x 35 x 87 in 97 x 89 x 221 cm	45 x 35 x 87 in 114 x 89 x 221 cm	67 x 35 x 87 in 170 x 89 x 221 cm
Shipping weight (lbs/kg)	800 lbs / 363 kg	1425 lbs / 646 kg	1850 lbs / 839 kg

### Notes:

<sup>1</sup> Assumes ambient of 25°C. Minimum temperature will be slightly higher with increased recirculating fan option.

<sup>2</sup> Dissipation is reduced by 17% on 50 Hz. (Option available for full rated dissipation).

<sup>3</sup> Live load evenly distributed provides maximum of 6°C mean temperature gradient.

## SERVICE AND TECHNICAL SUPPORT

**service parts:** 1-800-473-7373

**international service/main:** 1-952-469-8230

**service fax:** 1-952-469-8193

service@despatch.com

## GLOBAL HEADQUARTERS

**phone:** 1-888-DESPATCH (1-888-337-7282)

**international/main:** 1-952-469-5424

**fax:** 1-952-469-4513

sales@despatch.com

www.despatch.com

8860 207th Street West

Minneapolis, MN 55044 USA