

GUIDELINEGEO

MALÅ ConcreteExplorer


GROUND PENETRATING RADAR

Cost efficient investigation of concrete structures

MALÅ ConcreteExplorer (CX) system is an easy-to-use GPR system designed for the non-destructive investigation and imaging of concrete and other man-made structures.

MALÅ CX Control Unit

Pulse repetition frequency	100 kHz
Data output resolution	16 bits
Time stability	Better or equal than 60 ps
Sampling frequency	6-700 GHz
Acquisition mode	Distance/time/manual, grid measurements are controlled by remote controls on antenna/handle, with audio response
Time Window	0-70 ns
Power supply	External 12 V DC battery, AC/DC agg. Input 100-240 AC Output 13.2 V DC / 4.5 A
Operating time	6 hours
Charger	Quick charger, automatic charge cycle 100-240 V AC input
Charge time	3-5 h (80-100%)
Input device	Combined turn-push button
Screen	Transreflective 10.4" (CX11), weather resistant (IP 65)
Antenna compatibility	MALÅ High frequency series: 1.2 GHz, 1.2 GHz + EM, 1.6 GHz, 1.6 GHz + EM, 2.3 GHz
Dimension	410 x 210 x 55 mm + protruding details 40 mm
Weight	3.5 kg
Operating temperature	- 20°C to + 50°C (- 4°F to + 122°F)
Environmental	IP 65
Data download	USB 2.0
Data memory	1 GB

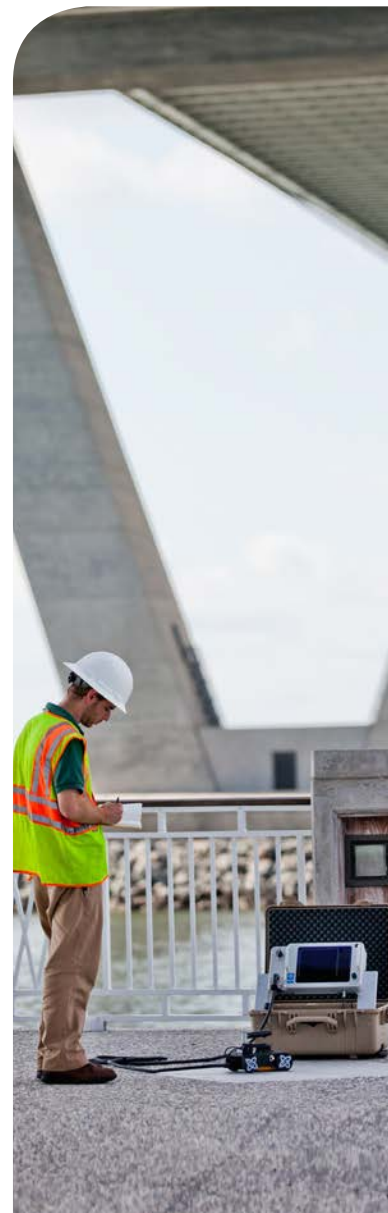

MALÅ High-Frequency (HF) Antennas

Centre frequency	1.2, 1.6 or 2.3 GHz
Bandwidth	> 100 %
Time window	> 50 ns
Repetition rate	100 kHz
EM option	50 Hz or 50/60 Hz sensors (sensitivity 300 uV, 14 bits) (1.2 and 1.6 GHz only)
Dimension	160 x 90 x 110 mm (1.6 GHz and 2.3 GHz) and 190 x 115 x 110 mm (1.2 GHz, 1.6 GHz + EM and 1.2 GHz + EM)
Weight	0.6 kg: 1.6 GHz and 2.3 GHz 1.0 kg: 1.2 GHz 1.2 kg: 1.6 GHz + EM and 1.2 GHz + EM
Cable length	4 m (can be customized)
Operating time	3 hours (with 12V battery)
Operating temperature	- 20° C to + 50° C
Control Unit	MALÅ CX or MALÅ ProEx control units
Data acquisition	MALÅ CX or MALÅ XV Monitor or other laptop with MALÅ GroundVision 2 software
Environmental	IP 65
Options	MALÅ HF cart, single wheel encoder, Extension handle, 7 m extension cable, split box for tomography applications



ABEM | MALÅ World Leading Brands

Guideline Geo is a world-leader in geophysics and geo-technology offering sensors, software, services and support necessary to map and visualize the subsurface. Guideline Geo operates in four international market areas: Infrastructure – examination at start-up and maintenance of infrastructure, Environment – survey of environmental risks and geological hazards, Water – mapping and survey of water supplies and Minerals – efficient exploration. Our offices and regional partners serve clients in 121 countries. The Guideline Geo AB share (GGEO) is listed on NGM Equity.

GUIDELINE GEO

GUIDELINE GEO
Löfströms Allé 6A
SE-172 66 Sundbyberg, Sweden
Tel: +46 8 557 613 00
info@guidelinegeo.com
www.guidelinegeo.com

MALÅ GEOSCIENCE
Skolgatan 11
SE-930 70 Malå, Sweden
Tel: +46 953 345 50
sales@guidelinegeo.com
www.guidelinegeo.com

ABEM INSTRUMENT
Löfströms Allé 6A
SE-172 66 Sundbyberg, Sweden
Tel: +46 8 564 883 00
sales@guidelinegeo.com
www.guidelinegeo.com

MALÅ GEOSCIENCE USA
465 Deanna Lane
Charleston 29492, USA
Tel: +1 843 852 5021
sales@guidelinegeo.com
www.guidelinegeo.com