



L2-16B

Two Lines Single Phase V-Network
9 kHz - 30 MHz, 16 A for AC and DC powered EUT



Provided Features

- Powering the EUT
- EUT termination to a standardized impedance respect to the reference ground
- Coupling of the measuring receiver to the disturbance generated by the EUT
- Decoupling of the measuring receiver from unwanted RF signals from the power line

Main Features

- 9 kHz to 30 MHz frequency range
- Up to 16A continuous rated output current
- Suitable for DC to 60 Hz power lines
- Built-in, selectable 150 kHz high pass filter
- Artificial Hand circuit
- Local and remote control from PMM EMI receivers
- Meets the requirements of several standards including CISPR 16-1-2, VDE 0876, FCC part 15, MIL-STD 461F

The AMN - Artificial Mains Network, also known as LISN - Line Impedance Stabilization Network - is the ancillary device intended for repeatable and accurate measurement of the disturbance voltage that an EUT (Equipment Under Test) may inject into the power line or mains.

This is obtained by providing well known impedance value and phase response across the frequency range of the test.

PMM L2-16B is suitable for measurement on AC single phase and DC power circuits from DC to 60 Hz. The equivalent V-Network circuit of $50 \Omega // (5 \Omega + 50 \mu\text{H})$ with $250 \mu\text{H}$ choke is fully compliant with the reference standards.

PMM Artificial Mains Networks provide robust and stable mechanical construction, high quality electric components, easy and perfect grounding, solid input-output power connections. They can be used in conjunction with any EMI receiver or spectrum analyzer and offer features required for safe, repeatable and accurate measurements.

L2-16B

Two Lines Single Phase V-Network 9 kHz - 30 MHz, 16 A for AC and DC powered EUT

SPECIFICATIONS

Frequency range	9 kHz - 30 MHz
Continuous rated output current	16 A
Maximum permissible operating voltage (L/N) L/PE)	250 VAC 350 VDC
AC supply frequency range	DC - 60 Hz
Equivalent circuit	50 Ω // [5 Ω + 50 μH] with 250μH choke
RF output	BNC female
Test item	SCHUKO connector
Rated temperature	-10 °C to +45 °C
Storage temperature	-25 °C to +75 °C
Overall Dimensions mm (W x H x D)	230 x 105 x 285 mm
Weight	5,5 kg




Ordering Information:

L2-16B single phase Artificial Mains Network **Includes:** power supply cable, RF cable, LISN remote control cable, user's manual, calibration certificate.

Optional accessories:

LISN service kit
(AC-BNC adapter for LISN verification and calibration)

- Electrical safety and presence of ground protection relays do require the installation of properly rated insulating transformer(s) between mains power line and AMN line inputs.
- High mains noise may require the installation of properly rated mains filters to reduce the level of unwanted signals.

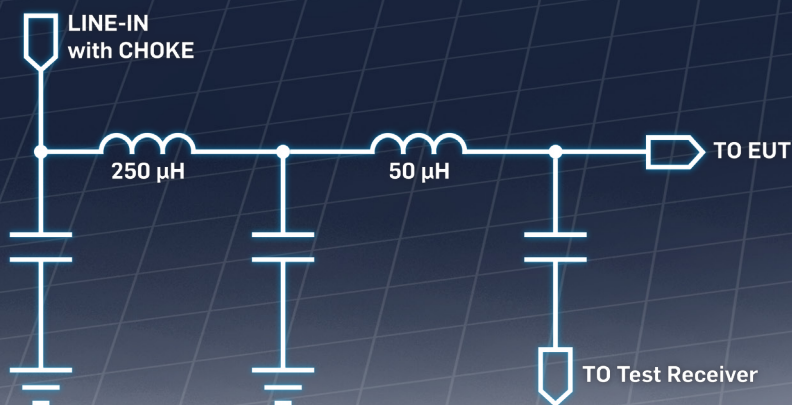

L2-16B equivalent circuit

Related Products

Receivers

- 7010: EMI receiver 150 kHz -1 GHz
- 9010: EMI receiver 10 Hz - 30 MHz
- 9010F: EMI receiver 10 Hz - 30 MHz
- 9010/03P: EMI receiver 10 Hz - 300 MHz
- 9010/30P: EMI receiver 10 Hz - 3 GHz
- 9010/60P: EMI receiver 10 Hz - 6 GHz

LISN

- L3-32: 4 lines, 3-phase AMN, 32 A
- L3-64: 4 lines, 3-phase AMN, 64 A
- L3-64/690 4 lines, 3-phase AMN, 64A/690V
- L3-100: 4 lines, 3-phase AMN, 100 A
- L3-500: 4 lines, 3-phase AMN, 350 A
- L1-150M: single-path, 50 Ohm etc AMN 150 A
- L1-500 Single phase AMN, 500A
- L2-D: Delta LISN for telecom, 2 A, 150 Ω

RFI Filters

- FIL-L2-16F: single phase RFI filter, 16 A
- FIL-L2-24M: single phase RFI filter, 24 A
- FIL-L3-32M: 3-phase+neutral RFI filter, 32 A
- FIL-L3-70M: 3-phase+neutral RFI filter, 70 A



Narda Safety Test Solutions Srl
Via Leonardo da Vinci, 21/23
20090 Segrate (Milano) - ITALY
Phone: +39 02 2699871
Fax: +39 02 26998700
E-Mail: support@narda-sts.it
Internet: www.narda-sts.it