




## Model 101H Temperature/Humidity Chamber Specifications

Effective for models shipped after December 10, 2018 with external water recirculation system.

<b>Temperature Range (uncontrolled humidity)</b>	-30°C to +130°C
<b>Temperature Control Tolerance</b>	±0.5°C (Short-term variations measured at the control sensor after stabilization)
<b>Temperature Uniformity</b>	±1.0°C (Variations throughout the chamber after stabilization, at least 2-inches from the walls, in the range of -25°C to +100°C)
<b>Temperature Sensor</b>	Platinum RTD sensor
<b>Humidity Range</b>	<p><b>Standard Range:</b> 10% to 95% RH Limited by a 6°C Dew Point within the range of +10°C to +85°C chamber temperature</p> <p><b>With GN2 Purge or optional Dry Air Purge:</b> 5% to 95% RH Within the range of +10°C to +85°C chamber temperature</p>

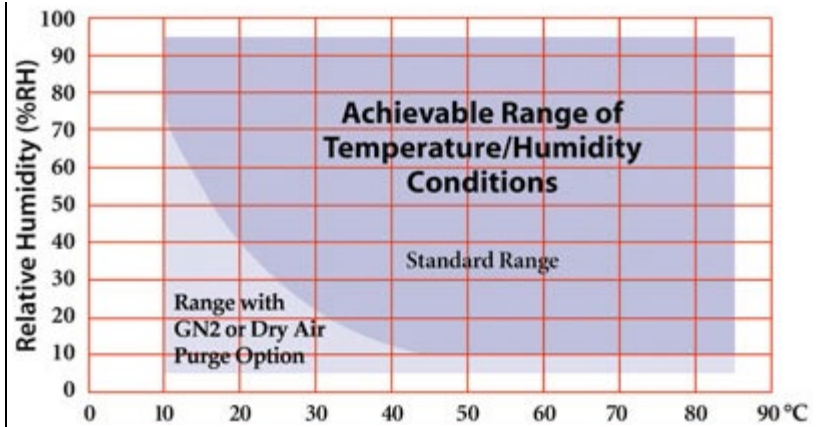

NOTE: Ability to reach RH extremes may be limited by the humidity sensor accuracy. Low Dew Point conditions can only be achieved when starting with a clean, dry chamber.

<b>Humidity Control Tolerance</b>	±3% RH (Short-term variations measured at the control sensor after stabilization)
<b>Humidity Sensor</b>	Dynamic capacitive type, Vaisala HMM100 with Stainless Steel Body (no wet wicks used)
<b>Temperature/Humidity Controller</b>	F4T Touch Screen Controller, Integrated Limit Control with independent sensor; Ethernet Modbus TCP and RS-232 Modbus RTU interfaces; USB host port for transfer via flash drive of data log files, profile configuration files, and controller configuration files.
<b>Safety Limit Controller</b>	Independent thermocouple sensor, integrated into the F4T controller, FM approved. User settable high and low temperature limits. Chamber turns off when limits are exceeded. A thermal fuse provides backup overtemperature protection.
<b>Heat Up Transition Time (empty)*</b>	4.8°C/minute from -25°C to +85°C

<b>Cool Down Transition Time (empty)*</b>	<b>End Temperature</b>					
	<b>+23°C</b>	<b>0°C</b>	<b>-10°C</b>	<b>-20°C</b>	<b>-25°C</b>	<b>-30°C</b>
<b>Start Temperature</b>						
<b>+125°C</b>	15 min	22 min	28 min	38 min	47 min	Ultimate
<b>+85°C</b>	9 min	15 min	21 min	29 min	38 min	Ultimate
<b>+23°C</b>	--	6 min	10 min	18 min	26 min	Ultimate

\*Note: Transition times are measured after a 30 minute soak at the respective start temperature with an empty chamber, as indicated on the temperature controller, 23°C ambient. Measured with set point beyond the start and end temperatures. Does not include the effect of proportional band when approaching set point. For 101H-EX: Transition times and live load capacity are reduced by 17% with 50 Hz input power.

<b>Live Load Capacity (Uncontrolled Humidity)</b>	<b>+23°C</b>	<b>0°C</b>	<b>-10°C</b>	<b>-15°C</b>	<b>-20°C</b>	<b>-25°C</b>
		440 W	290 W	190 W	150 W	100 W

**Inside Dimensions**  
13.8"W x 11.8"H x 11.8"D, 1.1 cubic feet  
350W x 300D x 300H mm, 31 liters

**Benchtop Model 101H-B**  
23.25"W x 36"H x 28.7"D (nominal)  
590.6W x 914.4H x 730D mm  
Net weight: 200 pounds. Shipping weight (North America version):

<b>Outside Dimensions and Weight</b>	280 pounds.  <b>Floor-Standing Model 101H-F</b> 23.25"W x 62.3"H x 28.7"D (nominal) 590.6W x 1582H x 730D mm Net weight: 250 pounds. Shipping weight (North America version): 330 pounds.
<b>Minimum Installed Clearance</b>	12" (304mm) from the rear Full access to left side is required for maintenance when draining the internal water tank and changing the water filter.
<b>Access Ports</b>	3" (2.83" inside diameter) Port on left and right side (two total) Supplied with silicone foam plugs
<b>Sound Level</b>	66 dBA in cooling mode (A-weighted, measured 36" from the front surface, 63" from the floor, in a free-standing environment)
<b>Air Flow</b>	100 SCFM
<b>Heater Power</b>	250 Watts
<b>Cooling System</b>	1/4 HP Copeland hermetic compressor
<b>Heat of Rejection (heat load in the room)</b>	3000 BTUH (Maximum rated chamber load at maximum cooling rate from high temperature soak.)
<b>Water Requirement</b>	Supplied water recirculation system must be filled with clean tap water only.  May be plumbed to a source of Single-Distilled or De-Ionized Water, maximum 50 psi (requires optional Inlet Solenoid Valve Assembly). Negligible water consumption.
<b>Input Power</b>	<b>North America Version (101H-B, 101H-F)</b> 120 V nominal (110 to 126 VAC), 60 Hz, 1 PH Max Current Draw 12 A, Recommended Minimum Service 15 A  <b>Export Version (101H-EX-B, 101H-EX-F)</b> 230 V nominal (209 to 253 VAC), 50 Hz, 1 PH Max Current Draw 6 A, Recommended Minimum Service 8 A Temperature transition times and live load capacity are reduced by 17% with 50 Hz input power.

**NOTE:** Performance is typical and based on operation at 23°C (73°F) ambient and nominal input voltage. This product is designed for use in a normal conditioned laboratory. Operation at higher ambient temperatures will result in decreased cooling performance. Operation above 27°C (80°F) will have a significant impact on low-temperature operation.

Effective for models shipped after December 10, 2018 with external water recirculation system.

**Due to continuous product improvement, specifications are subject to change without notice.**