



**Advanced Test Equipment Corp.**

*Rentals • Sales • Calibration • Service*

# Julabo

## VALEGRO™

Recirculating Coolers



## VALEGRO 350 Recirculating cooler

The VALEGRO 350 recirculating cooler with a working temperature range -20 ... +40 °C offers, in relation to its very compact design, a strong cooling capacity of 0.35 kW at 20 °C. The integrated pump generates a pump pressure up to 8.7 psi. It is also infinitely adjustable and can be ideally adapted to the requirements of the customer application.

The modern units offer precise temperature control for a wide range of applications in laboratories, industry and research and fit seamlessly into any working environment thanks to their compact design. The refrigeration circuit works with an environmentally-friendly, natural refrigerant. When designing the VALEGRO recirculating coolers, the focus was on maximum user-friendliness. Many helpful features such as a timer function, a removable venting grid that can be removed without tools or an illuminated and simple to clean level indicator make daily work easier. The inclined OLED touch display is easy to read and ergonomic to operate. The intuitive menu navigation provides simple and quick access to all functions. Warnings and messages in easy-to-understand full-text language ensure safe handling of the units at all times. In addition to RS232 and USB-C interfaces, the VALEGRO recirculating coolers are also available with Ethernet (optional). All interfaces are located directly under the display and are easy to use from the front.



### Product features


- Precise temperature stability of  $\pm 0.3$  °C
- Adjustable pump for regulating pressure and flow rate
- Removable venting grid without tools
- Integrated castors for good handling on and under the lab bench
- Simple timer function
- Autostart function
- Data recording
- Intuitive menu navigation in full text German/English
- User-friendly operation thanks to comprehensive help texts
- Adjusting the screen brightness

### Available options


#### Interface

- Ethernet

### Pump capacity

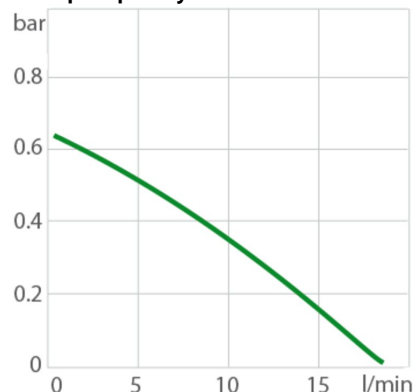


### Heat-up time

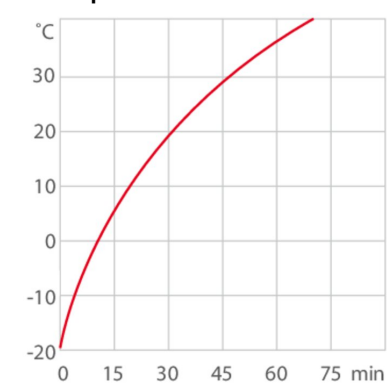

Medium: Thermal G

### Cool-down time

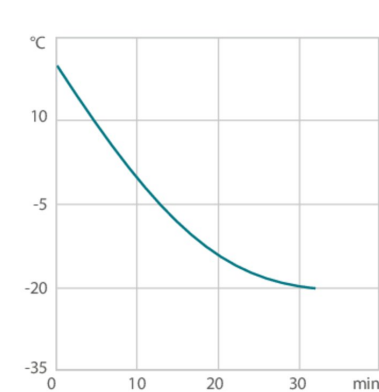

Medium: Ethanol

## Performance values

<b>200V/60Hz (Schuko Plug - CEE 7/4 Plug Type F)</b>	
Viscosity max. cSt	50
Pump capacity flow pressure l/min	16
Pump capacity pressure psi	8.7
Power consumption A	3

Order number including voltage version	9610035.30003787			
<b>Cooling capacity 2 (Ethanol)</b>				
°C	20	0	-10	-20
kW <sup>1</sup>	0.35	0.25	0.18	0.07
<b>Refrigerant stage 1</b>				
Refrigerant	R290			
Filling weight g	37			
Global Warming Potential for R290	3			
Carbon dioxide equivalent t	0.000111			

<sup>1</sup> Performance specifications measured in accordance with DIN 12876. Cooling capacities up to 20 °C measured with ethanol; over 20 °C with thermal oil unless otherwise specified. Performance specifications apply at an ambient temperature of 20 °C. Performance values may differ with other bath fluids.

## Technical data

<b>Available voltage versions</b>		<b>Cooling</b>	
Order No.	9610035	Cooling of compressor	1-stage Air
<b>Available voltage versions:</b>			
9610035.30003785	100V/50-60Hz (Nema N5-15 Plug) (R290)		
9610035.30003786	115V/60Hz (Nema N5-15 Plug) (R290)		
9610035.30003787	200-230V/50-60Hz (Schuko Plug - CEE 7/4 Plug Type F) (R290)		
9610035.30003788	230V/50Hz (UK Plug Type BS1363A) (R290)		

9610035.30003789	230V/50-60Hz (CH Plug Type SEV 1011) (R290)
9610035.30003790	200-230V/50-60Hz (CN Plug) (R290)

### Bath

Bath tank	Stainless steel
-----------	-----------------

### Other

Sound pressure level dbA	52
Classification	Classification I (NFL)
Standards	CE, RoHs
Alarm notification	Acoustic, Optical
IP Code	IP 21
Pump function	Pressure Pump
Pump type	Centrifugal Pump
User Interface Language	English, German

### Electronics

Interfaces	Ethernet optional, RS232, USB
Temperature control	PID1
Temperature display	OLED
Temperature setting	Touchscreen
Electronic Timer h:min	99 ... 59

### Dimensions and volumes

Weight lbs	57.3
Barbed fittings inner diameter mm	8/12 mm
Total dimensions in. (W x L x H)	9.1 x 17.7 x 17.7
Filling volume l	1.5 ... 3
Pump connections	M16x1 male

### Temperature values

Return flow temperature max. °C	+85
Working temperature range °C	-20 ... +40
Temperature stability °C	±0.3
Ambient temperature °C	+5 ... +40
Temperature display resolution °C	0.1

## VALEGRO 500 Recirculating cooler

The VALEGRO 500 recirculating cooler with a working temperature range -20 ... +40 °C offers, in relation to its very compact design, a strong cooling capacity of 0.5 kW at 20 °C. The integrated pump generates a pump pressure up to 12.3 psi. It is also infinitely adjustable and can be ideally adapted to the requirements of the customer application.

The modern units offer precise temperature control for a wide range of applications in laboratories, industry and research and fit seamlessly into any working environment thanks to their compact design. The refrigeration circuit works with an environmentally-friendly, natural refrigerant. When designing the VALEGRO recirculating coolers, the focus was on maximum user-friendliness. Many helpful features such as a timer function, a removable venting grid that can be removed without tools or an illuminated and simple to clean level indicator make daily work easier. The inclined OLED touch display is easy to read and ergonomic to operate. The intuitive menu navigation provides simple and quick access to all functions. Warnings and messages in easy-to-understand full-text language ensure safe handling of the units at all times. In addition to RS232 and USB-C interfaces, the VALEGRO recirculating coolers are also available with Ethernet (optional). All interfaces are located directly under the display and are easy to use from the front.



### Product features


- Precise temperature stability of  $\pm 0.3$  °C
- Adjustable pump for regulating pressure and flow rate
- Removable venting grid without tools
- Integrated castors for good handling on and under the lab bench
- Simple timer function
- Autostart function
- Data recording
- Intuitive menu navigation in full text German/English
- User-friendly operation thanks to comprehensive help texts
- Adjusting the screen brightness

### Available options


#### Interface

- Ethernet


### Pump capacity

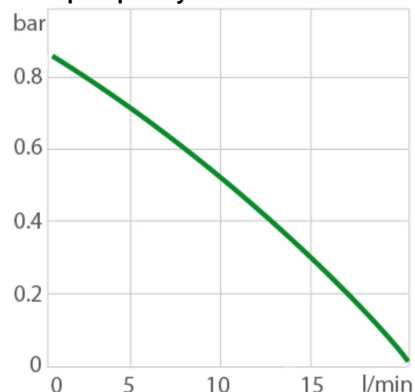

### Heat-up time

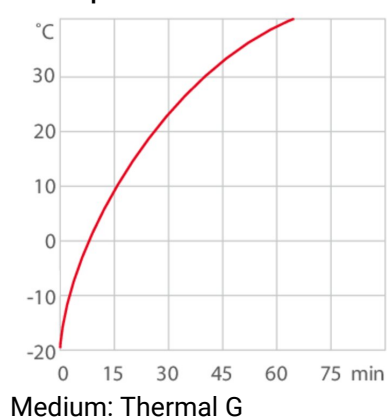

### Cool-down time

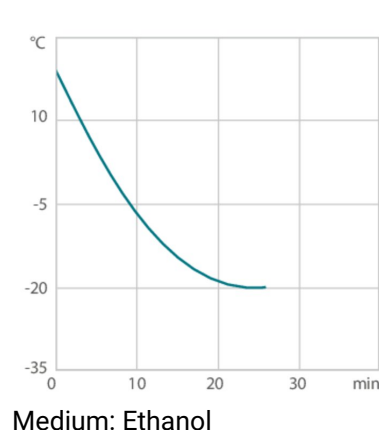

## Performance values

<b>200V/60Hz (Schuko Plug - CEE 7/4 Plug Type F)</b>	
Viscosity max. cSt	50
Pump capacity flow pressure l/min	19
Pump capacity pressure psi	12.3
Power consumption A	3

Order number including voltage version **9610050.30003283**

#### Cooling capacity 2 (Ethanol)

°C	20	0	-10	-20
kW <sup>1</sup>	0.5	0.37	0.25	0.1

#### Refrigerant stage 1

Refrigerant	R290
Filling weight g	50
Global Warming Potential for R290	3
Carbon dioxide equivalent t	0.00015

<sup>1</sup> Performance specifications measured in accordance with DIN 12876. Cooling capacities up to 20 °C measured with ethanol; over 20 °C with thermal oil unless otherwise specified. Performance specifications apply at an ambient temperature of 20 °C. Performance values may differ with other bath fluids.

## Technical data

### Available voltage versions

Order No.	9610050
Available voltage versions:	
9610050.30003285	100V/50-60Hz (Nema N5-15 Plug) (R290)
9610050.30003284	115V/60Hz (Nema N5-15 Plug) (R290)
9610050.30003283	200-230V/50-60Hz (Schuko Plug - CEE 7/4 Plug Type F) (R290)
9610050.30003286	230V/50Hz (UK Plug Type BS1363A) (R290)

### Cooling

Cooling of compressor	1-stage Air
-----------------------	-------------

9610050.30003287	230V/50-60Hz (CH Plug Type SEV 1011) (R290)
9610050.30003288	200-230V/50-60Hz (CN Plug) (R290)

### Bath

Bath tank	Stainless steel
-----------	-----------------

### Other

Sound pressure level dbA	55
Classification	Classification I (NFL)
Standards	CE, RoHs
Alarm notification	Acoustic, Optical
IP Code	IP 21
Pump function	Pressure Pump
Pump type	Centrifugal Pump
User Interface Language	English, German

### Electronics

Interfaces	Ethernet optional, RS232, USB
Temperature control	PID1
Temperature display	OLED
Temperature setting	Touchscreen
Electronic Timer h:min	99 ... 59

### Dimensions and volumes

Weight lbs	57.3
Barbed fittings inner diameter mm	8/12 mm
Total dimensions in. (W x L x H)	9.1 x 17.7 x 17.7
Filling volume l	1.5 ... 3
Pump connections	M16x1 male

### Temperature values

Return flow temperature max. °C	+85
Working temperature range °C	-20 ... +40
Temperature stability °C	±0.3
Ambient temperature °C	+5 ... +40
Temperature display resolution °C	0.1




## Product data sheet

# VALEGRO 1201 Recirculating cooler

Modern, user-friendly chillers for a wide range of cooling tasks

The air-cooled VALEGRO recirculating coolers are environmentally friendly all-rounders for a wide range of cooling and heating tasks from -20 to +40 °C. The pump can be user-friendly adjusted in different pump stages on a percentage basis.

Whether in the laboratory, research, or production, the VALEGRO 1201 recirculating coolers offer a constant cooling capacity of 1.2 kW at 20 °C, supporting stable processes around the clock. These modern devices offer precise temperature control for a wide range of applications and, thanks to their compact design, fit seamlessly into any working environment. The refrigeration circuit uses an eco-friendly, natural refrigerant. When designing the VALEGRO recirculating coolers, the focus was on maximum user-friendliness. Many helpful features such as a timer function, a removable venting grid that can be removed without tools, and an illuminated and simple to clean level indicator make daily work easier. The inclined OLED touch display is easy to read and ergonomic to use. The intuitive menu navigation allows quick access to all functions. Warning notices and system messages are displayed in clear, understandable language, ensuring maximum safety when using the device. In addition to RS232 and USB-C interfaces, VALEGRO recirculating coolers are also available with Ethernet (optional). All interfaces are located directly below the display and are easy to use from the front.




### Product Features

- ✓ User-friendly operation thanks to comprehensive help texts
- ✓ Intuitive menu navigation in full text German/English
- ✓ Data recording
- ✓ Autostart function
- ✓ Simple timer function
- ✓ Removable venting grid without tools
- ✓ Precise temperature stability of  $\pm 0.3$  °C
- ✓ Casters for easy handling

## Available options

### Interfaces

Ethernet  
VALEGRO Ethernet activation



### Performance values

115V/60Hz (Multiple Plugs (EU / US))	
Viscosity max. cSt	50
Pump capacity flow pressure l/min	15 ... 23
Pump capacity pressure psi	7.3 ... 16
Power consumption A	7
Voltage Tolerance %	115V   ±10

Order number including voltage version (115V/60Hz) 9610121.30005627

Cooling capacity 1 (Ethanol)

°C	20	0	-10	-20
kW <sup>1</sup>	1.2	0.9	0.6	0.35

Note about natural refrigerants:  
Temperature control units using natural refrigerants are often subject to regulatory requirements regarding the installation site, operation, transport or disposal of the units. If you have any questions, we will be happy to advise you.

Refrigerant stage 1

Refrigerant	R290
Filling weight g	80
Global Warming Potential for R290	3
Carbon dioxide equivalent t	0.00024

<sup>1</sup> Performance specifications measured in accordance with DIN 12876. Cooling capacities up to 20 °C measured with ethanol; over 20 °C with thermal oil unless otherwise specified. Performance specifications apply at an ambient temperature of 20 °C. Performance values may differ with other bath fluids.

## Technical data

### Available voltage versions

Order No. 9610121

### Available voltage versions:

9610121.30005627 100-230V 50/60Hz (Multiple Plugs (EU / US)) (R290)

9610121.30005628 100-230V 50/60Hz (UK Plug Type BS1363A) (R290)

9610121.30005629 100-230V 50/60Hz (Multiple Plugs (EU / CH)) (R290)

9610121.30005630 100-230V 50/60Hz (CN Plug) (R290)

### Cooling

Cooling of compressor 1-stage Air

### Bath

Bath tank Stainless steel

### Electronics

Interfaces Ethernet optional, RS232, USB

Temperature control PID1

Temperature display OLED

Temperature setting Touchscreen

Electronic Timer h:min 99 ... 59

### Dimensions and volumes

Weight lbs 94.8

Barbed fittings inner diameter mm 8/12 mm

Total dimensions in. (W × L × H) 14.4 x 20.7 x 24

Body dimensions in. (W × L × H) 14.4 x 18.7 x 23.6

Filling volume l 4 ... 7

Pump connections M16x1 male

### Temperature values

Return flow temperature max. °C +85

Working temperature range °C -20 ... +40

Temperature stability °C ±0.3

Ambient temperature °C +5 ... +40

Temperature display resolution °C 0.1

### Other

Classification Classification I (NFL)

Standards CE, RoHs

Alarm notification Acoustic, Optical

IP Code IP 21

Pump function Pressure Pump

Pump type Centrifugal Pump

User Interface Language English, German

Sound pressure level dbA<sup>2</sup> 42 ... 51

<sup>2</sup> The sound pressure level may increase as the ambient temperature rises.