

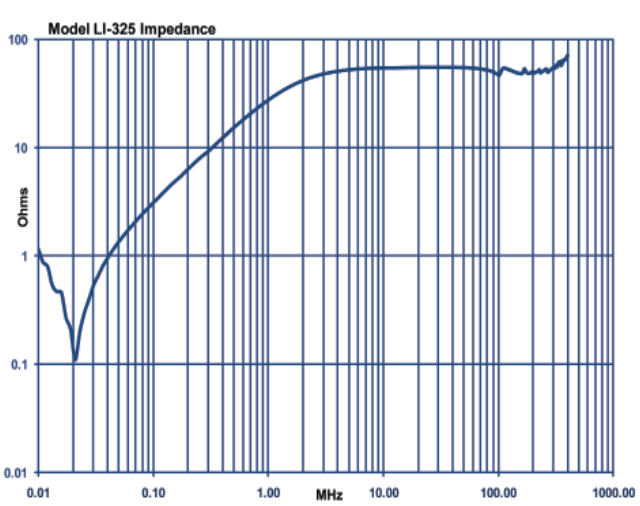
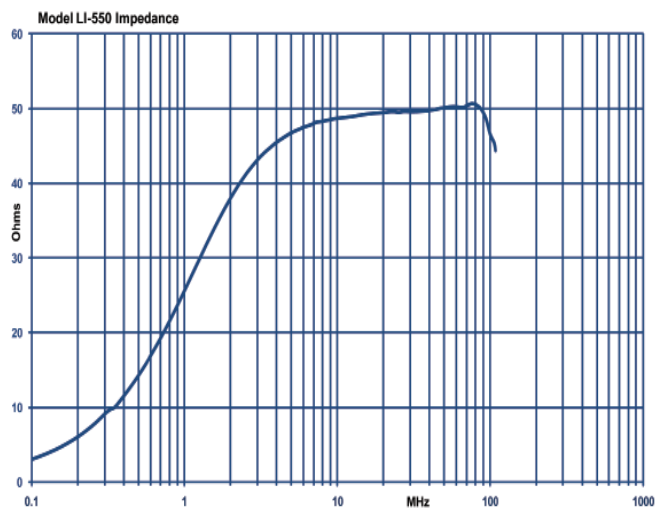


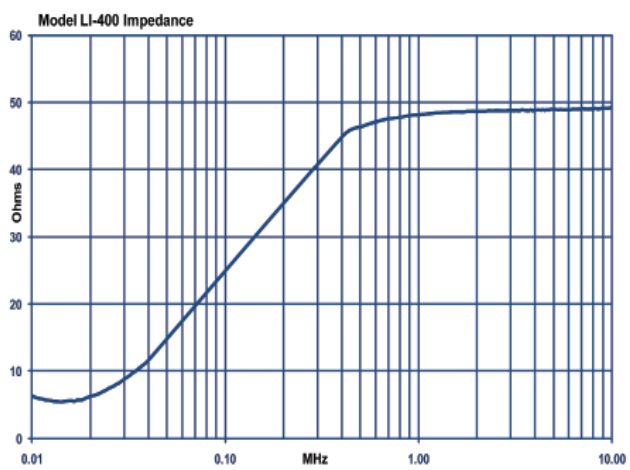

## Specification

Model	LI-125	LI-150	LI-325	LI-400	LI-550
Frequency	150 kHz - 30 MHz	150 kHz - 30 MHz	10 kHz - 400 MHz	10 kHz - 10 MHz	100 kHz - 108 MHz
Lines	2	2	2	2	2
Max (current)	25 A	50 A	25 A	25 A	50 A
Max (voltage)	270 VAC / 380 VDC	270 VAC / 380 VDC	270 VAC / 380 VDC	270 VAC / 380 VDC	270 VAC / 380 VDC
Power Frequency	60 / 50 Hz	60 / 50 Hz	DC- 400 Hz	DC-400 Hz	50 / 60 Hz
Inductor	50μH Air Core	50μH Air Core	5μH Air Core	50μH Air Core	5μH Air Core
RF connector	50Ω N (f)	50Ω N (f)	50Ω N (f)	50Ω N (f)	50Ω N (f)
I/O Connectors	Superior © Plug	Superior © Plug	Superior © Plug	Superior © Plug	Superior © Plug
Weight	25 lbs / 11.3 kg	14 lbs / 6.3 kg	5 lbs / 2.2 kg	14 lbs / 6.3 kg	14 lbs. / 6.3 kg
Size	13 x 7 x 7 inches 33 x 17.7 x 17.7 cm	15 x 10 x 10 inches 38 x 25.4 x 25.4 cm	13 x 7.5 x 8 inches 33 x 19 x 20 cm	13 x 7 x 7 inches 33 x 17.7 x 17.7 cm	13 x 7 x 7 inches 33 x 17.7 x 17.7 cm

## Typical Impedance

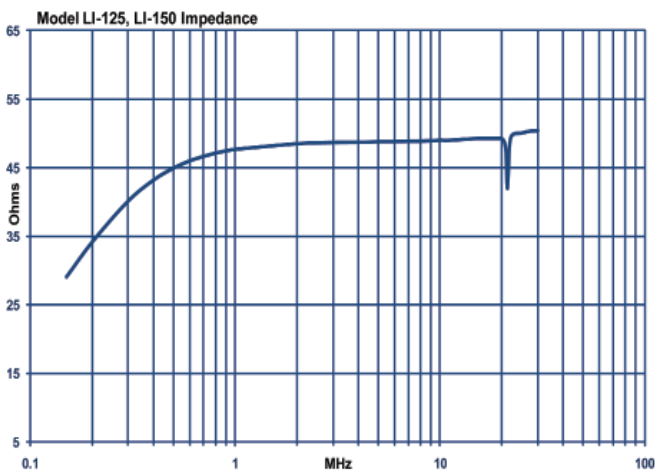

Specifications are subject to change without notice.  
All values are typical unless specified