



Advanced Test Equipment Corp.  
www.atecorp.com 800-404-ATEC (2832)

thermoscientific

PRODUCT SPECIFICATIONS


## Thermo Scientific 49iQ

Ozone Analyzer—UV Photometric



The Thermo Scientific™ 49iQ Ozone(O<sub>3</sub>) Analyzer utilizes UV Photometric technology to measure the amount of ozone in the air from ppb levels up to 200ppm.

The Thermo Scientific 49iQ Analyzer is a dual cell photometer, the concept adopted by NIST for the national ozone standard. Because the instrument has both sample and reference flowing at the same time, a response time of 20 seconds can be achieved. Dual range, auto range, temperature correction and pressure correction are standard features.

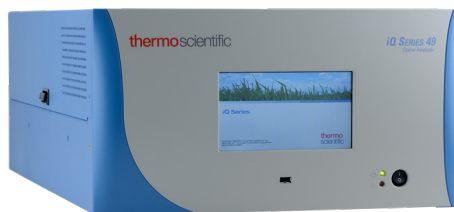

### Non-Stop Intelligence

- Predictive Diagnostics
- Proactive Communication
- Personal Device Connectivity

The Thermo Scientific iQ Series Gas Analyzer provides a smart environmental monitoring solution designed for reliability, easy operation and proactive maintenance. Get more control over your instrument's performance, costs, workflow and data availability.



The iQ companion app for the iQ Series Gas Analyzer delivers the ultimate in ease of use and smart engineering. The iQ app allows for remote monitoring of iQ gas analyzers, simplified ways of contacting us and instant access to product resources. Download the iQ app at [thermofisher.com/iQapp](http://thermofisher.com/iQapp)

**ThermoFisher**  
SCIENTIFIC

## Thermo Scientific 49iQ Ozone Analyzer

| Specifications               |                                                                                                                                                                 |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range                        | 0-200 ppm<br>0-400 mg/m <sup>3</sup>                                                                                                                            |
| Zero noise                   | 0.25 ppb RMS (60 second averaging time)                                                                                                                         |
| Detection limit              | 0.50 ppb (60 second averaging time)                                                                                                                             |
| Zero drift                   | <1.0 ppb (24 hour)<br><2.0 ppb (7 day)                                                                                                                          |
| Span drift                   | <1% full scale (1 month)                                                                                                                                        |
| Response time                | 20 seconds (10 second averaging time)                                                                                                                           |
| Precision                    | ±1.0 ppb                                                                                                                                                        |
| Linearity                    | ±1% full scale                                                                                                                                                  |
| Flow rate                    | 1-3 liters/min.                                                                                                                                                 |
| Operating temperature        | 0°-45°C.                                                                                                                                                        |
| Power requirements           | 100-240 VAC 50/60 Hz 200 Watts                                                                                                                                  |
| Size and weight              | 16.75" (W) × 8.72" (H) × 24" (D), 31.7 lbs std; 35.6 lbs w/ozonator<br>425.45 mm (W) × 221.48 mm (H) × 609 mm (D), 14.4 kg std; 16.1 kg w/ozonator              |
| Analog I/O                   | 4 Isolated voltage Inputs 0-10 V<br>6 Isolated analog voltages outputs, with 4 selectable ranges<br>6 Isolated analog current outputs, with 2 selectable ranges |
| Digital I/O                  | 16 Digital inputs (TTL)<br>8 Solenoid driver outputs<br>10 Digital reed relay contact outputs                                                                   |
| Serial ports                 | 1 RS-232/485 port; 1 RS-485 external accessory port                                                                                                             |
| Other ports                  | 3 Full speed USB ports (one in front, two in rear)<br>1 Gigabit ethernet port                                                                                   |
| Communications               | MODBUS, streaming                                                                                                                                               |
| Approvals and Certifications | CE, TUV-SUD Safety, US EPA: EQOA-0880-047                                                                                                                       |

## Ordering information

### 49iQ Ozone Analyzer

Choose from the following configurations/options to customize your own 49iQ Analyzer

#### 1. Power Cord

A = 100-120 VAC 50/60 Hz (NA)

B = 220 VAC 50/60 Hz (EU)

C = 220 VAC 50/60 Hz (CHN)

#### 2. Communications

N = No I/O

A = Serial RS232/RS485

B = Analog and Digital

C = Serial, Analog and Digital

#### 3. Internal Sample/Cal

N = No sample/Cal Valve

A = Internal Sample/Cal Valve

B = Internal Ozonator, Manifold, Sample/Cal Valve

C = Internal Ozonator, Sample/Cal & Zero/Ozone

#### 4. Zero air source:

N = No Zero Air Source

A = Zero air source

#### Your Order Code: 49iQ –

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

To maintain optimal product performance, you need immediate access to experts worldwide, as well as priority status when your air quality equipment needs repair or replacement. We offer comprehensive, flexible support solutions for all phases of the product life cycle. Through predictable, fixed-cost pricing, our services help protect the return on investment and total cost of ownership of your Thermo Scientific products. For more information on our comprehensive service solutions visit [thermofisher.com/EPMSservice](http://thermofisher.com/EPMSservice)

#### USA

27 Forge Parkway  
Franklin, MA 02038  
Ph: (866) 282-0430  
Fax: (508) 520-2800  
[orders.aqi@thermofisher.com](mailto:orders.aqi@thermofisher.com)

#### India

Industrial Unit No.101+130,  
Plot No.C-56/1, TTC Industrial  
area, MIDC-Turbhe,  
New Mumbai 400 703, India  
Ph: +91 82 9199 0337  
[INinfo@thermofisher.com](mailto:INinfo@thermofisher.com)

#### China

8/F Bldg C of Global Trade Ctr,  
No.36, North 3rd Ring Road,  
Dong Cheng District  
Beijing, China 100013  
Ph: +86 10 84193588  
[info.eid.china@thermofisher.com](mailto:info.eid.china@thermofisher.com)

#### Europe

Ion Path, Road Three,  
Winsford, Cheshire CW73GA UK  
Ph: +44 1606 548700  
Fax: +44 1606 548711  
[sales.epm.uk@thermofisher.com](mailto:sales.epm.uk@thermofisher.com)

Find out more at [thermofisher.com/49iQ](http://thermofisher.com/49iQ)  
[thermofisher.com/iQSeries](http://thermofisher.com/iQSeries)

**ThermoFisher**  
SCIENTIFIC