



Advanced Test Equipment Corp.
www.atecorp.com 800-404-ATEC (2832)

Julabo

THE TEMPERATURE CONTROL COMPANY

MAGIO™

Refrigerated and heating circulators



ENGLISH



MAGIO™. The best for your laboratory.

From research institutes to industrial companies, laboratories around the world need high performance circulators for challenging temperature applications. The high-end circulators in the MAGIO range have been specially developed by JULABO with pioneering technologies for these requirements and are manufactured to the highest quality standards in Germany.

With the MAGIO range we offer our customers high-end devices in the highest performance class for the working temperature range from -50 °C to +300 °C. On all models, the wetted parts are made from stainless steel. In combination with high-performance pumps, this makes the circulators particularly suitable for challenging external applications. The high resolution touch display guarantees simple, intuitive operation and optimal visibility of all relevant functions. Thanks to the proven JULABO premium quality, all models meet the highest standards in terms of precision, reliability, and functionality.

With a wide selection of accessories, all MAGIO instruments can be tailored to customer-specific applications in a modular and individual way. Modern interfaces and an integrated programmer complete the intelligent design of the MAGIO models.



MAGIO – the laboratory circulators

Advantages at a glance 4

Refrigerated circulators 6

Heating circulators 10

Accessories 16

Technical specifications 26




MAGIO.

The advantages at a glance.



Everything made of stainless steel.

The highest level of quality and material compatibility. All parts that come into contact with the medium are made of stainless steel.



Many interfaces.

Simple remote control, data management and integration into process structures. USB, RS232 and ethernet are permanently integrated.



Touch display. Perfect control.

A high resolution TFT touch display means that the operator always has an eye on all values and functions. The intuitive menu structure makes easy control possible.



Multilingual.

The complete menu navigation is available in multiple languages.




Maximum safety.

The classification III according to DIN12876-1 makes safe operation possible, even with flammable liquids. Automatic shut-off in case of high temperature or low liquid level.



Programmer. Integrated.

The integrated programmer allows automatic running of temperature time profiles.



Filling level. Monitored.

Level indicator of the bath medium on the display.



Versatile.

Refrigerated and heating circulators in various combinations and various sizes. Maximum flexibility thanks to a wide selection of accessories.



Energy-saving

The high-quality insulation of all relevant components saves energy.



Temperature. Under control.

External Pt100 sensor connection for highly precise measurement and control directly in the external application.





Powerful pump.

The integrated pressure/suction pump with performance values of 13.3 and -5.8 psi is the strongest in its class and is continuously adjustable.



Analog I/O.

Analog interfaces for integration into process control systems (accessories).



Process stability.

Early visual and acoustic notification of critical conditions increases process safety.



Process. Under control.

Full supervision of the control dynamics. Access to all important control parameters for individual process optimization.



ATC3. Calibration.

Absolute Temperature Calibration – compensation of a physically caused temperature difference, 3-point calibration.



Intelligent temperature control.

Intelligent Cascade Control – automatic and self-optimizing adjustment of the PID control parameters with external constancy of ± 0.05 °C.



Condensation protection.

Superb design solution. Integrated ventilation directs air over the bath lid and minimizes condensation.



Stable. Mobile.

Perfect stability thanks to rubber feet. Additionally integrated casters means that even the large, high-performance JULABO circulators are easy to handle.



Connection. Easy.

Inclined pump connections (M16×1) facilitate the connection of applications. Each unit includes 2 barbed fittings of 8/12 mm diameter each.



Space saving.

Place your JULABO circulators right next to an application, another unit, or wall. This saves space. A lack of vents and connections on the side makes it possible.



Refrigerated circulators



Refrigerated/heating circulators of the MAGIO range are perfect for precise, reliable temperature control of demanding external applications. The devices are designed to surpass the requirements of laboratories and institutions around the world with their application of modern technology and high quality.



Refrigerated circulators

MAGIO MS refrigerated/heating circulators

for working temperatures from -50 °C to +200 °C

As with all circulators from the MAGIO range, the refrigerated circulators stand out thanks to their premium quality, high performance and intuitive operation. The devices offer extra strong pressure and suction pumps, thus fulfilling the highest demands for temperature control of external applications. Whether in basic research, material testing or technical systems – the MAGIO refrigerated circulators offer high-tech solutions for high customer requirements.

- Ideal for demanding external applications
- Simple control of complex applications
- Continuously adjustable, extremely powerful pressure/suction pump
- Flow rate 16 ... 31 l/min, pressure 3.5 ... 13.3 psi, suction 0.4 ... 5.8 psi
- Large, high-resolution TFT touch display with multilingual user interface
- Parts being in contact with the medium made of stainless steel
- Integrated programmer
- External Pt100 sensor connection
- USB interface
- RS232 interface
- Ethernet interface
- Analog interfaces (accessories)
- Classification III according to DIN 12876-1




Full pump power

All MAGIO models have an extremely powerful pressure/suction pump with performance values of 13.3 and -5.8 psi. The pump is continuously adjustable, making it perfect for adjustment to pressure or volume-sensitive external applications.

Pump capacity


Bath fluid: Water



■ lowest pump speed
■ highest pump speed

Heat-up time*


Bath fluid: Thermal



■ 310F ■ 600F ■ 1000F
■ 601F ■ 900F

Cool-down time

Bath fluid: Ethanol



■ 310F ■ 600F ■ 1000F
■ 601F ■ 900F

*with 2 kW heater / 230 V





MAGIO™ MS-310F

Order No.	9 032 713*		
Working temperature range °C	-30 ... +200		
Temperature stability °C	± 0.01		
Heating capacity kW	1 (115V) 2 (230V)		
	+20 °C	0 °C	-10 °C
Cooling capacity kW (Medium: Ethanol)	0.26	0.21	0.17
	-20 °C	-30 °C	-40 °C
	0.10	0.01	-
Flow rate l/min	16 ... 31		
Pressure psi	3.5 ... 13.3		
Suction psi	0.4 ... 5.8		
Bath opening / bath depth inch	W × L / D 5.1 × 5.9 / 5.9		
Filling volume min. liters	3 ... 4		
Dimensions inch	W × L × H 9.1 × 15.7 × 25.6		

*also available with natural refrigerant
Order No. **9 032 743**



MAGIO™ MS-600F

Order No.	9 032 704		
Working temperature range °C	-35 ... +200		
Temperature stability °C	± 0.01		
Heating capacity kW	1 (115V) 2 (230V)		
	+20 °C	0 °C	-10 °C
Cooling capacity kW (Medium: Ethanol)	0.6	0.44	0.27
	-20 °C	-30 °C	-40 °C
	0.16	0.04	-
Flow rate l/min	16 ... 31		
Pressure psi	3.5 ... 13.3		
Suction psi	0.4 ... 5.8		
Bath opening / bath depth inch	W × L / D 8.7 × 5.9 / 5.9		
Filling volume min. liters	5 ... 7.5		
Dimensions inch	W × L × H 13 × 18.5 × 27.2		



MAGIO™ MS-601F

Order No.	9 032 705		
Working temperature range °C	-35 ... +200		
Temperature stability °C	± 0.01		
Heating capacity kW	1 (115V) 2 (230V)		
	+20 °C	0 °C	-10 °C
Cooling capacity kW (Medium: Ethanol)	0.6	0.52	0.27
	-20 °C	-30 °C	-40 °C
	0.16	0.04	-
Flow rate l/min	16 ... 31		
Pressure psi	3.5 ... 13.3		
Suction psi	0.4 ... 5.8		
Bath opening / bath depth inch	W × L / D 8.7 × 5.9 / 7.9		
Filling volume min. liters	8 ... 10		
Dimensions inch	W × L × H 13 × 18.5 × 29.1		



MAGIO™ MS-900F

Order No.	9 032 706		
Working temperature range °C	-38 ... +200		
Temperature stability °C	± 0.01		
Heating capacity kW	1 (115V) 2 (230V)		
	+20 °C	0 °C	-10 °C
Cooling capacity kW (Medium: Ethanol)	0.9	0.8	0.52
	-20 °C	-30 °C	-40 °C
	0.31	0.11	-
Flow rate l/min	16 ... 31		
Pressure psi	3.5 ... 13.3		
Suction psi	0.4 ... 5.8		
Bath opening / bath depth inch	W × L / D 10.2 × 13.8 / 7.9		
Filling volume min. liters	21 ... 30		
Dimensions inch	W × L × H 15.4 × 24.4 × 29.5		



MAGIO™ MS-1000F

Order No.	9 032 707		
Working temperature range °C	-50 ... +200		
Temperature stability °C	± 0.01		
Heating capacity kW	1 (115V) 2 (230V)		
	+20 °C	0 °C	-10 °C
Cooling capacity kW (Medium: Ethanol)	1	0.96	0.7
	-20 °C	-30 °C	-40 °C
	0.51	0.25	0.11
Flow rate l/min	16 ... 31		
Pressure psi	3.5 ... 13.3		
Suction psi	0.4 ... 5.8		
Bath opening / bath depth inch	W × L / D 7.1 × 5.1 / 5.9		
Filling volume min. liters	5 ... 7.5		
Dimensions inch	W × L × H 16.5 × 19.3 × 27.6		

MAGIO **heating circulators** offer professional technology for demanding tasks in the laboratory or industry. The wide range of models provide a flexible solution for any application.



Heating circulators



Heating circulators

MAGIO MS and MX bridge mounted circulators


for working temperatures from +20 °C to +300 °C

MAGIO bridge mounted circulators combine high temperature performance with maximum flexibility. The adjustable bridge allows the circulators to be used with bath tanks up to a filling volume of 100 liters.

- Immersion depth of 7.9 inch (MX-Z) and 5.9 inch (MS-Z)
- Strong heating capacity
- Extendable stainless steel bridge from 13 to 26.8 inch
- Ideal for demanding external applications
- Simple control of complex applications
- Continuously adjustable, extremely powerful pressure/suction pump
- Flow rate 16 ... 31 l/min, pressure 3.5 ... 13.3 psi, suction 0.4 ... 5.8 psi
- Large, high-resolution TFT touch display with multilingual user interface
- Parts being in contact with the medium made of stainless steel
- Integrated programmer
- External Pt100 sensor connection
- USB interface
- RS232 interface
- Ethernet interface
- Analog interfaces (accessories)
- Classification III according to DIN 12876-1

Pump capacity

Medium: Water



■ lowest pump speed
■ highest pump speed





MAGIO™ MS-Z

Order No.	9 032 201
Working temperature range °C ¹⁾	+20 ... +300
Temperature stability °C	± 0.01
Heating capacity kW	1 (115V) 2 (230V)
Flow rate l/min	16 ... 31
Pressure psi	3.5 ... 13.3
Suction psi	0.4 ... 5.8
Dimensions inch	W × L × H 13.4 × 7.5 × 14.2



MAGIO™ MX-Z

Order No.	9 033 201
Working temperature range °C ¹⁾	+20 ... +300
Temperature stability °C	± 0.01
Heating capacity kW	3 (230V)
Flow rate l/min	16 ... 31
Pressure psi	3.5 ... 13.3
Suction psi	0.4 ... 5.8
Dimensions inch	W × L × H 13.4 × 7.5 × 16.1



High resolution TFT touch display

The modern TFT touch display gives you all the important information at a glance. Three large, predefined main screens clearly display data and graphics with various application priorities. Menu navigation is self-explanatory, arranged by relevance to daily operations and easy to operate with the touch of a finger. The in-built help function provides detailed support in case of additional questions.

¹⁾ For applications near or below ambient temperature: use a cooling coil or JULABO immersion cooler.

Heating circulators

MAGIO MS and MX heating circulators

for working temperatures from +20 °C to +300 °C

MAGIO heating circulators feature professional technology for the most demanding applications. The systems have been designed to provide precise temperature control to external applications. However samples can also be temperature-controlled inside the high-quality insulated, closed bath tank.

- Models for internal and external applications from 3 to 26 liters
- Ideal for demanding external applications
- Simple control of complex applications
- Continuously adjustable, extremely powerful pressure/suction pump
- Large color TFT touch display, multi-lingual user interface
- Stainless steel parts in contact with the medium
- Flow rate 16 ... 31 l/min, pressure 3.5 ... 13.3 psi, suction 0.4 ... 5.8 psi
- Integrated programmer
- External Pt100 sensor connection
- USB interface
- RS232 interface
- Ethernet interface
- Analog interfaces (accessories)
- Classification III according to DIN 12876-1
- High-quality thermal insulation of the bath tanks
- Built-in drain tap for easy and safe drainage

We offer a comprehensive range of accessories to adapt the MAGIO heating circulators to your individual application (racks, tubing, adapters, and more).



MAGIO™ MS-BC4

Order No. 9 032 504

Working temperature range °C ¹⁾ +20 ... +300

Temperature stability °C ± 0.01

Heating capacity kW 1 (115V) | 2 (230V)

Flow rate l/min 16 ... 31

Pressure psi 3.5 ... 13.3

Suction psi 0.4 ... 5.8

Bath opening/bath depth inch W × L / D
5.1 × 5.9 × 5.9

Filling volume liters 3 ... 4.5

Dimensions inch W × L × H
9.1 × 16.1 × 16.5





MAGIO™ MX-BC6

Order No. 9 033 506

Working temperature range °C ¹⁾ +20 ... +300

Temperature stability °C ± 0.01

Heating capacity kW 3 (230V)

Flow rate l/min 16 ... 31

Pressure psi 3.5 ... 13.3

Suction psi 0.4 ... 5.8

Bath opening/bath depth inch W × L / D
5.1 × 5.9 × 7.9

Filling volume liters 4.5 ... 6

Dimensions inch W × L × H
9.4 × 17.3 × 18.5



MAGIO™ MX-BC12

Order No. 9 033 512

Working temperature range °C ¹⁾ +20 ... +300

Temperature stability °C ± 0.01

Heating capacity kW 3 (230V)

Flow rate l/min 16 ... 31

Pressure psi 3.5 ... 13.3

Suction psi 0.4 ... 5.8

Bath opening/bath depth inch W × L / D
5.1 × 5.9 × 7.9

Filling volume liters 8.5 ... 12

Dimensions inch W × L × H
13 × 19.3 × 18.5



MAGIO™ MX-BC26

Order No. 9 033 526

Working temperature range °C ¹⁾ +20 ... +300

Temperature stability °C ± 0.01

Heating capacity kW 3 (230V)

Flow rate l/min 16 ... 31

Pressure psi 3.5 ... 13.3

Suction psi 0.4 ... 5.8


Bath opening/bath depth inch W × L / D
5.1 × 5.9 × 7.9

Filling volume liters 19 ... 26

Dimensions inch W × L × H
15.4 × 24.4 × 18.9

Heat-up time*


Medium: Thermal



BC4 BC6
BC12 BC26

Pump capacity

Medium: Water



lowest pump speed
highest pump speed

*with 3 kW heater/230 V

¹⁾ For applications near or below ambient temperature: use a cooling coil or JULABO immersion cooler.


JULABO Thermal bathfluid

JULABO Thermal bath fluids have been carefully selected after long-term testing. They are ideally suited for all temperature control applications guaranteeing safe and reliable operation. Choosing the proper bath fluid is critical for high performance temperature control. The viscosity and heat conductivity of the Thermal fluids are specifically selected for use with JULABO MAGIO temperature control instruments.

Advantages

- Wide temperature ranges
- Low viscosity
- High stability
- Good heat conductivity
- Minimum odor
- Long fluid life

Working temperature ranges

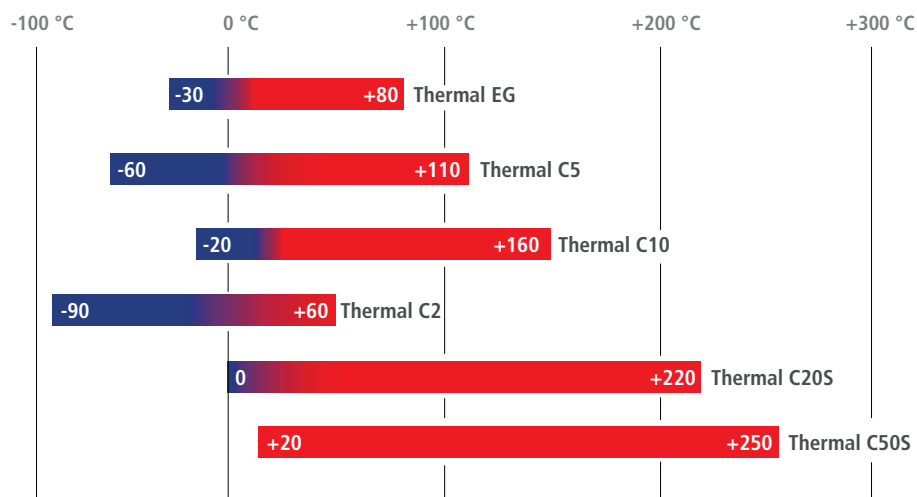

Makes routine laboratory work easier

JULABO Thermal bath fluids are delivered in containers with a handy drain tap.

JULABO Thermal bath fluids based on silicone ...

... are chemically inert substances which do not affect metals like iron, copper, zinc, aluminum, chrome or nickel. Compared to other fluids, JULABO Thermal fluids have an extraordinarily low electrical conductivity. When properly stored, the fluids will last for 12 months and longer as they are not susceptible to climatic influences.

JULABO Thermal bath fluids based on water-glycol ...

... (monoethylenglycol with anti-corrosion additives) have excellent thermal characteristics and a low viscosity. In addition, they provide anti-freeze protection, i.e. they can be applied at temperatures below the freezing point of water.

More information about JULABO Thermal bath fluids ...

... in our brochure 'JULABO Bath Fluids Explained' at www.julabo.us





Thermal EG

Order No. 5 liters 8 940 125

Order No. 10 liters 8 940 124

Working temperature range °C -30 ... +80

Flash point °C not applicable

Fire point °C not applicable

Viscosity, (kinematic at +20 °C) mm²/s 4.07

Density (at +20 °C) g/cm³ 1.08

Pour point °C -70

Boiling point °C +108

Ignition temperature °C +430

Color light yellow



Thermal C5

Order No. 5 liters 8 940 107

Order No. 10 liters 8 940 106

Working temperature range °C -60 ... +110

Flash point °C >+135

Fire point °C +142

Viscosity, (kinematic at +20 °C) mm²/s 5

Density (at +20 °C) g/cm³ 0.92

Pour point °C -90

Boiling point °C >200

Ignition temperature °C >400

Color clear



Thermal C10

Order No. 5 liters 8 891 405

Order No. 10 liters 8 891 404

Working temperature range °C -20 ... +160

Flash point °C +163

Fire point °C +220

Viscosity, (kinematic at +20 °C) mm²/s 10.8

Density (at +20 °C) g/cm³ 0.94

Pour point °C -70

Boiling point °C >200

Ignition temperature °C +370

Color clear



Thermal C2

Order No. 5 liters 8 940 105

Order No. 10 liters 8 940 104

Working temperature range °C -90 ... +60

Flash point °C +75

Fire point °C +80

Viscosity, (kinematic at +20 °C) mm²/s 2

Density (at +20 °C) g/cm³ 0.87

Pour point °C -100

Boiling point °C +230

Ignition temperature °C +335

Color clear



Thermal C20S

Order No. 5 liters 8 891 409

Order No. 10 liters 8 891 408

Working temperature range °C 0 ... +220

Flash point °C +230

Fire point °C +264

Viscosity, (kinematic at +20 °C) mm²/s 22.3

Density (at +20 °C) g/cm³ 0.95

Pour point °C -65

Boiling point °C +424

Ignition temperature °C +385

Color light brown



Thermal C50S

Order No. 5 liters 8 940 103

Order No. 10 liters 8 940 102

Working temperature range °C +20 ... +250

Flash point °C +270

Fire point °C +360

Viscosity, (kinematic at +20 °C) mm²/s 55

Density (at +20 °C) g/cm³ 0.96

Pour point °C -55

Boiling point °C >+300

Ignition temperature °C >+400

Color light brown

Accessories




Extendable bridge

Order No.	Description	Suitable for
9 970 201	adjustable from 330 to 680 mm	MAGIO




Hollow balls to reduce heat loss, evaporation, oxygen input, odors, and action of light

Order No.	Description	Suitable for
8 970 010	Hollow balls, polypropylene®, 20 mm Ø, 1000 pcs (up to +100 °C, for water only)	MAGIO



Test tube racks made of stainless steel, up to +150 °C

Order No.	Description	Suitable for
9 970 320	Test tube rack for 30 tubes 100 × 17 mm	MS-310F
9 970 323	Test tube rack for 10 falcon tubes 50 ml	MS-310F



Adjustable platforms

Order No.	Description	Suitable for
9 970 506	Immersion-height adjustable platform	MS-900F, MX-BC26



Heat exchangers / cooling installations

Order No.	Description	Suitable for
9 970 240	Bath lid with built-in heat exchanger	MS-310F, MS-BC4, MX-BC6
9 970 242	Bath lid with built-in heat exchanger	MS-600F, MS-601F, MS-1000F, MX-BC12
9 970 186	Installation cooling coil	MS-Z, MS-BC4



Viton® tubing (-35 °C ... +200 °C)

Order No.	Description	Suitable for
8 930 108	1 m, 8 mm ID	MAGIO
8 930 110	1 m, 10 mm ID	MAGIO
8 930 112	1 m, 12 mm ID	MAGIO




Silicon tubing (-50 °C ... +180 °C)

Order No.	Description	Suitable for
8 930 120	1 m, 8 mm ID	MAGIO
8 930 122*	1 m, 12 mm ID	MAGIO

*Not compatible for use with silicone fluids!



Accessories



PTFE tubing (-60 °C ... +180 °C)

Order No.	Description	Suitable for
8 930 140	1 m, 8 mm ID	MAGIO
8 930 142	1 m, 12 mm ID	MAGIO



Tubing insulation (-50 °C ... +100 °C)

Order No.	Description	Suitable for
8 930 410	1 m, for tubing 8-10 mm ID	CR® / Viton® tubing
8 930 412	1 m, for tubing 12 mm ID	CR® / Viton® tubing



Tube clamps

Order No.	Description	Suitable for
8 970 480	2 tube clamps, size 1	CR® / Viton® tubing 8 mm ID
8 970 481	2 tube clamps, size 2	CR® / Viton® tubing 10-12 mm ID



Metal tubing flexible, triple insulated, (-100 °C ... +350 °C)

Order No.	Description	Suitable for
8 930 209	0.5 m metal tubing, 2 fittings M16×1 female	MAGIO
8 930 210	1.0 m metal tubing, 2 fittings M16×1 female	MAGIO
8 930 211	1.5 m metal tubing, 2 fittings M16×1 female	MAGIO
8 930 214	3.0 m metal tubing, 2 fittings M16×1 female	MAGIO



Metal tubing flexible, insulated, (-50 °C ... +200 °C)

Order No.	Description	Suitable for
8 930 220	0.5 m metal tubing, 2 fittings M16×1 female	MAGIO
8 930 221	1.0 m metal tubing, 2 fittings M16×1 female	MAGIO
8 930 222	1.5 m metal tubing, 2 fittings M16×1 female	MAGIO
8 930 223	3.0 m metal tubing, 2 fittings M16×1 female	MAGIO



Connectors and adapters

Order No.	Description	Suitable for
8 970 446	2 barbed fittings for tubing 8 mm ID	MAGIO
8 970 447	2 barbed fittings for tubing 10 mm ID	MAGIO
8 970 445	2 barbed fittings for tubing 12 mm ID	MAGIO
8 970 443	1 adapter M16×1 male to M16×1 male	MAGIO
8 970 490	2 collar nuts M16×1 female	MAGIO
8 970 442	2 elbow fittings 90°, M16×1 female/male	MAGIO
8 890 024	2 adapters M16×1 female to M16×1 female	MAGIO
8 970 448	2 elbow fittings 90°, M16×1 female/male, side length 1 × 54 mm / 1 × 120 mm	MAGIO
8 890 004	2 adapters M16×1 female to NPT 1/4" male	MAGIO
8 890 005	2 adapters M16×1 female to NPT 1/4" female	MAGIO
8 890 006	2 adapters M16×1 female to NPT 3/8" male	MAGIO
8 890 007	2 adapters M16×1 female to NPT 3/8" female	MAGIO
8 890 008	2 adapters M16×1 female to NPT 1/2" male	MAGIO
8 890 009	2 adapters M16×1 female to NPT 1/2" female	MAGIO
8 890 010	2 adapters M16×1 male to NPT 1/4" female	MAGIO
8 891 008	1 adapter M16×1 male to BSP 1/2" female	MAGIO
8 891 009	1 adapter M16×1 male to BSP 3/4" female	MAGIO
8 890 011	2 adapters M16×1 female to tube 1/4" male	MAGIO
8 890 012	2 adapters M16×1 female to tube 3/8" male	MAGIO
8 890 013	2 adapters M16×1 female to tube 1/2" male	MAGIO



Shut-off valves for loop circuit

Order No.	Description	Suitable for
8 970 456	Shut-off valve (-10 °C ... +100 °C), M16×1	MAGIO
8 970 457	Shut-off valve (-30 °C ... +200 °C), M16×1	MAGIO
8 980 701	Solenoid valve set (2 pieces, max. +100 °C)	MAGIO

Accessories



Distributor

Order No.	Description	Suitable for
8 970 470	Twin distributing adapter with barbed fittings	Tubing 8 mm ID
8 970 471	Twin distributing adapter with barbed fittings	Tubing 12 mm ID
8 970 472	Twin distributing adapter with barbed fittings	Tubing 10 mm ID
8 970 473	Twin distributing adapter M16×1 female to 2 × M16×1 male	MAGIO



External Pt100 sensor

Order No.	Description	Suitable for
8 981 003	External Pt100 sensor, 200 × 6 mm ø, stainless steel, 1.5 m connecting cable	MAGIO
8 981 006	External Pt100 sensor, 20 × 2 mm ø, stainless steel, 1.5 m connecting cable	MAGIO
8 981 010	External Pt100 sensor, 300 × 6 mm ø, stainless steel, 1.5 m connecting cable	MAGIO
8 981 013	External Pt100 sensor, 600 × 6 mm ø, stainless steel/PTFE, 3 m connecting cable	MAGIO
8 981 014	External Pt100 sensor, 1200 × 6 mm ø, stainless steel/PTFE, 3 m connecting cable	MAGIO
8 981 015	External Pt100 sensor, 300 × 6 mm ø, stainless steel/PTFE, 3 m connecting cable	MAGIO
8 981 016	External Pt100 sensor, 900 × 6 mm ø, stainless steel/PTFE, 3 m connecting cable	MAGIO
8 981 017	External Pt100 sensor, 200 × 6 mm ø, stainless steel/PTFE, 3 m connecting cable	MAGIO
8 981 020	M+R in-line Pt100 sensor with external Pt100 sensor, 1.5 m connecting cable	MAGIO
8 981 103	Extension cable 3.5 m for Pt100 sensor. With Lemosa connectors	MAGIO



Connection plugs

Order No.	Description	Suitable for
8 980 131	External Pt100 sensor plug	MAGIO
8 980 133	Standby plug, 3 pin	MAGIO
8 980 135	Alarm plug 5 pin	MAGIO
8 980 136	REG EPROG-plug 6 pin	MAGIO
8 980 137	Stakei plug	MAGIO



Software and hardware for instrument control, data recording and visualization, interfaces

Order No.	Description	Suitable for
8 901 102	EasyTEMP Software (free of charge at www.julabo.com)	MAGIO
8 901 105	EasyTEMP Professional Software, incl. USB dongle	MAGIO
9 900 100	Electronic module with analog connectors	MAGIO
9 900 110	2 m, USB interface cable, type A-B	MAGIO
9 900 112	5 m, USB 2.0 repeater extension cable	MAGIO
9 900 114	10 m, USB 2.0 repeater extension cable	MAGIO



Order No.	Description	Suitable for
8 980 073	2.5 m, RS232 interface cable with 9-pin plug/9 pin socket	MAGIO
8 980 074	5 m, RS232 interface cable with 9-pin plug/9 pin socket	MAGIO
8 980 075	3 m, RS232 interface cable with 9-pin plug/9-pin socket	MAGIO
8 980 031	Ethernet/RS232 interface converter for temperature control instruments with RS232	MAGIO
8 980 032	Ethernet/RS232 interface converter for up to 4 JULABO instruments using RS232 interface cable (8980074). Connection to an existing network via RJ45 cable (8980071).	MAGIO
8 980 033	Ethernet/RS232 interface converter for up to 8 JULABO devices using RS232 interface cable (8980074). Connection to an existing network via RJ45 cable (8980071).	MAGIO
8 900 020	Profibus DP interface	MAGIO
8 980 036	ATEX Tablet Agile X	MAGIO



Calibration and testing certificates

Order No.	Description	Suitable for
8 902 901	1-point manufacturer's calibration certificate	MAGIO
8 902 903	3-point manufacturer's calibration certificate	MAGIO
8 902 905	5-point manufacturer's calibration certificate	MAGIO
8 903 015	Manufacturer's testing certificate for JULABO instruments without refrigeration unit	MX-Z, MS-Z, MS-BC4, MX-BC6, MX-BC12, MX-BC26
8 903 025	Manufacturer's testing certificate for JULABO refrigeration units (up to 1 kW cooling capacity at +20 °C)	MS-310F, MS-600F, MS-601F, MS-900F, MS-1000F



IQ/OQ documentation for equipment qualification

Order No.	Description	Suitable for
2 310 120	IQ/OQ documentation, category 2	MAGIO refrigerated circulator



Preventative maintenance contracts

Order No.	Description	Suitable for
2 350 100	Preventative maintenance contract standard includes the following services: Visual inspection, technical diagnostics, read-out of error memory (BlackBox), testing of tube connections and bath fluid, thorough cleaning of performance-reducing contaminations, testing of control behavior (temperature stability), sensor calibration if needed, testing/measuring of pump and cooling capacity (depending on model) and firmware update (if no hardware adjustment is required)	MAGIO
2 350 110	Preventative maintenance contract premium includes all services listed above as well as spare and wear parts and labor required for installation and replacement	MAGIO

The **JULABO** advantages at a glance.


JULABO temperature control solutions – high-precision and speed

JULABO products include high-quality temperature control solutions to cover the temperature range -95 °C to +400 °C.




Refrigerated Circulators

The JULABO Refrigerated Circulators are suitable for internal and external applications and can be used within the temperature range -95 °C to +200 °C.



Water Baths and Shaking Water Baths

JULABO Water Baths and Shaking Water Baths can be used for a variety of applications within the temperature range +18 °C to +99.9 °C.



Heating Circulators

Heating Circulators are available in various designs including Heating Immersion Circulators, Open Heating Bath Circulators, or Heating Circulators and cover the temperature range +20 °C to +300 °C.




Additional Products

In addition, the JULABO product portfolio offers instruments for special requirements such as Calibration Baths, Beer Forcing Test Baths, Immersion / Flow-Through Coolers and Temperature Controllers.



Highly Dynamic Temperature Control Systems

The Highly Dynamic Temperature Control Systems from JULABO can be used for demanding temperature applications ranging from -92 °C to +400 °C. The PRESTO series offers unique high-performance specifications to meet these requirements.




Wireless Communication & Software Solutions

JULABO facilitates the automation of applications. The temperature control instruments can be comfortably controlled and monitored via PC.



Recirculating Coolers

JULABO Recirculating Coolers are highly efficient and therefore offer an environmentally friendly and economic alternative to tap water cooling in the temperature range -25 °C to +130 °C.



Accessories

The extensive range of instrument accessories ensures JULABO products are adaptable for research and industry use.

Comprehensive service and on-site support

JULABO takes pride in offering customers expert advice for pairing the proper JULABO temperature control solution to their specific application. JULABO service and support options include installation and calibration, equipment qualification documentation and application training. These invaluable services ensure customer confidence in the operation and maintenance of any JULABO unit.

Individual requirements – individual products

JULABO's wide product range offers a solution for almost any application. However, if a specific application needs more than a standard product can offer, the JULABO specialists will work out an individual solution with you.



JULABO. Quality.

Highest quality standards to ensure a long product life.



Green technology.

Deliberately engineered with environmentally friendly materials and technologies.



Satisfied customers.

11 subsidiaries and more than 100 partners worldwide guarantee fast and qualified JULABO support.



100% checked.

100 % testing. 100 % quality. Every JULABO product is shipped to customers after a successful final inspection.



Quick start.

Individual JULABO consultation and comprehensive manuals at your disposal.



Services 24/7.

Around the clock availability. You can find suitable accessories, data sheets, manuals, case studies and more at www.julabo.us.

Technical specifications

Model	Order No.	Working temperature range °C	Display / display resolution	Temperature control	Temperature stability °C	Heating capacity kW	Cooling refrigeration unit	Classification according to DIN 12876-1	Permissible ambient temperature °C
MS-310F	9 032 713*	-30 ... +200	7" TFT/0.01	ICC	± 0.01	1 (115V) 2 (230V)	Air	III (FL)	+5 ... +40
MS-600F	9 032 704	-35 ... +200	7" TFT/0.01	ICC	± 0.01	1 (115V) 2 (230V)	Air	III (FL)	+5 ... +40
MS-601F	9 032 705	-35 ... +200	7" TFT/0.01	ICC	± 0.01	1 (115V) 2 (230V)	Air	III (FL)	+5 ... +40
MS-900F	9 032 706	-38 ... +200	7" TFT/0.01	ICC	± 0.01	1 (115V) 2 (230V)	Air	III (FL)	+5 ... +40
MS-1000F	9 032 707	-50 ... +200	7" TFT/0.01	ICC	± 0.01	1 (115V) 2 (230V)	Air	III (FL)	+5 ... +40
MS-Z	9 032 201	+20 ... +300	7" TFT/0.01	ICC	± 0.01	1 (115V) 2 (230V)	-	III (FL)	+5 ... +40
MX-Z	9 033 201	+20 ... +300	7" TFT/0.01	ICC	± 0.01	3 (230V)	-	III (FL)	+5 ... +40
MS-BC4	9 032 504	+20 ... +300	7" TFT/0.01	ICC	± 0.01	1 (115V) 2 (230V)	-	III (FL)	+5 ... +40
MX-BC6	9 033 506	+20 ... +300	7" TFT/0.01	ICC	± 0.01	3 (230V)	-	III (FL)	+5 ... +40
MX-BC12	9 033 512	+20 ... +300	7" TFT/0.01	ICC	± 0.01	3 (230V)	-	III (FL)	+5 ... +40
MX-BC26	9 033 526	+20 ... +300	7" TFT/0.01	ICC	± 0.01	3 (230V)	-	III (FL)	+5 ... +40

*also available with natural refrigerant Order No. 9 032 743

Model	Cooling capacity (kW) at bath temperature (°C) (Bath fluid: Ethanol)						Type ⊕ Pressure / ⊖ suction pump	Pump			Pump connection thread male	Filling volume liters	Mains connection V/Hz/A
	+20	0	-10	-20	-30	-40		Flow rate liters/min	Pressure psi	Suction psi			
MS-310F	0.26	0.21	0.17	0.10	0.01	-	⊕	16 ... 31	3.5 ... 13.3	0.4 ... 5.8	M16x1	3 ... 4	115/60/12
MS-600F	0.6	0.44	0.27	0.16	0.04	-	⊕	16 ... 31	3.5 ... 13.3	0.4 ... 5.8	M16x1	5 ... 7.5	115/60/12
MS-601F	0.6	0.52	0.27	0.16	0.04	-	⊕	16 ... 31	3.5 ... 13.3	0.4 ... 5.8	M16x1	8 ... 10	115/60/12
MS-900F	0.9	0.8	0.52	0.31	0.11	-	⊕	16 ... 31	3.5 ... 13.3	0.4 ... 5.8	M16x1	21 ... 30	115/60/16
MS-1000F	1	0.96	0.7	0.51	0.25	0.11	⊕	16 ... 31	3.5 ... 13.3	0.4 ... 5.8	M16x1	5 ... 7.5	115/60/16
MS-Z	-	-	-	-	-	-	⊕	16 ... 31	3.5 ... 13.3	0.4 ... 5.8	M16x1	-	115/60/10
MX-Z	-	-	-	-	-	-	⊕	16 ... 31	3.5 ... 13.3	0.4 ... 5.8	M16x1	-	-
MS-BC4	-	-	-	-	-	-	⊕	16 ... 31	3.5 ... 13.3	0.4 ... 5.8	M16x1	3 ... 4.5	115/60/10
MX-BC6	-	-	-	-	-	-	⊕	16 ... 31	3.5 ... 13.3	0.4 ... 5.8	M16x1	4.5 ... 6	-
MX-BC12	-	-	-	-	-	-	⊕	16 ... 31	3.5 ... 13.3	0.4 ... 5.8	M16x1	8.5 ... 12	-
MX-BC26	-	-	-	-	-	-	⊕	16 ... 31	3.5 ... 13.3	0.4 ... 5.8	M16x1	19 ... 26	-

Model	External Pt100 sensor connection	Ethernet interface	USB interface	RS232 interface	RS485 interface	Modbus TCP	Analog interface	Usable bath opening W x L / D inch	Dimensions W x L x H inch	Weight net lbs
MS-310F	yes	yes	yes	yes	yes	yes	accessories	5.1 x 5.9 / 5.9	9.1 x 15.7 x 25.6	63.9
MS-600F	yes	yes	yes	yes	yes	yes	accessories	8.7 x 5.9 / 5.9	13 x 18.5 x 27.2	84.4
MS-601F	yes	yes	yes	yes	yes	yes	accessories	8.7 x 5.9 / 7.9	13 x 18.5 x 29.1	91.5
MS-900F	yes	yes	yes	yes	yes	yes	accessories	10.2 x 13.8 / 7.9	15.4 x 24.4 x 29.5	121
MS-1000F	yes	yes	yes	yes	yes	yes	accessories	7.1 x 5.1 / 5.9	16.5 x 19.3 x 27.6	119.3
MS-Z	yes	yes	yes	yes	yes	yes	accessories	-	13.4 x 7.5 x 14.2	15.9
MX-Z	yes	yes	yes	yes	yes	yes	accessories	-	13.4 x 7.5 x 16.1	16.8
MS-BC4	yes	yes	yes	yes	yes	yes	accessories	5.1 x 5.9 x 5.9	9.1 x 16.1 x 16.5	24.5
MX-BC6	yes	yes	yes	yes	yes	yes	accessories	5.1 x 5.9 x 7.9	9.4 x 17.3 x 18.5	28.2
MX-BC12	yes	yes	yes	yes	yes	yes	accessories	5.1 x 5.9 x 7.9	13 x 19.3 x 18.5	32.2
MX-BC26	yes	yes	yes	yes	yes	yes	accessories	5.1 x 5.9 x 7.9	15.4 x 24.4 x 18.9	47.2

Unless otherwise indicated, all data relates to the operation at nominal voltage and frequency and +20 °C ambient temperature.

Cooling capacity measured according to DIN12876-2. Information regarding used refrigerants can be found under www.julabo.com.

Voltage options

Model	Order No.	Available mains voltages / heating capacity in kW			
		200 - 230 V 50 - 60 Hz	100 - 115 V 50 - 60 Hz	115 V 60 Hz	100 V 50 - 60 Hz
MS-310F	9 032 713	1.6 ... 2	-	1	0.8
MS-600F	9 032 704	1.6 ... 2	-	1	0.8
MS-601F	9 032 705	1.6 ... 2	-	1	0.8
MS-900F	9 032 706	1.6 ... 2	-	1	-
MS-1000F	9 032 707	1.6 ... 2	-	1	-
MS-Z	9 032 201	1.6 ... 2	0.8 ... 1	-	-
MX-Z	9 033 201	2.3 ... 3	-	-	-
MS-BC4	9 032 504	1.6 ... 2	-	1	0.8
MX-BC6	9 033 506	2.3 ... 3	-	-	-
MX-BC12	9 033 512	2.3 ... 3	-	-	-
MX-BC26	9 033 526	2.3 ... 3	-	-	-



NORTH AMERICA

JULABO USA Inc.

884 Marcon Boulevard
Allentown, PA 18109
United States of America

Tel. +1 610 231 0250
Fax +1 610 231 0260
Tollfree +1 800 458 5226

info@julabo.us
www.julabo.us

GERMANY Headquarters

JULABO GmbH
www.julabo.com

ITALY

JULABO Italia Srl.
www.julabo.com

UK

JULABO UK, Ltd.
www.julabo.com

FRANCE

JULABO France SAS
www.julabo.com

NETHERLANDS

JULABO Nederland B.V.
www.julabo.com

JAPAN

JULABO Japan Co., Ltd.
www.julabo-japan.co.jp

KOREA

JULABO Korea Co., Ltd.
www.julabo-korea.co.kr

CHINA

JULABO Technology (Beijing) Co., Ltd.
www.julabo.com.cn

LATIN AMERICA

JULABO Latin America
www.julabo-latinamerica.com

SINGAPORE

JULABO Singapore Pte., Ltd.
www.julabo.com

INDIA

JULABO India
www.julabo.com

**Plus more than
100 partner distributors
worldwide**