



Advanced Test Equipment Corp.

Rentals • Sales • Calibration • Service



LARSON DAVIS

A PCB DIVISION



MODEL SOUNDTRACK LXT®

SOUND LEVEL METER

- Simple Operation – with just one hand!
- 30 hours operation using AA Lithium batteries
- 1/1 and 1/3 octave digital filters
- Extremely rugged – compact and lightweight
- Available in Class 1 or Class 2
- Multi-language for global compatibility
- Equipped with G4 LD Utility Software

MEASUREMENTS

- Real-time broadband display
- Real-time octave and 1/3 octave filters
- L_{eq} (average w/ 3 dB exchange rate)
- TWA
- Logging
- L_{max} / L_{peak}
- Multiple dose and exposure calculations
- Time stamping of relevant metrics

WORKPLACE NOISE SAMPLING

Over the years, various types of Sound Level and Octave Band Meters have been used by Industrial Hygienists and Safety Professionals for monitoring workplace noise, most requiring significant operator training and producing varying degrees of effectiveness. At Larson Davis, we believe this is because until now, Sound Level Meters were designed primarily for use by Acoustical Engineers, not for Safety and Health professionals.

The SoundTrack LxT® Sound Level Meter was developed to meet the unique needs of those involved in workplace noise exposure assessment and plant noise surveys. It is fully compliant with IEC and ANSI standards for class 1 or class 2 sound level meters. In addition, LxT files are fully compatible with the ISO 9612:2009 measurement strategies for task or job-based measurements.

With its sleek ergonomic design to its exceptional exposure data presentations, the SoundTrack LxT® is the perfect tool for gathering, analyzing, and presenting detailed noise environment data quickly, easily, and concisely. New and better ways to organize your sampling methodology and annotate noise survey data save incredible amounts of time and provide better results – all at a price that won't consume your entire instrumentation budget.

SOUNDTRACK LxT®

EASY TO USE, YET POWERFUL!

With its superior ergonomics and rugged compact design, SoundTrack LxT® allows you to capture the data you need while keeping one hand free – invaluable for juggling multiple tasks in hard-to reach locations. Once a test starts, LxT automatically performs all the necessary calculations of workplace exposure – to multiple compliance standards. With the ability to ‘hide’ display screens that are not relevant to your sampling strategy, the LxT is configurable for maximum utility and ease-of-use. Add in the “Store when Stable (Leq)” feature and selective keypad lockout, and you can comfortably hand off the SoundTrack LxT® to minimally trained technicians with assurance of a positive outcome. No more skipped locations, questionable results, and missing data points.


DIGITAL VOICE ANNOTATION

Now you can record your own observations about the environment, the worker and tasks performed, or even whether proper hearing protection is worn – all at the push of a button, using the Digital Voice Note Recording option and included headset microphone. At the end of the day, recorded notes can be played back right from your PC – they are digitally stored with related noise data and exposure calculations for future reference.



AVAILABLE REAL-TIME OCTAVE BAND FREQUENCY ANALYSIS

With optional 1/1 or 1/3 Real-Time Octave Band Frequency Analysis, the SoundTrack LxT® quickly captures frequency band data, because all Octave (or 1/3 Octave) measurements are performed simultaneously. No more tedious “stepping through” each Octave Band, as in the past – all data is captured from virtually the same point in time; which is vital for maximum accuracy in a varying noise environment. What’s more, you’ll save significant amounts of time performing Octave Band measurements, which are an important part of determining effectiveness of Engineering Controls or selecting proper hearing protection devices (HPD’s).

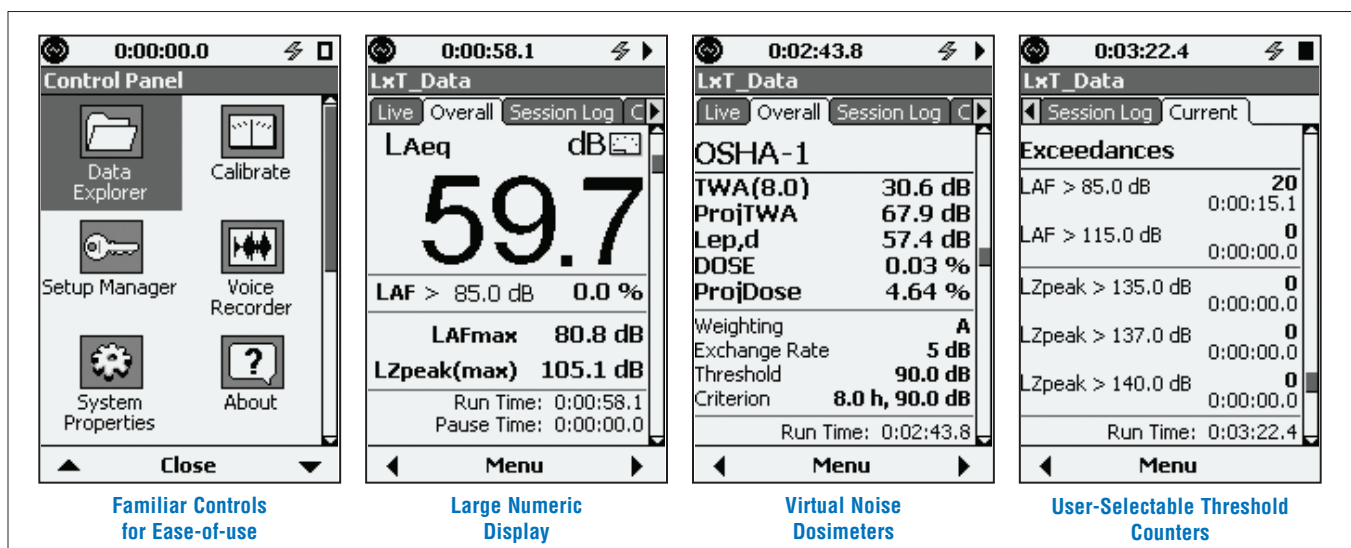

GENERATE CLEAR, CONCISE REPORTS

LD Utility G4 PC software is an indispensable tool for generating the type of data reports and presentations you will be proud to share with your colleagues, your workforce, and management. Color-rich graphic summary reports provide a picture of the noise environment with only the most relevant numeric data values, allowing everyone to quickly understand the nature of the noise exposure. With super-fast USB connection, you will go from measurement to finished report in seconds. By accessing the more advanced features, you will be able to provide in-depth analysis of the noise environment with graphical editing and automatic computation of summary noise metrics. Copy and paste functions allow for inclusion of data into other report formats, and for the most advanced users and research teams – a simple export function allows instant and automatic interface to Microsoft Excel®.

Whether you like a one-page illustrated compliance report or a detailed breakdown of noise data, LD Utility G4 delivers effortlessly and supports other Larson Davis products like Spartan 730 Noise Dosimeters and the HVM200 Vibration Exposure monitoring system. With our software, you will never be hit with recurring licensing fees or other additional costs, should you choose to install SLM Utility G4 on other data access devices within your organization.



INDUSTRIAL HYGIENE SOLUTIONS

PERSONAL NOISE DOSIMETERS

- Truly wireless – with wireless charging and Bluetooth communication
- Full control and live monitoring via LD Atlas™ app
- Download and view measurements, generate reports, and share annotated data from the app
- Built-in bump and motion detection

HUMAN VIBRATION METERS

- Ideal for hand-arm, whole body, and general vibration
- Control and view data from LD Atlas mobile app
- Meets ISO criteria and EU directives
- Range of mounting adaptors and application optimized accelerometer



| SPECIFICATIONS | | | | | |
|---|---|--|---------------------|--|--|
| Integrating Sound Level Meter - Time weighting: Slow, Fast, Impulse, TWA, Peak (peak has independently selectable frequency weighting) Frequency weighting: A, C, & Z, Octave, Fractional Octave (with OBA options). The SoundTrack N/Forcer comes with the next generation G4 LD Utility Software. | | | | | |
| | | LxT1 | LxT2 | LxT1L with optional LOW RANGE Pre-amp | LxT2L with optional LOW RANGE Pre-amp |
| Measurement Range (dB SPL) | A | 39 to 140 | 39 to 140 | 27 to 118 | 27 to 118 |
| | C | 39 to 140 | 39 to 140 | 29 to 118 | 29 to 118 |
| | Z | 44 to 140 | 44 to 140 | 34 to 118 | 34 to 118 |
| Dynamic Range (A-weighted) | | 29 to 140 dB SPL | 29 to 140 dB SPL | 17 to 118 dB SPL | 17 to 118 dB SPL |
| SPL Maximum Level | | 140 dB SPL | 140 dB SPL | 118 dB SPL | 118 dB SPL |
| Peak Level | | 143 dB | 143 dB | 121 dB | 121 dB |
| Measurements (Qty) | | SPL, Leq, TWA (2), Lmin, Lmax, Lpeak, Lpeak (max), Dose (2), Proj. Dose (2), Lep,d, E, E8, E40, SEA, Ln (6), Event Counters (3); (2 RMS, 3 Peak) | | | |
| Flash Data Storage | | 2GB standard | | | |
| Communication | | to PC via USB | | | |
| Display | | High-contrast, monochrome, black on white, ⅓ VGA 160 x 240 dot graphics, 4-level grey-scale, bright white LED backlighting | | | |
| Keypad | | Silicone elastomer “quiet touch” with tactile feedback, 4 dedicated function keys, 3 context soft-keys, and 5 navigation keys | | | |
| Power | | | | | |
| Internal | | 4 AA cells, 1.5 volts each; Alkaline, NiMH, or Lithium | | | |
| External | | 5.0 VDC ±5%, 500 mA maximum, USB powered | | | |
| Battery Life | | Approximately 22 hours (alkaline cells), 30 hours (Lithium cells), depending on usage | | | |
| Physical | | | | | |
| Dimensions (L x W x D) | | 8.8" x 2.8" x 1.6" (22.4 cm x 7.1 cm x 4.1 cm), 11.5" L (29.2 cm) with preamplifier and microphone | | | |
| Weight | | 1.0 lb (471 g), 1.1 lb (513 g) with preamplifier and microphone | | | |
| Environmental | | | | | |
| Operating Temperature | | 14 to 122 °F (-10 to 50 °C) | | | |
| Storage Temperature | | -22 to 140 °F (-30 to 60 °C) | | | |
| Humidity | | ≤ ± 0.5 dB variation from 10% to 99% relative humidity (non-condensing) | | | |
| International Protection Rating | | IP 54 | | | |
| Compliance | | | | | |
| ANSI | | S1.4-2014, S1.25-1991 (R 2007), S1.11-2004 | | | |
| IEC | | 61672-1: 2013, 61672-2002, 60651-2001, 60804-2000, 61260-2001, 61252-2002 | | | |
| CE | | Directive 2004/108/EC, IEC 61326-1:2005 | | | |

| OPTIONS AND ACCESSORIES | |
|-------------------------|---|
| Firmware Options | |
| LXT-LOG | Time History Data Logging |
| LXT-HSLOG | High Speed Logging Option (to 100 ms) |
| LXT-ENV | Measurement History (intervals) |
| LXT-CN | Community Noise, Ldn and Lden |
| LXT-DVA | Digital Voice Annotation |
| LXT-OB1 | 1/1 Octave Real Time Filters |
| LXT-OB3 | 1/1 and 1/3 Octave Real Time Filters |
| Accessories | |
| LXT-ACC | Type 1 Accessory Kit – hard shell case, CAL200 calibrator, USB cable, AC adapter, windscreen and Utility Software |
| LXT-ACC1 | Type 2 Accessory Kit – Hard shell case, CAL150 calibrator, USB cable, AC adapter, windscreen and G4 LD Utility software |
| LXT-CCS | Hard Shell Carrying Case |
| CAL150 | Type 2 Microphone Calibrator |
| CAL200 | Type 1 Microphone Calibrator |
| SWW-DNA | Advanced Analysis Software |
| SWW-DNA-LXT | DNA Instrument Driver for Model LxT |
| LXT-RPT | Full test report for new LxT |

| ORDERING INFORMATION | |
|----------------------|--|
| LXT1 | Class 1 SoundTrack LxT with preamplifier and free field microphone |
| LXT1L | Class 1 SoundTrack LxT with low range option, preamplifier, and free field microphone |
| LXT1-RI | Class 1 SoundTrack LxT with preamplifier and random or diffuse field microphone |
| LXT1L-RI | Class 1 SoundTrack LxT with low range options, preamplifier, and random or diffuse field microphone |
| LXT1B | Class 1 SoundTrack LxT meter only. Does not include preamplifier or microphone. |
| LXT1-QPR | Class 1 SoundTrack LxT configured with 1/4" microphone for measuring high level sound (> 160 dB) |
| LXT1-NFR-PK1 | Class 1 N'Forcer Kit – includes SoundTrack LxT, CAL200 calibrator, portable printer, preamplifier, free field microphone, windscreen, and padded carrying case |
| LXT2 | Class 2 SoundTrack LxT with preamplifier and free field microphone |
| LXT2L | Class 2 SoundTrack LxT with low range option, preamplifier, and free field microphone. |
| LXT2B | Class 2 SoundTrack LxT meter only. Does not include preamplifier or microphone. |
| LXT2-NFR-PK1 | Class 2 N'Forcer Kit – includes SoundTrack LxT, CAL150 calibrator, portable printer, preamplifier, free field microphone, windscreen, and padded carrying case |