

## Advanced Test Equipment Corp. www.atecorp.com 800-404-ATEC (2832)



# ALTAIR® 4XR **Multigas Detector**



Real-time. Rugged. Reliable.

# SAFETY AT THE SPEED OF NOW



### **BE SAFER**

With rapid-response sensors.

- LEL
- CO
- O<sub>2</sub> SO<sub>2</sub>
- H<sub>2</sub>S
- NO<sub>2</sub>





**AVERAGE** 

### **WORK SMARTER** With the ALTAIR Connect app.

- Update detector settings
- Email calibration details
- Create notification groups
- Get compliance reminders







## **STAY CONNECTED**


With alerts from the field.


- Live gas readings
- InstantAlert<sup>™</sup> distress calls
- MotionAlert<sup>™</sup> man-down alarms
- Non-compliance warnings

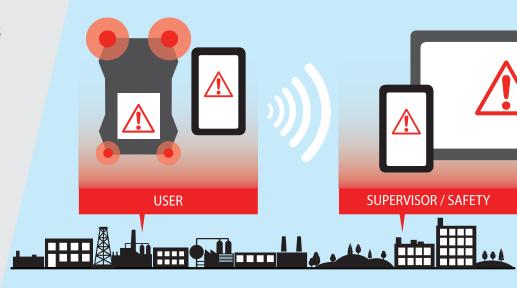



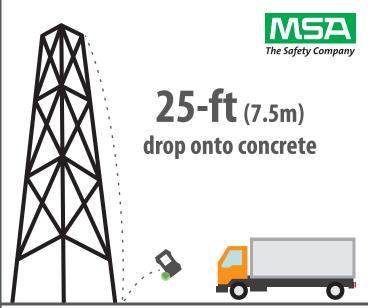


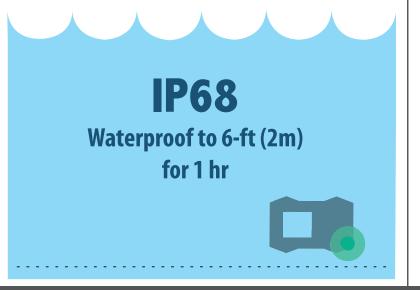

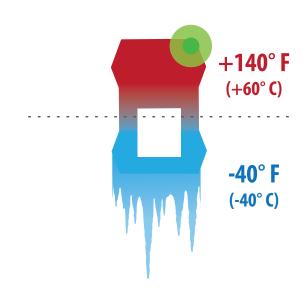


# **BUILT TO WORK WHEREVER YOU WORK**

### **FAST, EFFICIENT MAINTENANCE**



#### **COMPLIANCE AT A GLANCE**

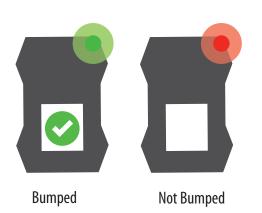

**GUARANTEED PERFORMANCE** 



Instrument & Sensor Warranty

MSA**safety**.com



### **Specifications & Order Information**

Specification	Description		
	Gas	Range	Resolution
	LEL	0-100%	1%
	O <sub>2</sub>	0-30%	0.1%
	CO	0-1999 ppm	1 ppm
GAS TYPES	H <sub>2</sub> S	0-200 pm	1 ppm
	H <sub>2</sub> S-LC	0-100 ppm	0.1 ppm
	SO <sub>2</sub>	0-20 ppm	0.1 ppm
	NO <sub>2</sub>	0-50 ppm	0.1 ppm
WARRANTY	4 years (+ optional 1-year extension)		
DURABILITY	25-foot (7.5 m) drop protection MIL-STD-810G drop protection Certified IP68 rating		
TEMPERATURE RANGE	-40°F to +140°F -40°C to +60°C		
RELATIVE HUMIDITY	5% - 95% intermittent 15% - 90% non-condensing		
POWER	Rechargeable Li-polymer battery 24-hour run-time < 4 hour charge time		
PHYSICAL	4.4 " x 3.0" x 1.4" 11 cm x 7.6 cm x 3.5 cm 8 oz (228 g)		
DATALOGGING	> 50 hours (adjustable) > 500 event logs		

ALTAIR 4XR Gas Detector Part Numbers			
Configuration	Case Color	USA/CAN	ATEX
LEL, O <sub>2</sub> , CO, H <sub>2</sub> S	Charcoal	10178557	10178573
LEL, O <sub>2</sub> , CO, H <sub>2</sub> S	Phosphorescent	10178558	10178569
Need something different? Contact MSA for options.			

Kits with ALTAIR 4XR (LEL, O <sub>2</sub> , CO, H <sub>2</sub> S & Charcoal Case)	USA/CAN
34-liter gas cylinder (1.45% CH <sub>4</sub> , 15% O <sub>2</sub> , 60 ppm CO, 20 ppm H <sub>2</sub> S) Regulator (0.25 l/min)	10178356
ALTAIR Pump Probe 34-liter gas cylinder (1.45% $CH_{4'}$ , 15% $O_{2'}$ , 60 ppm CO, 20 ppm $H_2S$ ) Regulator (0.25 l/min)	10178357

MSA GALAXY® GX2 Automated 4XR Test Stands for 1 Gas Cylinder				
Integrated 4XR Charger	N. America	Europe	UK	Australia
Yes	10128630	10128639	10128659	10128669
No	10128642	10128651	10128661	10128671
Need to accommodate multiple cylinders? Contact MSA for options.				

Calibration Gas		
1.45% CH <sub>4</sub> , 15% O <sub>2</sub> , 60 ppm CO, 20 ppm H <sub>2</sub> S		
34-liter cylinder	10048280	
58-liter cylinder	10045035	
ALTAIR Pump Probe with charger		
For USA/Canada	10152669	
For ATEX/IEC	10052668	
Don't need a charger? Contact MSA for options.		

XCell Sensor Rep	lacement Kits
EX Combustible	10106722
O <sub>2</sub>	10106729
CO/H <sub>2</sub> S	10106725
CO/H <sub>2</sub> S-LC	10121213
CO-H <sub>2</sub> /H <sub>2</sub> S	10121214
SO <sub>2</sub> /H <sub>2</sub> S-LC	10121215
CO/NO <sub>2</sub>	10121217

#### Certifications

**North America** 

Class I, Division 1, Groups A, B, C & D Class II, Division 1, Groups E, F & G Class III, Division 1

Ambient temperature: -40°C to +60°C; T4

#### Canada CSA

CAN/CSA C22.2 No. 152 Combustible Gas Detection Instruments C22.2 No. 152 Performance Ambient Temperature:

-20°C to +54°C; T4

C22.2 No. 157 Intrinsic Safety Ambient Temperature: -40°C to +54°C; T4

Directive 2014/34/EU (ATEX): II 1G Ex ia da IIC T4 Ga, -40°C to +60°C, IP68

Directive 2014/30/EU (EMC): EN50270 Type 2, EN61000-6-3

**IEC** 

Ex ia da IIC T4 Ga,  $-40^{\circ}$ C to  $+60^{\circ}$ C, IP68

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances

shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.

MSA – The Safety Company

1000 Cranberry Woods Drive Cranberry Township, PA 16066 USA 724-776-8600 Phone

www.MSAsafety.com

U.S. Customer Service Center 1-800-MSA-2222 1-800-967-0398

MSA Canada

Phone

1-800-672-2222 1-800-967-0398 Fax

MSA Mexico

01 800 672 7222 Phone