



Advanced Test Equipment Rentals
www.atecorp.com 800-404-ATEC (2832)




160 School House Road, Souderton, PA 18964-9990 USA
Phone 215 720 2121 FAX 215 720 5000

MODEL 1000L
1200 WATTS CW
2500 WATTSS PTT SF

The Model 1000L is an economical, self-contained, air-cooled broadband amplifier designed for laboratory applications that require instantaneous bandwidth, high gain and high power output. Housed in a stylish contemporary enclosure, the Model 1000L is smaller than competitive units with similar power levels. All operating controls are functionally grouped on the front panel for simplicity of operation. These include modern, lighted push-button switches for the command functions, POWER, STANDBY, OPERATE and PULSE, a control for setting the output level of the amplifier, and a meter for monitoring critical operating voltages and currents. Remote control is provided through a rear panel mounted connector. Isolated TTL level remote control can be accomplished using our CP2001 interface. Isolated IEEE-488 compatible control can be provided with our CP3000. A highly versatile unit, the Model 1000L features rugged circuitry and a quick-acting, solid state crowbar circuit to protect the final amplifier tubes from damage due to internal arcing. An electronic circuit is provided to enable rapid gating or blanking of the amplifier.

1000L TYPICAL POWER OUTPUT

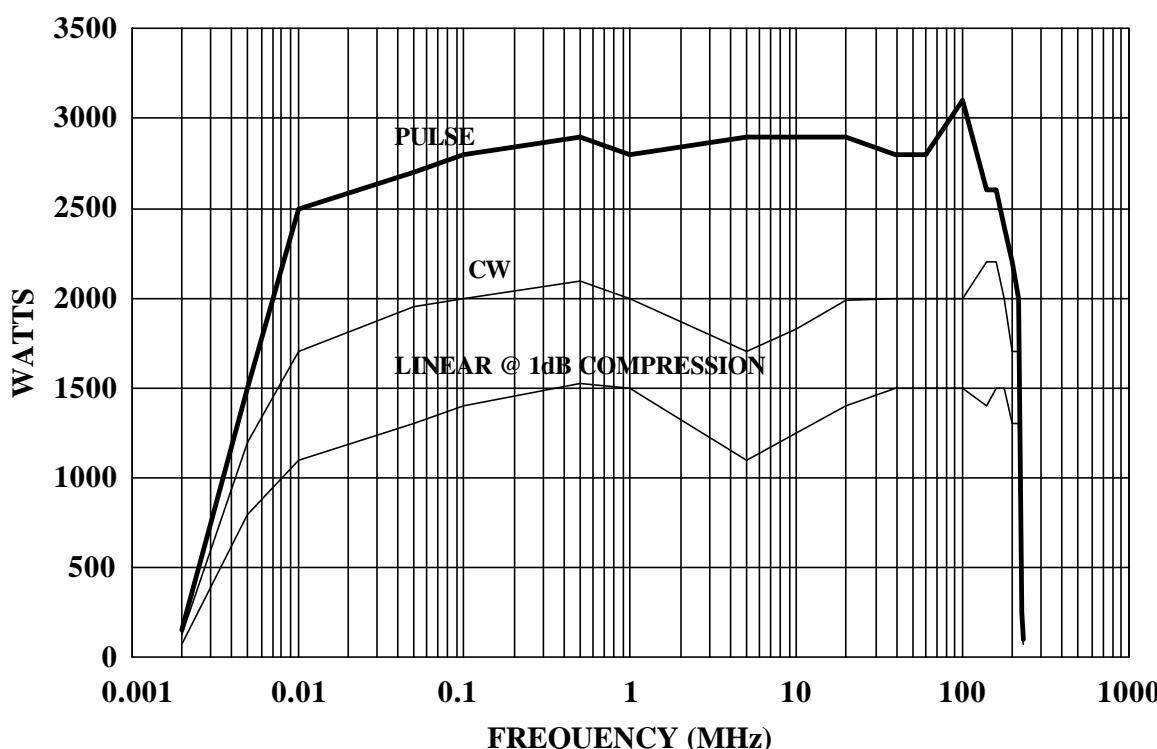

SPECIFICATIONS
Model 1000L

POWER OUTPUT

High Range

Pulse

Minimum 2500 watts to 150MHz
1750 watts to 220MHz

Duty Cycle 15%

Pulse Width 8 milliseconds

CW

Minimum 1200 watts

Low Range 100 watts nominal

FLATNESS, high range $\pm 1.5 \text{ dB}$

FREQUENCY RESPONSE 10 kHz - 220 MHz *instantaneously*

INPUT FOR RATED OUTPUT 1.0 milliwatt maximum

GAIN (at maximum setting)

High Range 61 dB minimum
Low Range 47 dB minimum

GAIN ADJUSTMENT (continuous range) 18 dB minimum

INPUT IMPEDANCE 50 ohms, VSWR 1.5:1 maximum

OUTPUT IMPEDANCE 50 ohms, nominal

MISMATCH TOLERANCE* 100% of rated power without foldback. Will operate without damage, or oscillation with any magnitude and phase of source and load impedance.

MODULATION CAPABILITY Linear amplitude and phase response to over 80 MHz allows faithful reproduction of AM, FM, Pulse, or phase modulation appearing on the input signal

HARMONIC DISTORTION AT 750 WATTS

Above 120 MHz Minus 30 dBc maximum
Below 120 MHz Minus 15 dBc maximum
Minus 18 dBc nominal

THIRD ORDER INTERCEPT POINT 66dBm Typical

GATING CHARACTERISTICS

Pulse Mode Pedestal/CW Mode Blanking

Signal (into 180 ohms) Plus or minus 2.5 to 6.0 VDC
Rise time 20 microseconds maximum
Fall time 4 microseconds maximum
RF Rise/Fall Time 10 nanoseconds maximum
RF Pulse Droop 1.0% maximum at 8 milliseconds

PRIMARY POWER (specify one) 200/208 $\pm 5\%$ VAC, 3 phase, 50/60 Hz
380/415 $\pm 5\%$ VAC, 3 phase, 50/60 Hz
400/415 $\pm 5\%$ VAC, 3 phase, 50/60Hz
15.2 kVA nominal

CONNECTORS

RF Input Type BNC female
RF Output, high range Type C female
RF Output, low range Type N female
Gating/Blanking Type BNC female
Remote Control 25 pin female subminiature D

COOLING Forced air (self contained fans)

WEIGHT 239 kg (525 lb)

SIZE (WxHxD) 56.1 x 149.9 x 58.4 cm
22.1 x 59.0 x 23.0 in

* See Application Note #27

SPECIFICATIONS

Model 25W1000A

POWER OUTPUT, CW

Nominal.....	40 watts
Minimum.....	25 watts
Linear @ 1dB compression.....	20 watts minimum

FLATNESS.....	±1.5 dB maximum ±1.0 dB typical
---------------	------------------------------------

FREQUENCY RESPONSE.....	1-1000 MHz instantaneously
-------------------------	----------------------------

INPUT FOR RATED OUTPUT.....	1.0 milliwatt maximum
-----------------------------	-----------------------

GAIN (at maximum setting).....	44 dB minimum
--------------------------------	---------------

GAIN ADJUSTMENT (continuous range).....	10 dB minimum
---	---------------

INPUT IMPEDANCE.....	50 ohms, VSWR 2.0:1 maximum
----------------------	-----------------------------

OUTPUT IMPEDANCE.....	50 ohms, nominal
-----------------------	------------------

MISMATCH TOLERANCE *.....	100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance.
---------------------------	---

MODULATION CAPABILITY.....	Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal
----------------------------	---

HARMONIC DISTORTION.....	Minus 20 dBc maximum at 25 watts
--------------------------	----------------------------------

THIRD ORDER INTERCEPT POINT.....	52 dBm typical
----------------------------------	----------------

PRIMARY POWER (selected automatically)	90-132, 180-264 VAC 50/60 Hz 325 watts maximum
--	--

CONNECTORS

RF Input.....	Type N female on front panel
RF Output.....	Type N female on front panel
Remote Control.....	25 pin female Subminiature D on rear panel

COOLING.....	Forced air (self contained fans)
--------------	----------------------------------

WEIGHT.....	16.0 kg (35 lb)
-------------	-----------------

SIZE (WxHxD).....	50.3 x 15.5 x 30.0 cm 19.8 x 6.1 x 11.8 in
-------------------	---

* See Application Note #27