


Advanced Test Equipment Rentals - www.atecorp.com 800-404-ATEC (2832)

3, 6 & 12 KV Surge/High Potential Tester

Proven reliability combined with rugged construction keeps the tester operating in the shop or in the field.

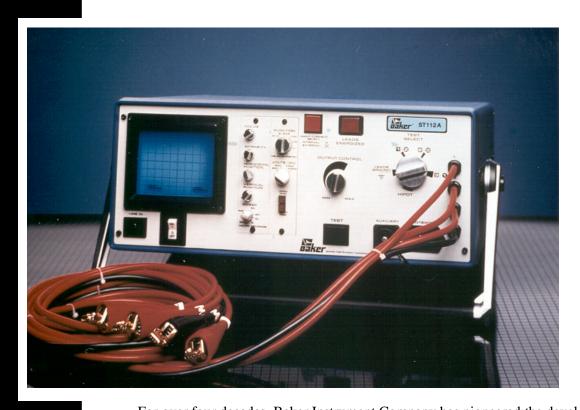

WITH BAKER'S

3, 6 & 12 KV

TESTERS YOU

CAN VERIFY

THE QUALITY

OF NEW OR

REWOUND

WINDINGS

BEFORE YOU

DEPEND ON

PERFORMANCE.

HAVE TO

THEIR

For over four decades, Baker Instrument Company has pioneered the development and manufacture of diagnostic test equipment for all types of electrical rotating machinery. This generation of quality ST103A, ST106A and ST112A testers reaps the benefit of nearly 40 years of engineering excellence. Proven reliability combined with rugged construction keeps this tester operating in the shop or in the field.

What's New?

- Greater current resolution for Polarization Index/Dielectric Absorption Tests and during Hipot Testing.
- Total tester control from the front panel and easily accessible connectors.
- All Leads Grounded selector position helps ensure operator safety.
- Zero Start Interlock ensures operator safety and a low initial voltage to prevent insulation damage.*

VERSATILE COMBINATIONS

- Add the AT101
 High-Current Surge
 TestAdaptor and
 perform bar-to-bar
 low impedance DC
 armature tests. Barto-Bar test are
 specified by the
 major armature
 manufacturers.

MISCELLANEOUS

- Footswitch and Auxiliary Test connectors are standard.
- One-year Baker
 Warrantyonparts
 and Labor.

Versatility makes this tester an essential component for both corrective and predictive maintenance procedures. The capability to test all insulation systems of coils and windings ma this unit ideal for use on motors, generators, transformers, chokes, solenoids, and a variety of other coils.

With Baker's 3, 6 and 12KV testers, you can verify the quality of new or rewound windings before you have to depend on their performance. Whether you're in the shop, in the plant, or in the field, the Baker tester offers you the capability to troubleshoot, diagnose, and predict motor failures before they happen.

SPECIFICATIONS:*

	ST103	ST106	ST112
SURGE TEST:			
Maximum OutputVoltage	3,000 volts	6,000 volts	12,000volts
Maximum Output Current	200 amps peak	380 amps peak	800 amps peak
Maximum Pulse Energy	.18 joules	.72 joules	2.88 joules
Minimum Test Inductance (all models): 30-40 Micr	oHenries	· ·

DC HIGHPOTENTIALTEST:

Maximum OutputVoltage	3,000 volts	6,000 volts	12,000volts
Maximum Output Current	1,000 MicroAmps	1,000 MicroAmps	1,000 MicroAmps
Overcurrent Trip	10/100/1000 MicroAmps	10/100/1000 MicroAmps	10/100/1000 MicroAmps
Current Resolution	1/10/100 MicroAmps	1/10/100 MicroAmps	1/10/100 MicroAmps

PHYSICAL CHARACTERISTICS

Weight (Kilograms/pounds) 20/42

Dimensions (W x H x D) 471 x 191 x 412 mm/19 x 8 x 16 in.

200hp/600V

POWERREQUIREMENTS 120vac/118 watts 120vac/118 watts 120vac/333 watts

500hp/2400V

RECOMMENDED MAXIMUMTEST MOTOR SIZE

* Datasubjecttochangewithoutnotice. PrintedinUSA10/99.



- Convenient, front panel user friendlycontrols.
- Instrument Grounded warningdetector
- Test lead insulation ratedat45Kilovolts
- Leads Energized warning indicator
- All LeadsGrounded Test switch position
- 3-Phase Test Select Switch

PERFORMANCE/DURABILITY

- Baker's exclusive QRR high-voltage component design.
- Autoranging overcurrent Trip settings (low trip at 10MicroAmps), and visual Overcurrent Warning Indicator.
- Leakage current displayed on CRTgives quickest indication of faults, and provides a real-time, visual reference for controlling high-voltage test.
- Specially designed CRTdisplaycircuits are built for maximum reliability in the shop or in the field.



BAKERINSTRUMENT COMPANY
POBOx587*FortCollins, Colorado80522
(970)282-1200*(800)752-8272*fax(970)282-1010
www.bakerinst.com

1000hp/4160V