## **SCHONSTEDT** \*\*\*

SPX

XT-512 Locates Blockages Quickly

Combining the portability of the XTpc with the low frequency sonde and passive locating capability found in larger more cumbersome locators, the XT-512 will quickly locate and determine the depth of your sewer/pipe inspection camera or small sonde.



## **Optimized for locating**


- Blockages in non-metallic pipe
- Sewer inspection cameras
- Small sondes









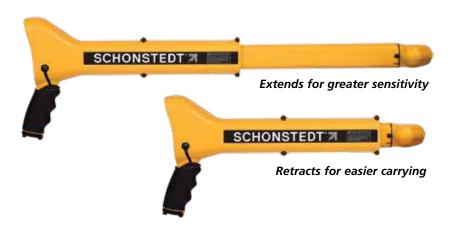



- Operates on 512 Hz Frequency mode
- Passive detection of 50Hz or 60Hz, and sonde
- One button depth measurement
- Digital readout display of signal strength (peak)
- Audio & Visual Output
- Battery & Sensitivity Indicators
- Extends and retracts for easy carrying & storage



Receiver Specifications	
Operating Frequency:	512 Hz plus 50/60 Hz passive detection
Battery:	One 9V Battery
Battery Life:	18 Hours (intermittent use)
LCD Display:	3.5" Digit Reflective Signal Strength, Directional Arrows, Battery Status, Volume and Depth on Sonde
Controls:	ON/Volume adjustment, OFF, DEPTH, SONDE, AUTO GAIN, UP gain, DOWN gain, PASSIVE
Dimensions:	Unit extended: 27.7 in (~70 cm), Unit collapsed: 17.5 in (~44 cm)
Weight:	Under 2.5 lbs
Operating Temperature:	-4°F to 140°F (-20°C to 70°C)
Dust & Water Protection:	Rated IP54

Copyright © 2018 Schonstedt Instrument Company. All rights reserved. Schonstedt is a subsidiary of SPX Corporation. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Schonstedt Instrument Company.

## **SCHONSTEDT**°

Contact Us:

Find Your Local Dealer:

800-999-8280 schonstedt.info@spx.com

schonstedt.com