

### FEATURES

- Rack mounted system
- High Power Class AB linear GaN design
- Instantaneous ultra wide bandwidth
- Suitable for all single channel modulation standards
- Built-in protection circuits
- High reliability and ruggedness



### ELECTRICAL SPECIFICATIONS Into 50 Ohm load

Parameter	Specification	Notes
Operating Frequency Range	6.0 - 18.0 GHz	
Power Output @ Psat	40 Watt Min	CW
Power Output @ P1dB GCP	20 Watt Typ	CW
Power Gain	46 dB Min	
Power Gain Flatness	4.0 dB p-p Max	Constant input power
Input / Output Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	-30 dBc Typ	36dBm/Tone, Δ = 1MHz
Harmonics	>10 dBc Typ	At rated output
Non Harmonic Spurious	-60 dBc Min	
Operating Voltage	100 - 240 VAC Nom	50/60 Hz
Power Consumption	800 Watt Max	At rated output
Max Input Power Protection	+3 dBm	<10 Seconds Nominal Pin=0dBm
Load VSWR Protection	5 : 1	Self-initiated shutdown
High Temperature Protection	Automatic Shutdown	


### ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-20 to +85 °C	
Relative Humidity	5 to 95 %	Non Condensation
Shock/Vibration	Normal truck transportation	

### MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	430 x 133 x 560 mm	3U - Excluding connectors
Weight	20 Kg. Max	
RF Connectors In/Out/Reference	Precision Hi Frequency Type-N Female	
AC Power / Control Connector	IEC 60320-C14 / 9-Pin D-Sub	
Cooling	Built in Fan Cooling	Variable speed
<b>OPTIONAL:</b> Digital Monitor & Control FWD, REV, VSWR, GAIN, ALC, V & I, TEMP	Ethernet RJ-45 TCP/IP, RS422/485 Optional GPIB Interface	Remote <a href="#">Bluetooth</a> application

### OUTLINE DRAWING

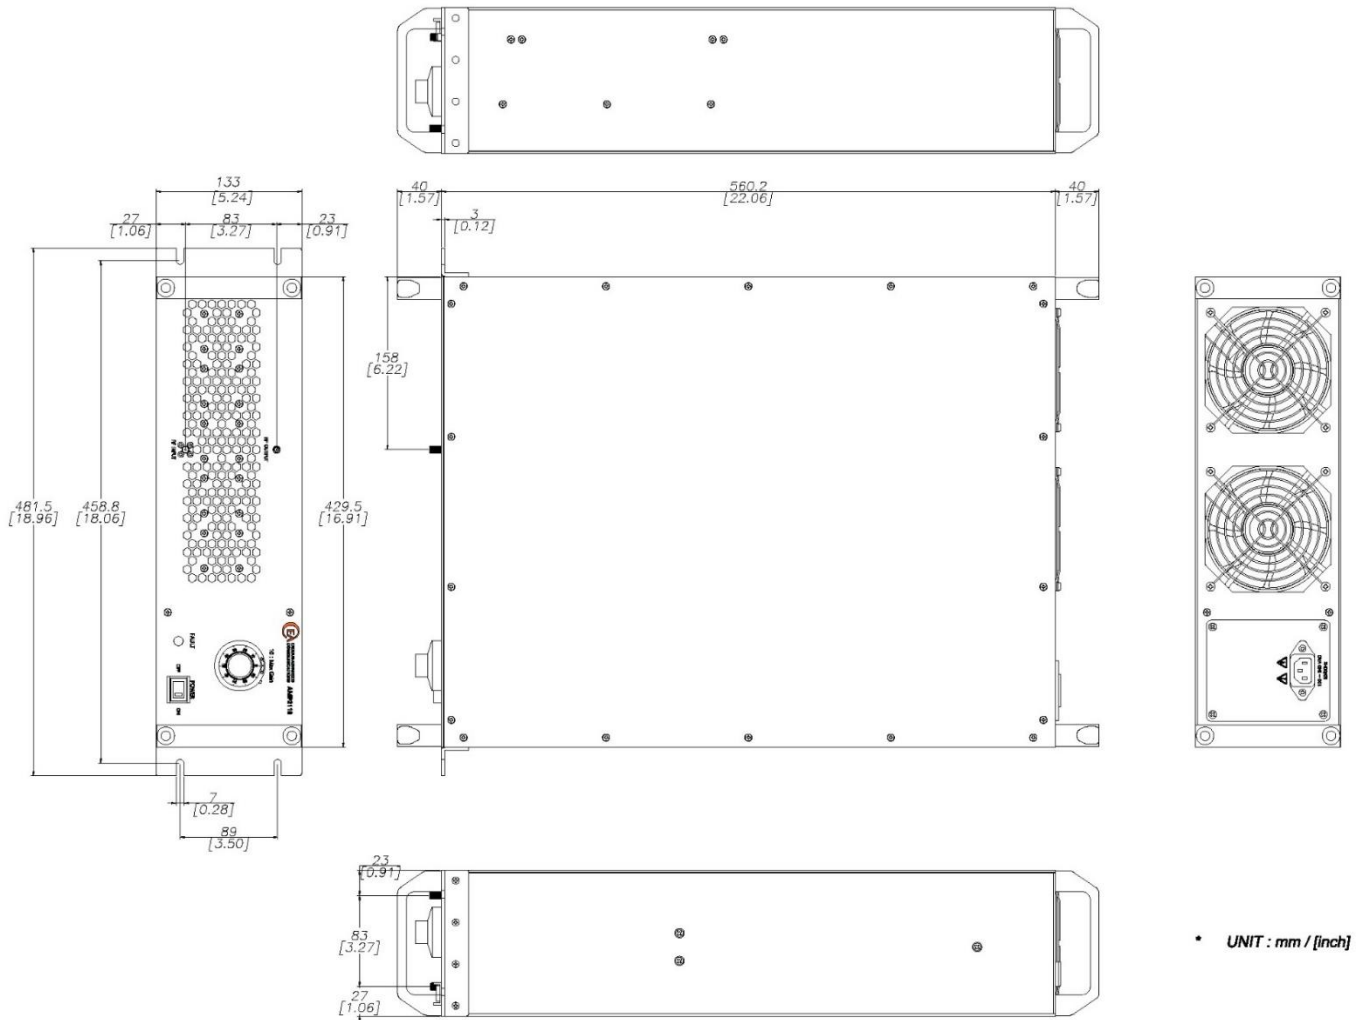



**AA-618G-40**  
**SOLID STATE HIGH POWER AMPLIFIER**